

Dimension Sheets
Electric Wire Rope Hoist NOVA

1. NOVA NB

2. NOVA NC

3. NOVA ND

4. NOVA NE

5. NOVA NF

PROD_REF	HOIST_TYPE	REEVING	DRAWING_NR
NC-F-02	HOIST; FIXED	2 ROPE FALLS	D002086-A
NC-F-04	HOIST; FIXED	4 ROPE FALLS	D002091-A
NC-F-06	HOIST; FIXED	6 ROPE FALLS	D002098-A
NC-F-08	HOIST; FIXED	8 ROPE FALLS	D002102-A
NC-L-02	TROLLEY; LOW HEADROOM	2 ROPE FALLS	D002087-A
NC-L-04	TROLLEY; LOW HEADROOM	4 ROPE FALLS	D002092-A
NC-L-04-X	TROLLEY; LOW HEADROOM	4 ROPE FALLS, 6300 kg	D002093-A
NC-L-A2	TROLLEY; LOW HEADROOM	2 ROPE FALLS	D002106-A
NC-L-A4	TROLLEY; LOW HEADROOM	4 ROPE FALLS	D002107-A
NC-N-02	TROLLEY; NORMAL HEADROOM	2 ROPE FALLS	D002090-A
NC-N-04	TROLLEY; NORMAL HEADROOM	4 ROPE FALLS	D002097-A
NC-N-06	TROLLEY; NORMAL HEADROOM	6 ROPE FALLS	D002100-A
NC-N-08	TROLLEY; NORMAL HEADROOM	8 ROPE FALLS	D002104-A
NC-H-02	TROLLEY; DOUBLE GIRDER	HIGH, 2 ROPE FALLS	D002229-A
NC-H-04	TROLLEY; DOUBLE GIRDER	HIGH, 4 ROPE FALLS	D002230-A
NC-H-06	TROLLEY; DOUBLE GIRDER	HIGH, 6 ROPE FALLS	D002236-A
NC-H-08	TROLLEY; DOUBLE GIRDER	HIGH, 8 ROPE FALLS	D002237-A
NC-M-02	TROLLEY; DOUBLE GIRDER	MEDIUM, 2 ROPE FALLS	D002088-A
NC-M-04	TROLLEY; DOUBLE GIRDER	MEDIUM, 4 ROPE FALLS	D002095-A
NC-M-06	TROLLEY; DOUBLE GIRDER	MEDIUM, 6 ROPE FALLS	D002099-A
NC-M-08	TROLLEY; DOUBLE GIRDER	MEDIUM, 8 ROPE FALLS	D002103-A
NC-V-M1	HOIST; MACHINERY HOIST	1 ROPE FALL	D002108-A
NC-V-M2	HOIST; MACHINERY HOIST	2 ROPE FALLS, OPPOSITE DIRECT	D002109-A
NC-V-M2	HOIST; MACHINERY HOIST	2 ROPE FALLS, SAME DIRECTION	D002110-A

NOVA




Elektroseilzug
Electric wire rope hoist

HOIST: FIXED, 2 ROPE FALLS

Hoist type:
NC02F...

SWF
KRANTECHNIK

SI - 50Hz

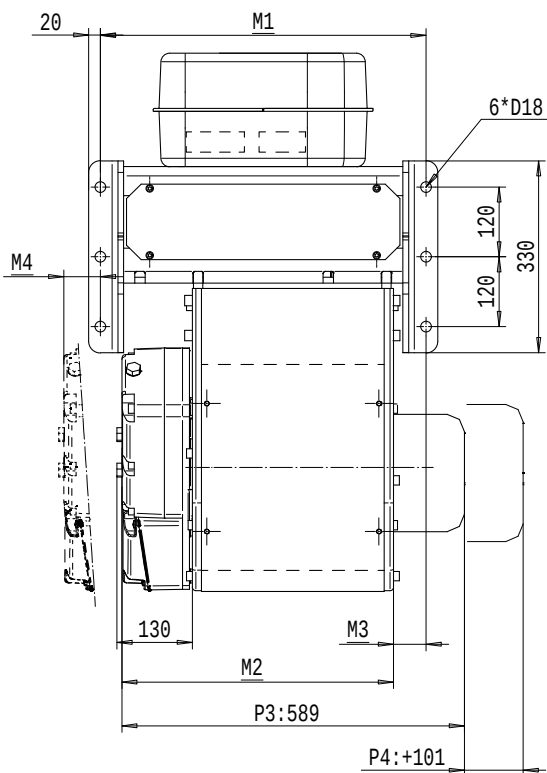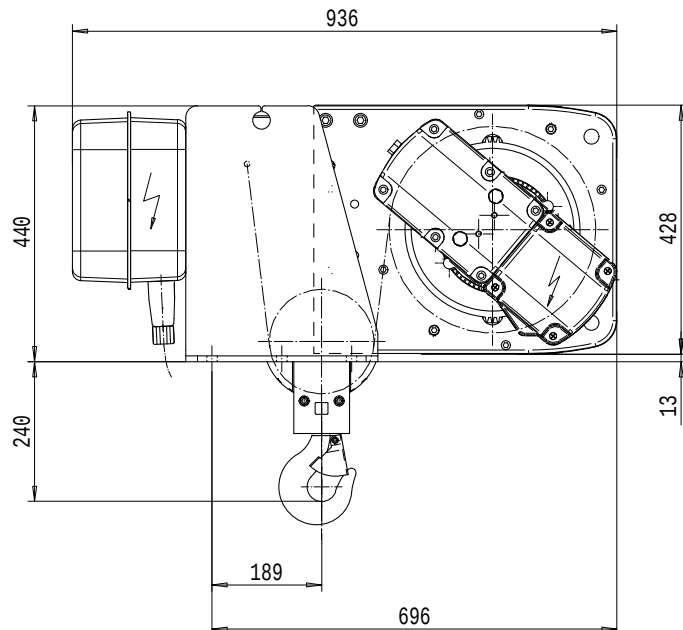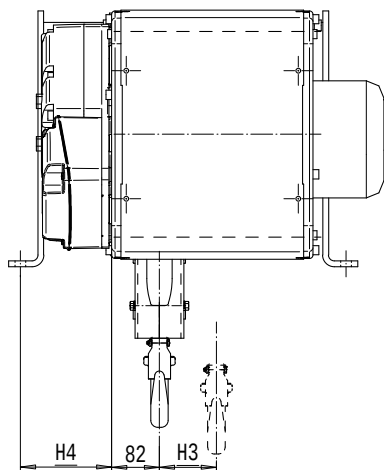

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		E+P3	F+P3	H+P4
2000	3m/M6	8/1,3	10/1,7	16/2,7
2500	2m/M5	8/1,3	10/1,7	16/2,7
3200	1Am/M4	8/1,3	-	-
+ weight (kg):		-	-	20

HOL (m)	Length code	M1 (mm)	M2 (mm)	M3 (mm)	M4 (mm)	H3 (mm)	H4 (mm)	Weight (kg)
12	B	560	467	56	-37	98	157	195
18	C	560	567	56	63	147	57	205
24	D	780	667	176	63	196	57	220
30	E	780	787	56	63	256	57	240

NOVA




Elektroseilzug
Electric wire rope hoist

HOIST; FIXED, 4 ROPE FALLS

Hoist type:
NC04F...

SWF
KRANTECHNIK

SI-50Hz

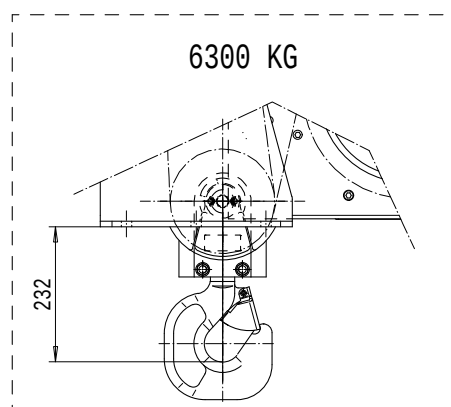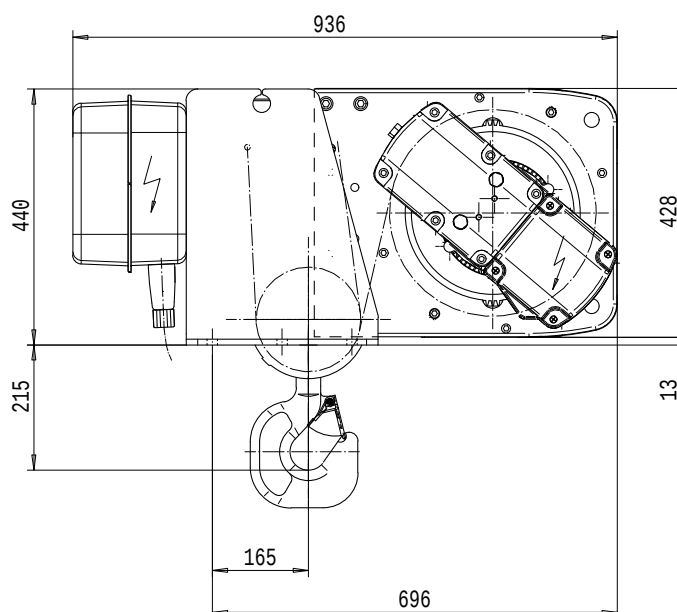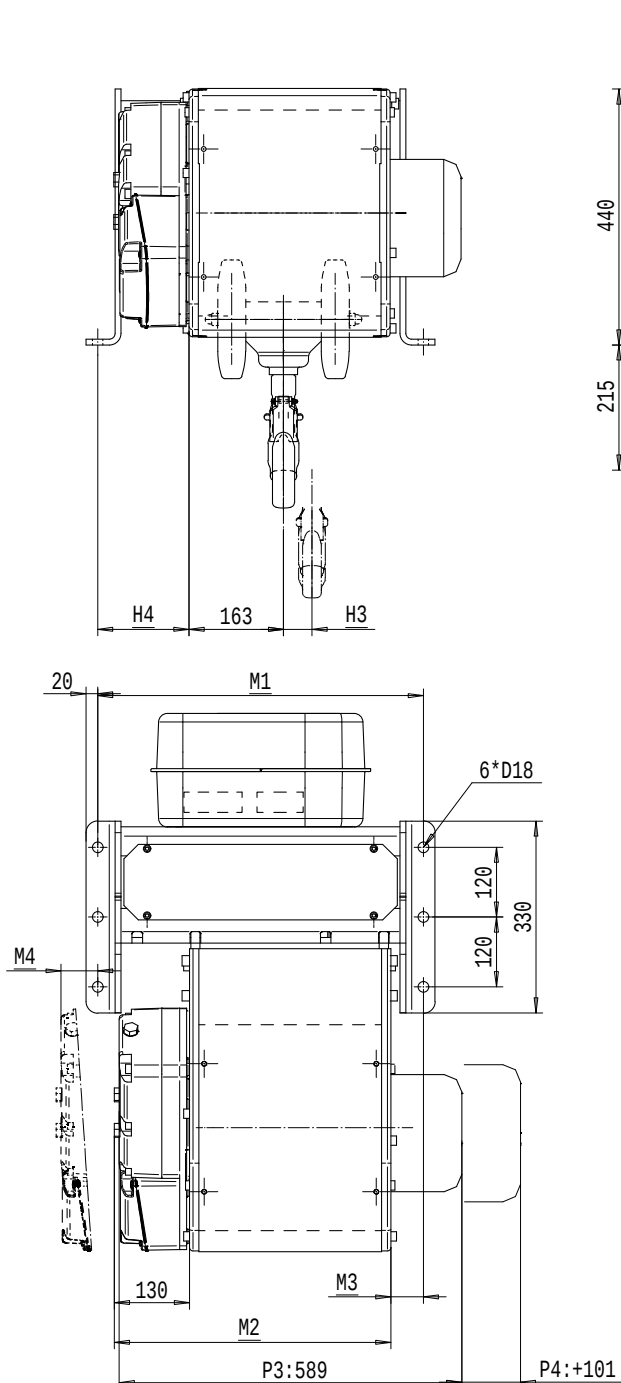

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		E+P3	F+P3	H+P4
4000	3m/M6	4/0,7	5/0,8	8/1,3
5000	2m/M5	4/0,7	5/0,8	8/1,3
6300	1Am/M4	4/0,7	-	-
+ weight (kg):		-	-	20

HOL (m)	Length code	M1 (mm)	M2 (mm)	M3 (mm)	M4 (mm)	H3 (mm)	H4 (mm)	Weight (kg)
6	B	560	467	56	-37	49	157	200
9	C	560	567	56	63	73	57	210
12	D	780	667	176	63	97	57	220
15	E	780	787	56	63	127	57	230

NOVA



Elektroseilzug
Electric wire rope hoist

HOIST; FIXED, 6 ROPE FALLS

Hoist type:
NC06F...

SWF
KRANTECHNIK

SI - 50Hz

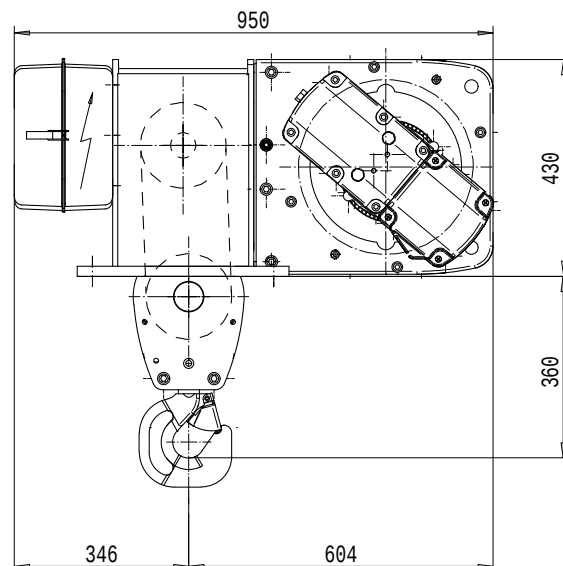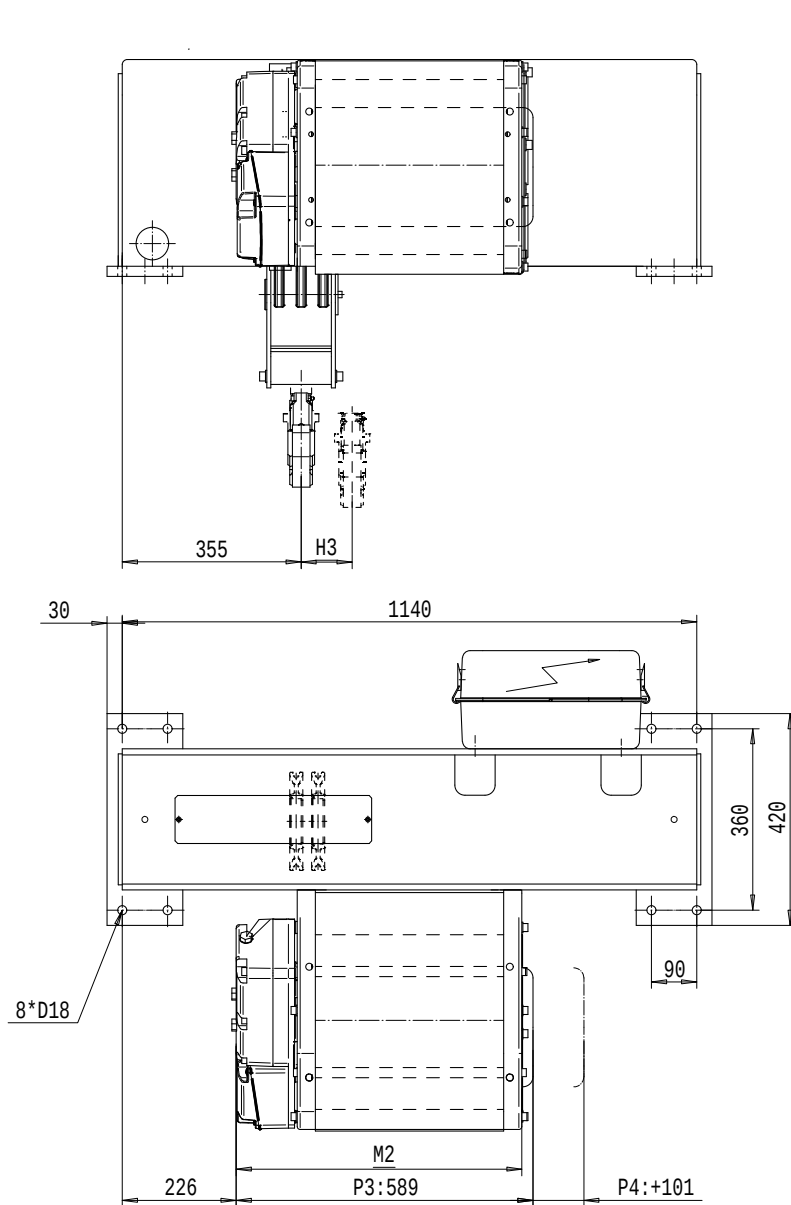

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)	
		Gear+Motor code:	
		F+P3	H+P4
6000	3m/M6	3,2/0,5	5/0,8
7500	2m/M5	3,2/0,5	5/0,8
+ weight (kg):		-	20

HOL (m)	Length code	M2 (mm)	H3 (mm)	Weight (kg)
6	C	567	49	350
8	D	667	65	365
10	E	787	85	380

NOVA


Elektroseilzug
Electric wire rope hoist

HOIST; FIXED, 8 ROPE FALLS

Hoist type:
NC08F...

SWF
KRANTECHNIK

SI-50Hz

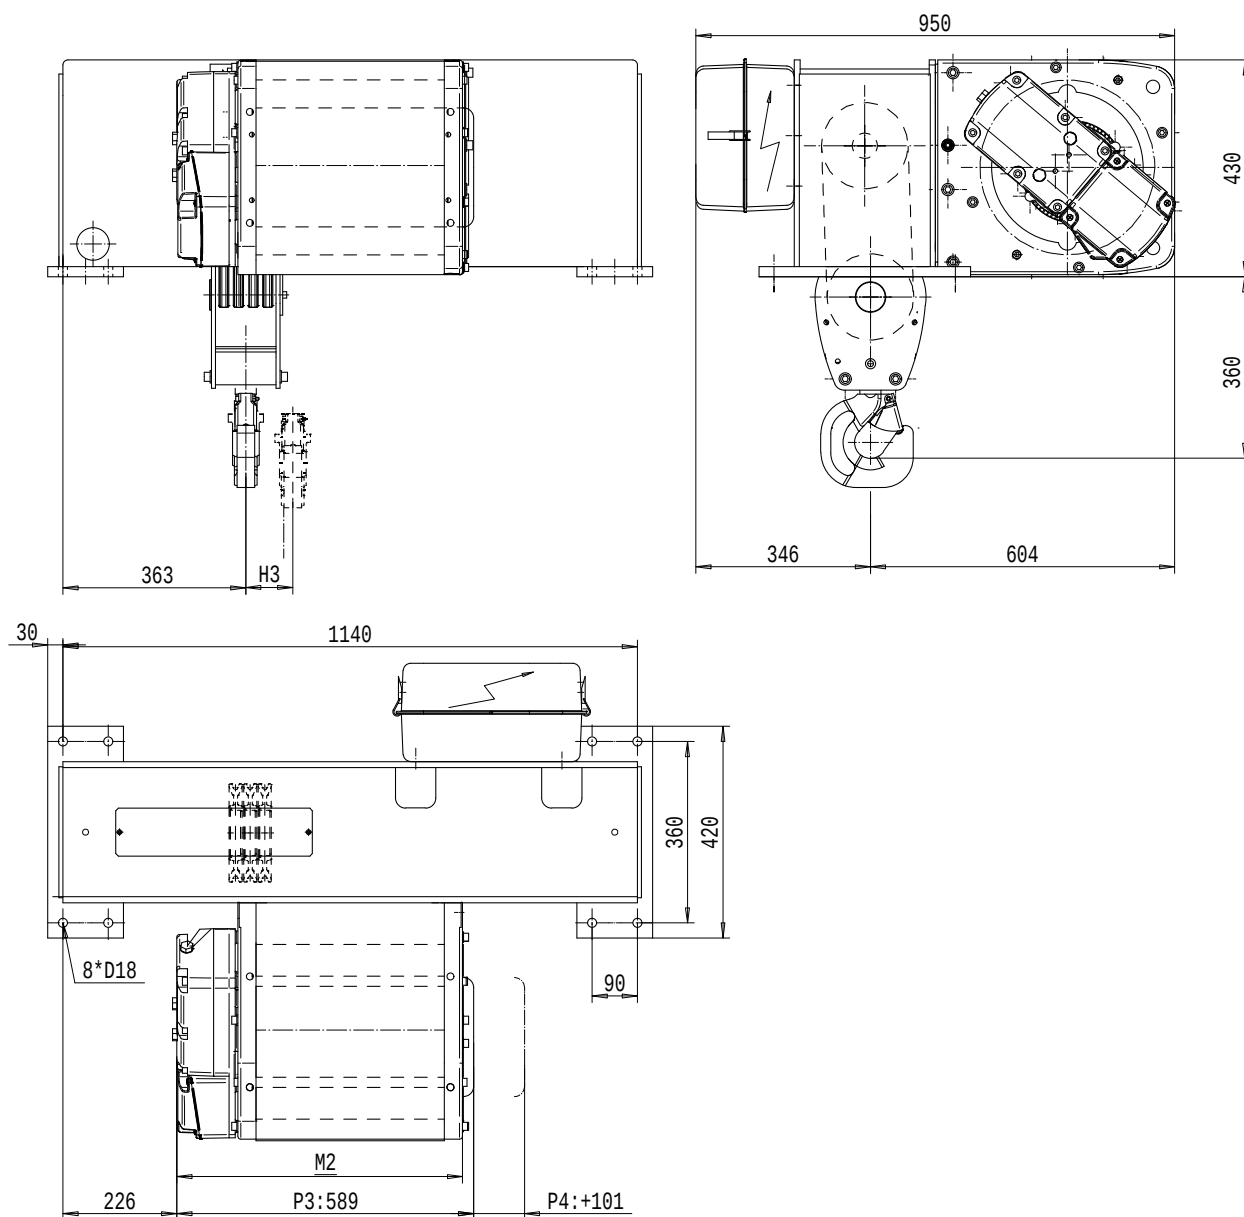

Load (kg)	Class Fem/ISO	Hoisting speed (m/min) Gear+Motor code:	
		F+P3	H+P4
8000	2m/M5	2,5/0,4	4/0,7
10000	1Am/M4	2,5/0,4	4/0,7
+ weight (kg):		-	20

HOL (m)	Length code	M2 (mm)	H3 (mm)	Weight (kg)
4,5	C	567	37	360
6	D	667	49	375
7,5	E	787	64	390

NOVA





Elektroseilzug
Electric wire rope hoist

TROLLEY; LOW HEADROOM, 2 ROPE FALLS

Hoist type:
NC02L...

SWF
KRANTECHNIK

SI-50Hz

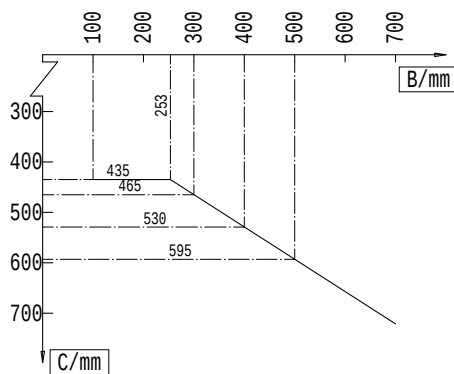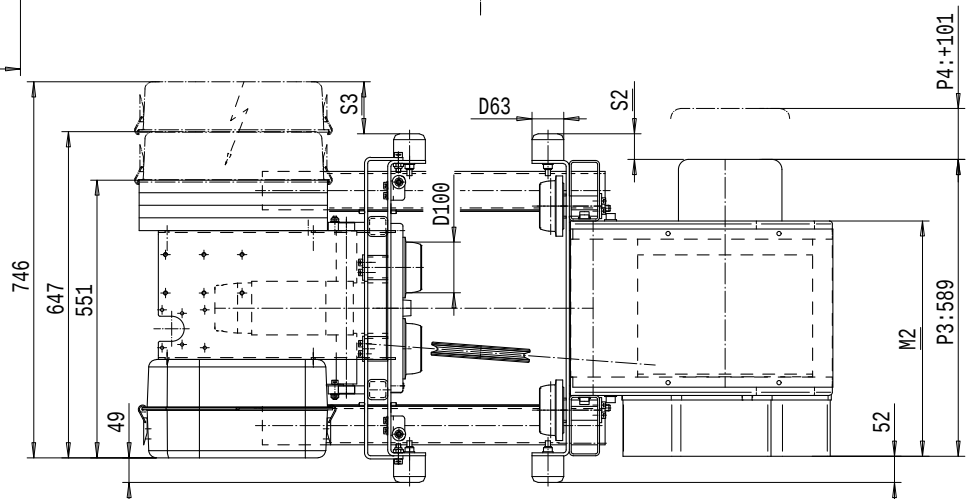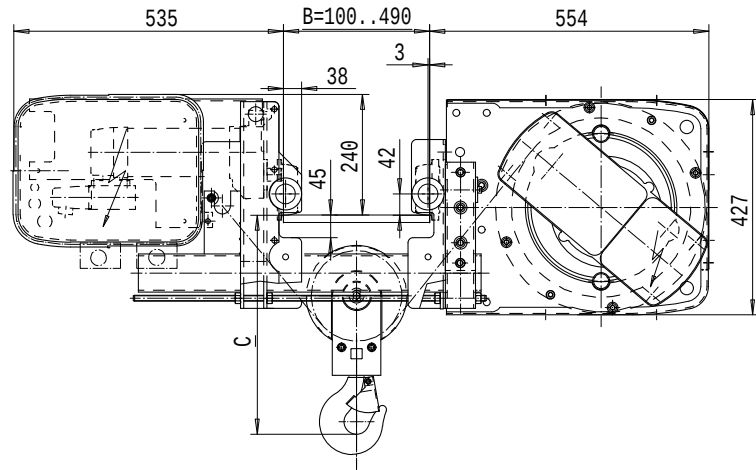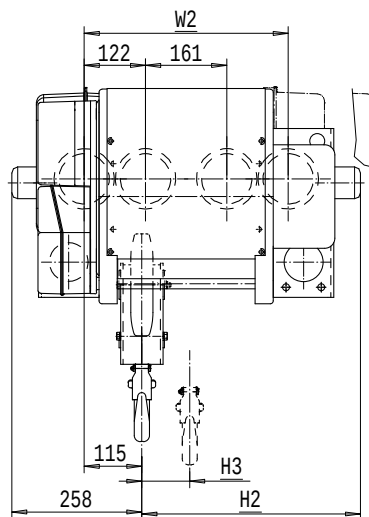

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		E+P3	F+P3	H+P4
2000	3m/M6	8/1,3	10/1,7	16/2,7
2500	2m/M5	8/1,3	10/1,7	16/2,7
3200	1Am/M4	8/1,3	-	-
+ weight (kg):		-	-	40

HOL (m)	Length code	M2 (mm)	H2 (mm)	H3 (mm)	S2 (mm)	S3 (mm)	W2 (mm)	Weight (kg)
12	B	467	434	95	51	78	405	325
18	C	567	534	144	151	-22	505	345
24	D	667	634	193	251	-122	605	365

NOVA


Elektroseilzug
Electric wire rope hoist

TROLLEY; LOW HEADROOM, 4 ROPE FALLS

Hoist type:
NC04L...

SWF
KRANTECHNIK

SI-50Hz

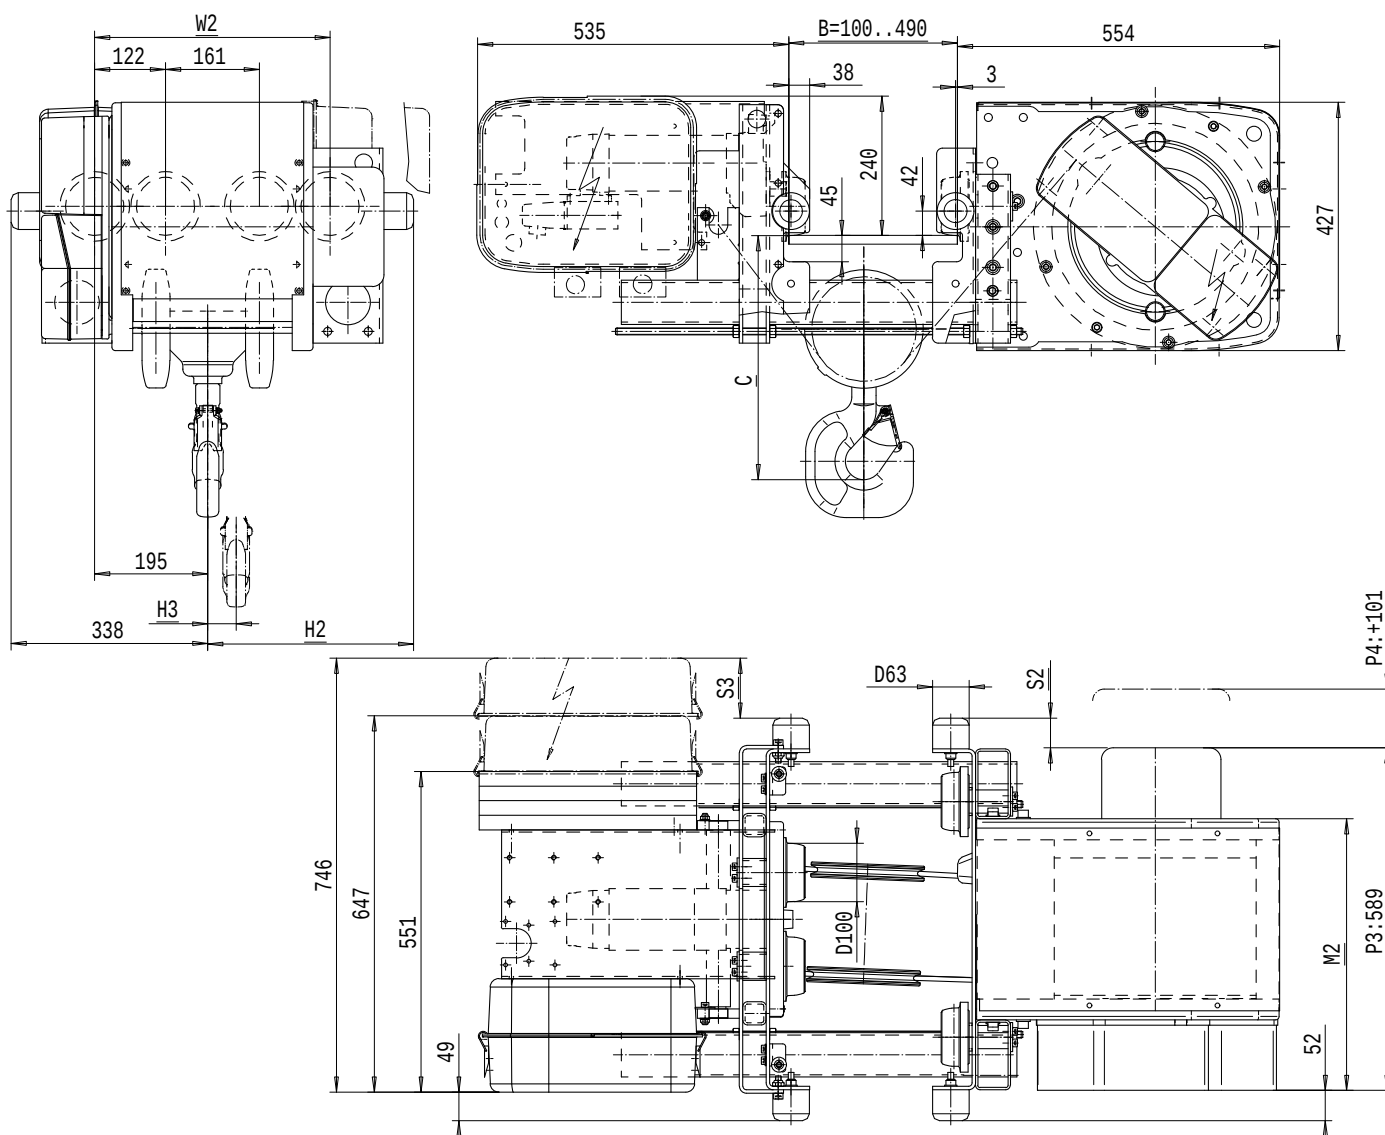

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)	
		Gear+Motor code:	
		F+P3	H+P4
4000	3m/M6	5/0,8	8/1,3
5000	2m/M5	5/0,8	8/1,3
+ weight (kg):		-	40

HOL (m)	Length code	M2 (mm)	H2 (mm)	H3 (mm)	S2 (mm)	S3 (mm)	W2 (mm)	Weight (kg)
6	B	467	354	49	51	78	405	330
9	C	567	454	74	151	-22	505	350
12	D	667	554	99	251	-122	605	370

NOVA Elektroseilzug





Electric wire rope hoist

TROLLEY; LOW HEADROOM, 4 ROPE FALLS, 6300 kg

SWF
KRANTECHNIK

SI-50Hz

Hoist type:
NC04LX...

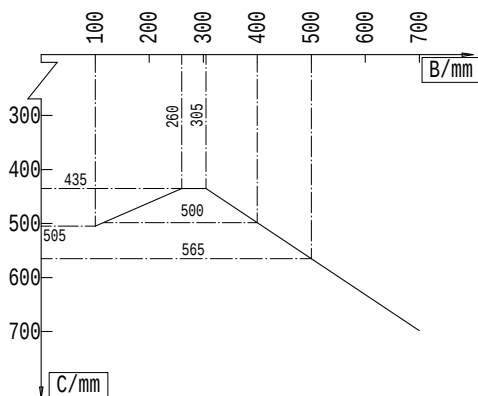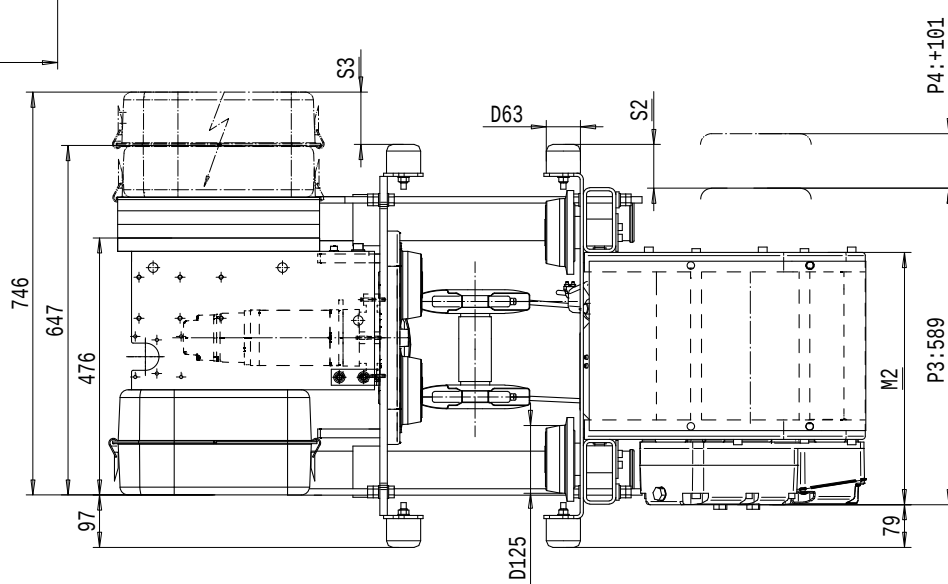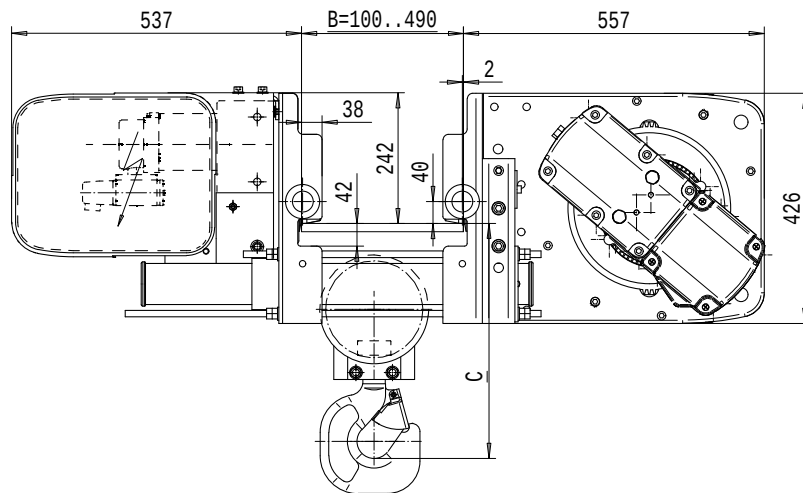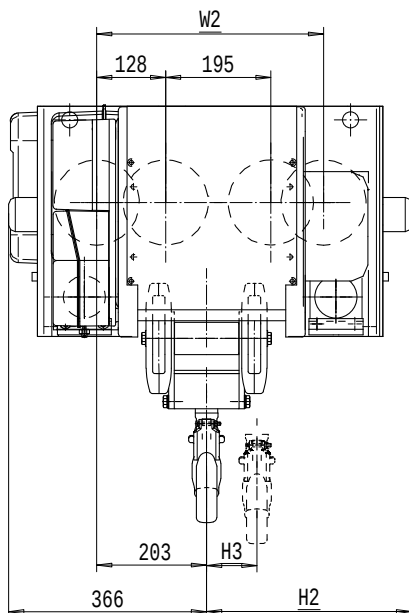

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)
		Gear+Motor code:
		E+P3
6300	1Am/M4	4/0, 7


HOL (m)	Length code	M2 (mm)	H2 (mm)	H3 (mm)	S2 (mm)	S3 (mm)	W2 (mm)	Weight (kg)
6	B	467	380	49	81	97	420	330
9	C	567	480	74	181	-3	520	350
12	D	667	580	99	281	-103	620	370

TROLLEY; LOW HEADROOM, 2 ROPE FALLS, 1600 kg

Hoist type:

NC02L...

SI-50Hz


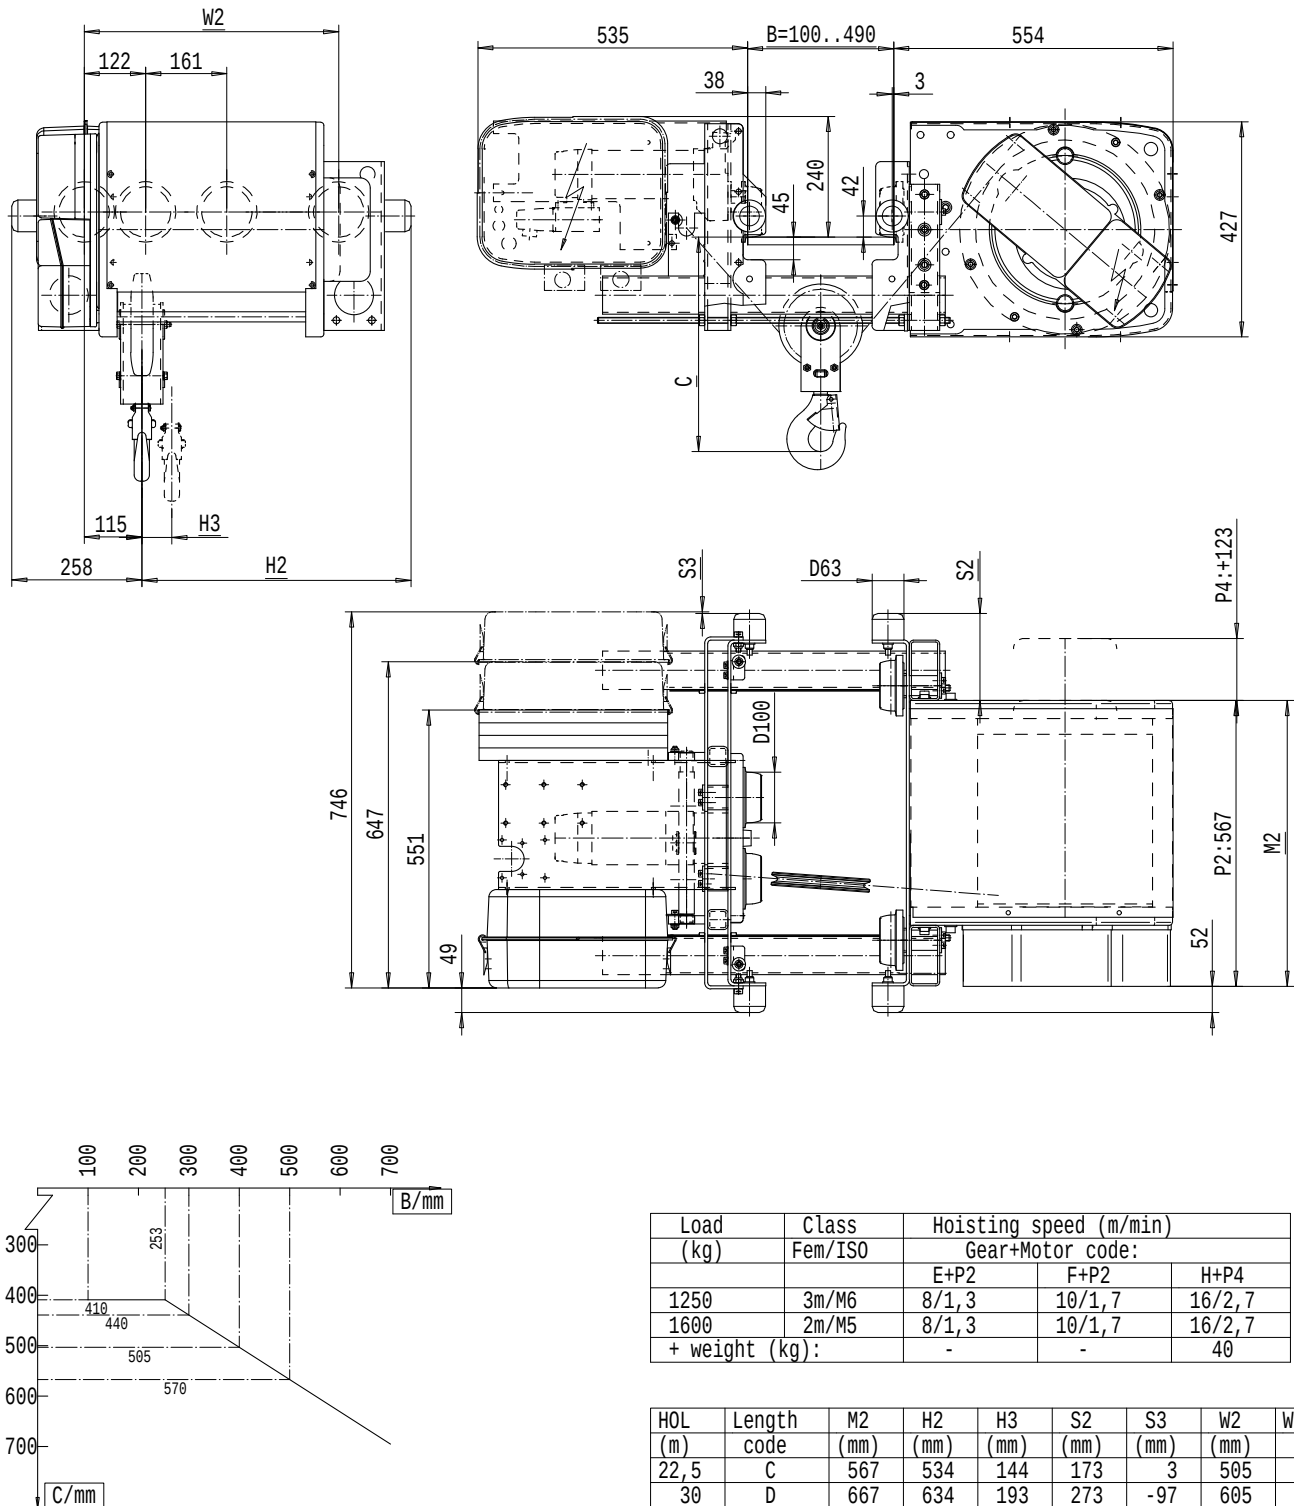


TROLLEY; LOW HEADROOM, 4 ROPE FALLS, 3200 kg

Hoist type:

NC04L...

SI-50Hz

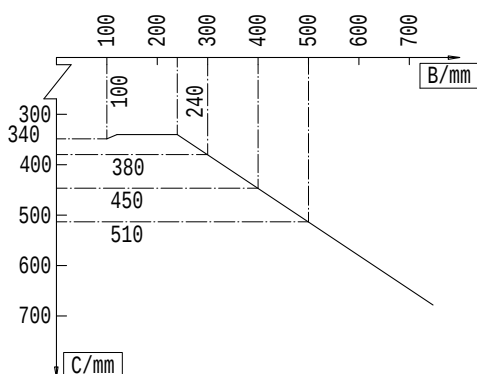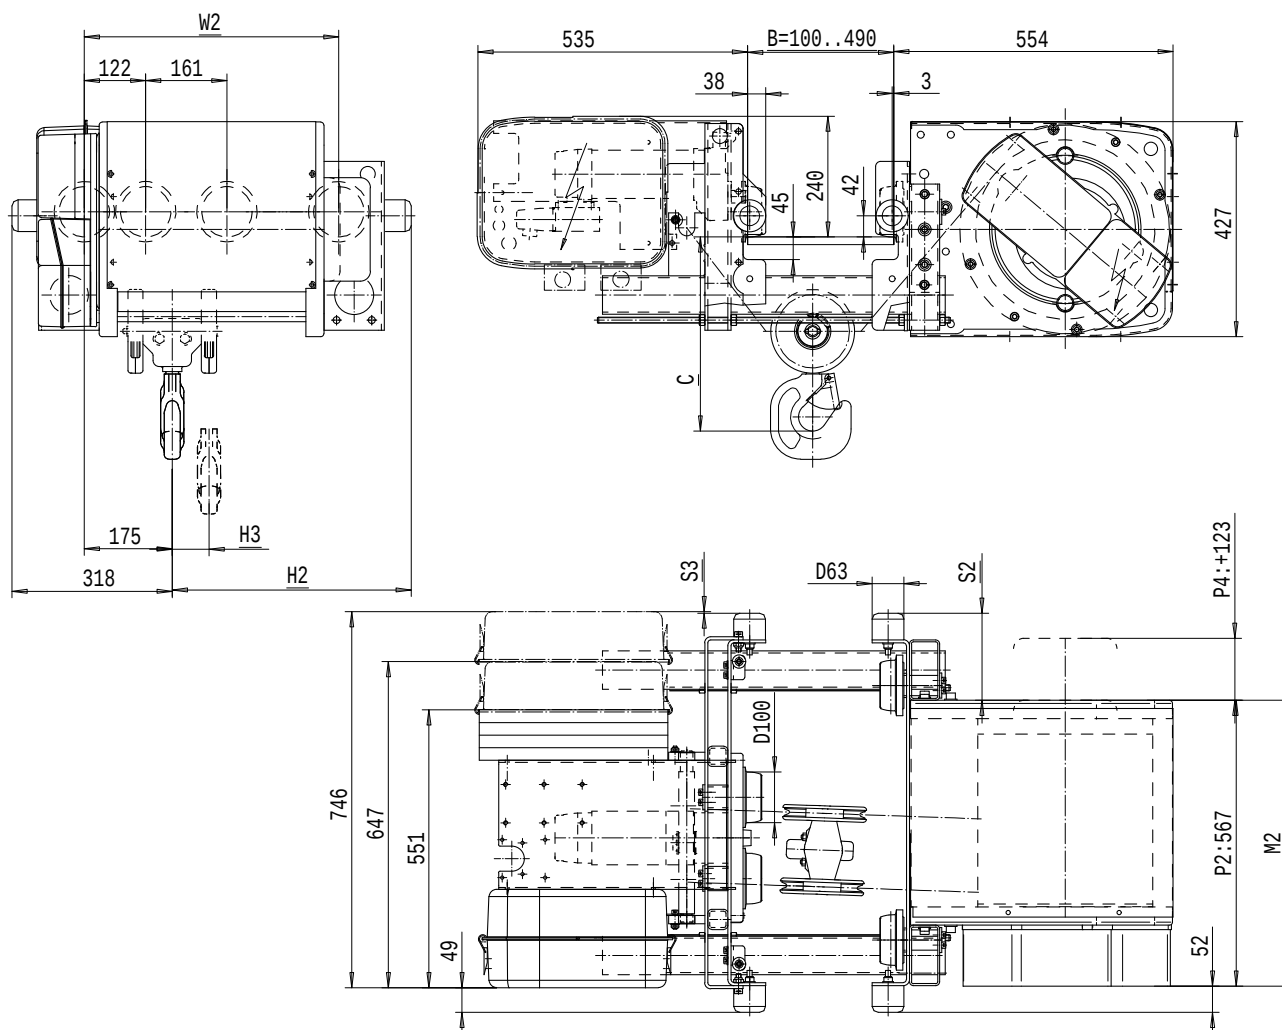

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		E+P2	F+P2	H+P4
2500	3m/M6	4/0,7	5/0,8	8/1,3
3200	2m/M5	4/0,7	5/0,8	8/1,3
+ weight (kg):		-	-	40

HOL (m)	Length code	M2 (mm)	H2 (mm)	H3 (mm)	S2 (mm)	S3 (mm)	W2 (mm)	Weight (kg)
11	C	567	474	73	173	3	505	335
15	D	667	574	99	273	-97	605	355

NOVA




Elektroseilzug
Electric wire rope hoist

TROLLEY: NORMAL HEADROOM, 2 ROPE FALLS

Hoist type:
NC02N...

SWF
KRANTECHNIK

SI-50Hz

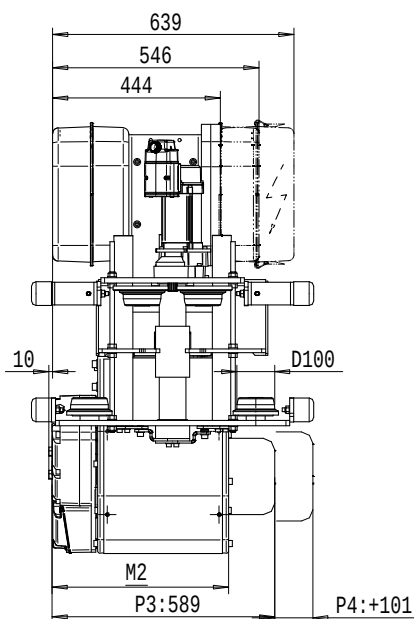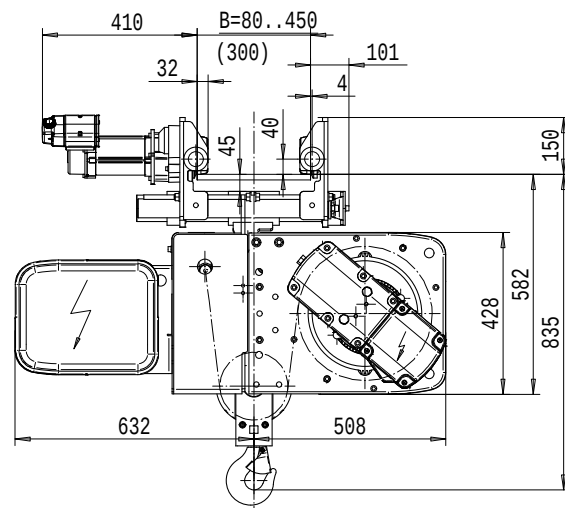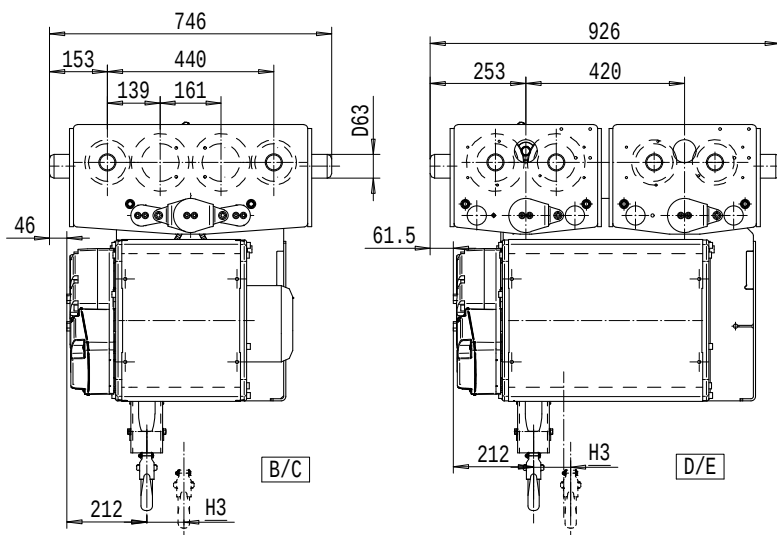

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		E+P3	F+P3	H+P4
2000	3m/M6	8/1,3	10/1,7	16/2,7
2500	2m/M5	8/1,3	10/1,7	16/2,7
3200	1Am/M4	8/1,3	-	-

+ weight (kg):

Note:

Weight calculated, when B=300mm

HOL (m)	Length code	M2 (mm)	H3 (mm)	Weight (kg)
12	B	467	98	325
18	C	567	147	345
24	D	667	198	405
30	E	787	258	425

NOVA





Elektroseilzug
Electric wire rope hoist

TROLLEY; NORMAL HEADROOM, 4 ROPE FALLS

Hoist type:
NC04N...

SWF
KRANTECHNIK

SI-50Hz

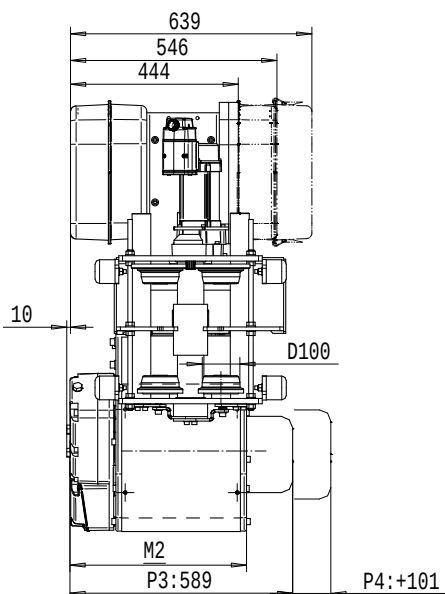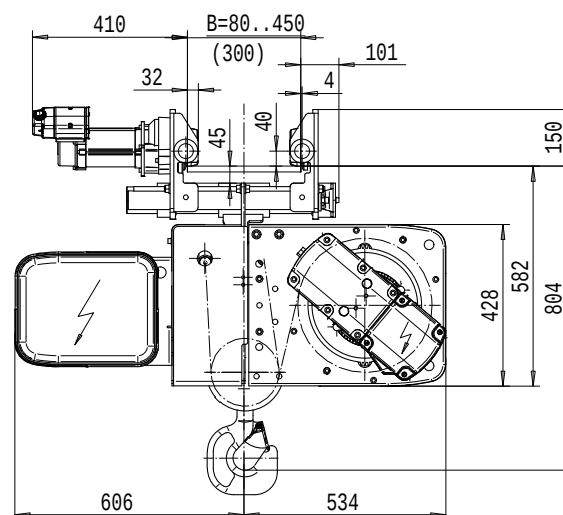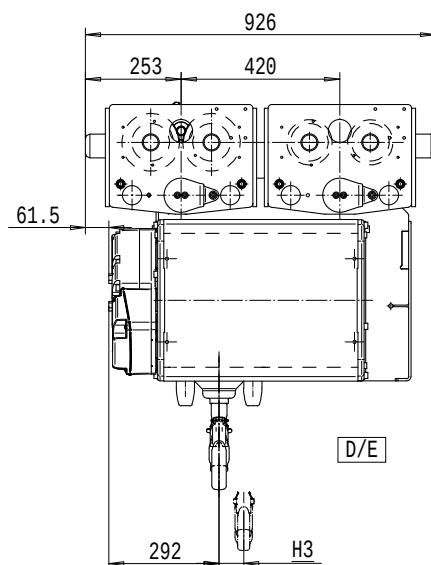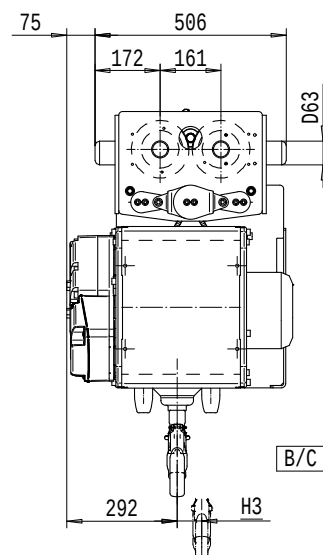

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)	
		Gear+Motor code:	
		F+P3	H+P4
4000	3m/M6	5/0,8	8/1,3
5000	2m/M5	5/0,8	8/1,3
+ weight (kg):		-	40

HOL (m)	Length code	M2 (mm)	H3 (mm)	Weight (kg)
6	B	467	49	330
9	C	567	73	350
12	D	667	97	410
15	E	787	121	430

NOVA Elektroseilzug




Electric wire rope hoist

TROLLEY; NORMAL HEADROOM, 6 ROPE FALLS

Hoist type:
NC06N...

SWF
KRANTECHNIK

SI-50Hz

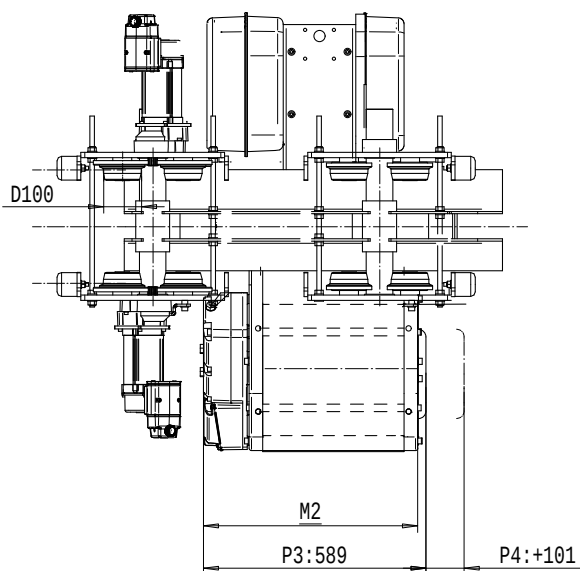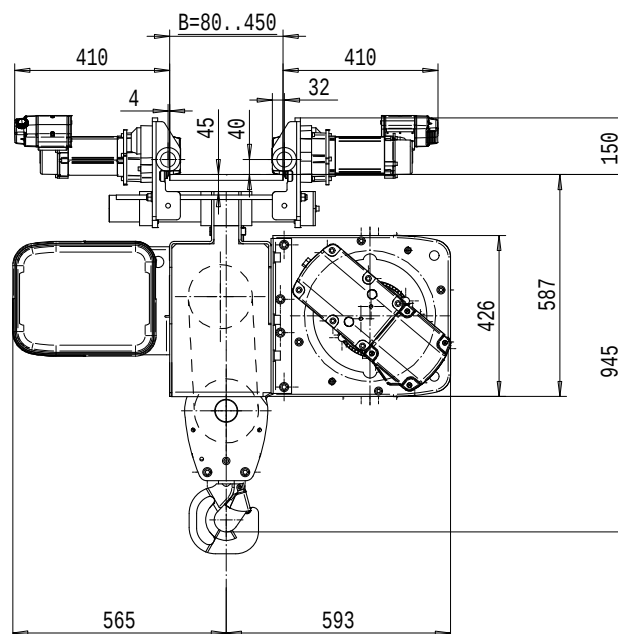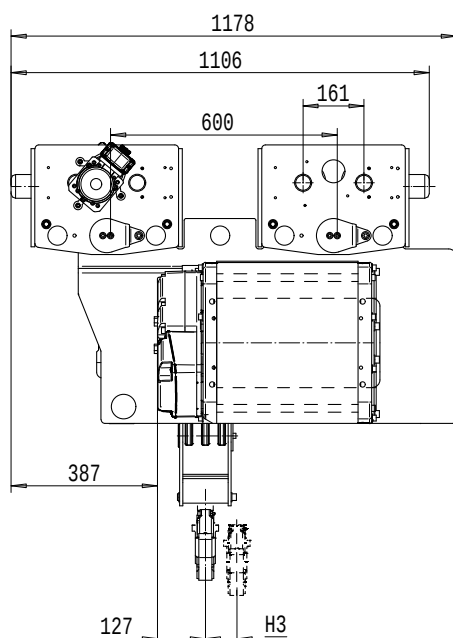

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)	
		Gear+Motor code:	
		F+P3	H+P4
6000	3m/M6	3,2/0,5	5/0,8
7500	2m/M5	3,2/0,5	5/0,8
+ weight (kg):		-	40

HOL (m)	Length code	M2 (mm)	H3 (mm)	Weight (kg)
6	C	567	49	540
8	D	667	65	560
10	E	787	85	585

NOVA




Elektroseilzug
Electric wire rope hoist

TROLLEY; NORMAL HEADROOM, 8 ROPE FALLS

Hoist type:
NC08N...

SWF
KRANTECHNIK

SI-50Hz

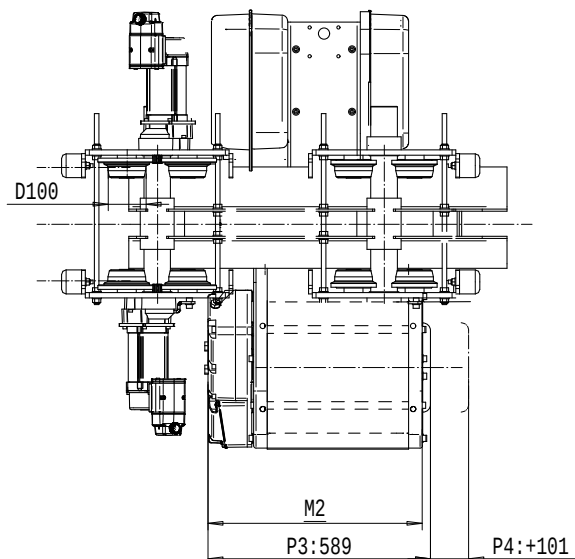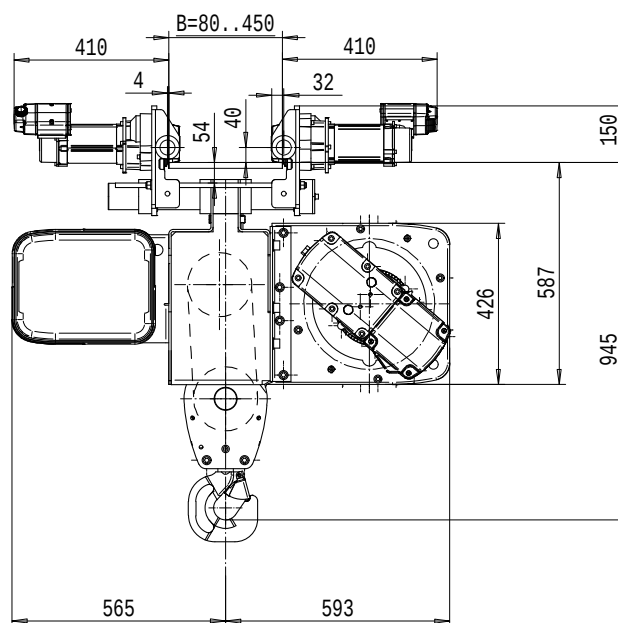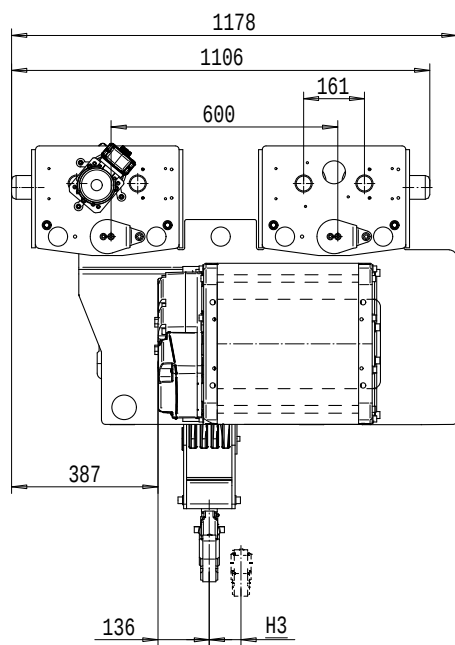

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)	
		Gear+Motor code:	
		F+P3	H+P4
8000	2m/M5	2,5/0,4	4/0,7
10000	1Am/M4	2,5/0,4	4/0,7
+ weight (kg):		-	40

HOL (m)	Length code	M2 (mm)	H3 (mm)	Weight (kg)
4,5	C	567	37	545
6	D	667	49	565
7,5	E	787	64	590

NOVA


Elektroseilzug
Electric wire rope hoist

TROLLEY: DOUBLE GIRDER, HIGH, 2 ROPE FALLS

Hoist typé:
NC02H...

SWF
KRANTECHNIK

SI-50Hz

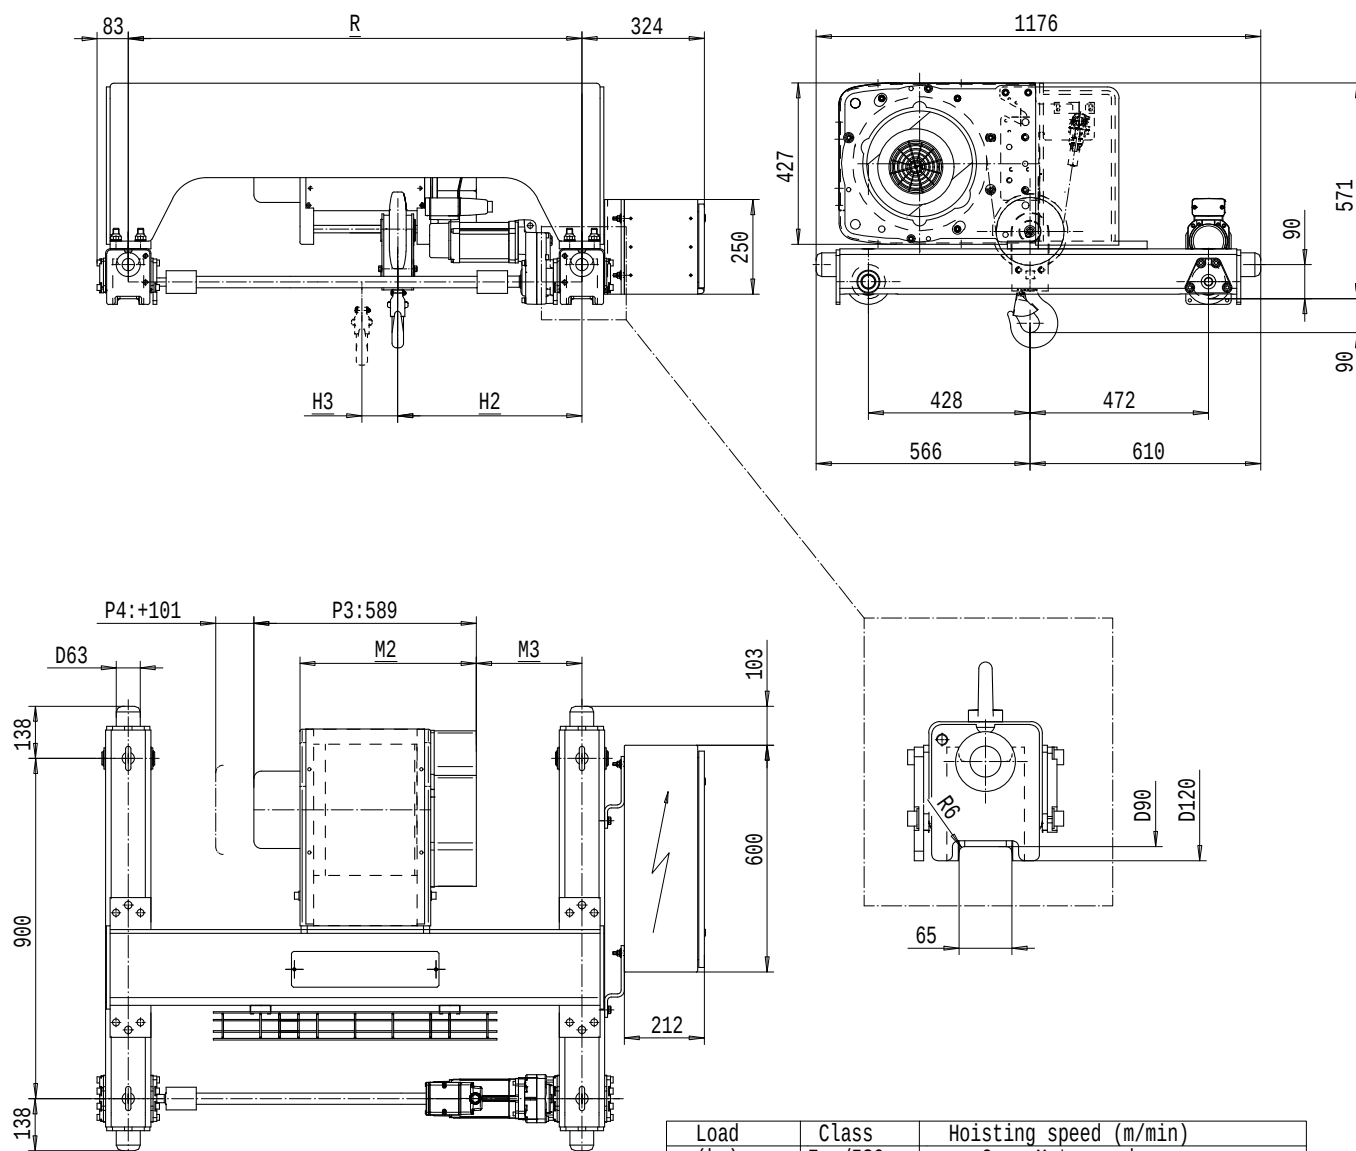

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		E+P3	F+P3	H+P4
2000	3m/M6	8/1,3	10/1,7	16/2,7
2500	2m/M5	8/1,3	10/1,7	16/2,7
3200	1Am/M4	8/1,3	-	-
+ weight (kg):		-	-	20

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	min R (mm)	Weight (kg)
12	B	467	130	337	95	900	321
18	C	567	130	337	144	900	331
24	D	667	102	309	193	900	346
30	E	787	252	459	252	1200	367

Note:


Min R with service platform and second brake

Standard rail gauges: 900, 1200, 1400, 1700, 2000

TROLLEY: DOUBLE GIRDER, HIGH, 4 ROPE FALLS

Hoist type:
NC04H...

SI-50Hz

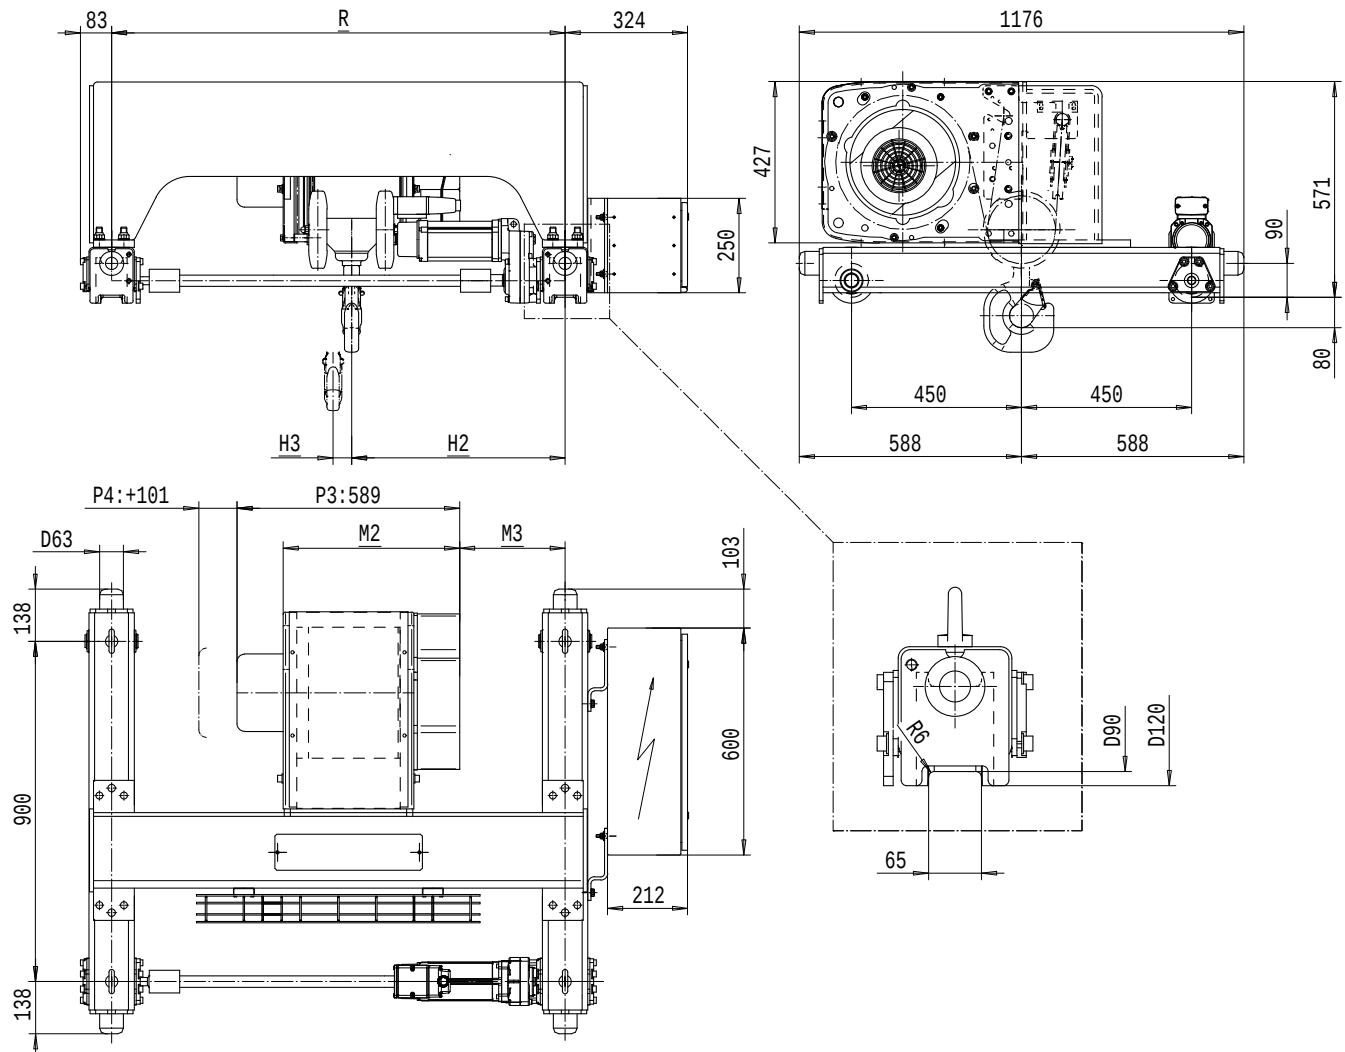

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		E+P3	F+P3	H+P4
4000	3m/M6	4/0,7	5/0,8	8/1,3
5000	2m/M5	4/0,7	5/0,8	8/1,3
6300	1Am/M4	4/0,7	-	-
+ weight (kg):		-	-	20

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	min R (mm)	Weight (kg)
6	B	467	130	415	49	900	325
9	C	567	130	415	74	900	335
12	D	667	102	387	99	900	355
15	E	787	252	537	129	1200	375

Note:

Min R with service platform and second brake

Standard rail gauges: 900, 1200, 1400, 1700, 2000

NOVA Elektroseilzug


Electric wire rope hoist

TROLLEY; DOUBLE GIRDER, HIGH, 6 ROPE FALLS

Hoist type:
NC06H...

SWF
KRANTECHNIK

SI-50Hz

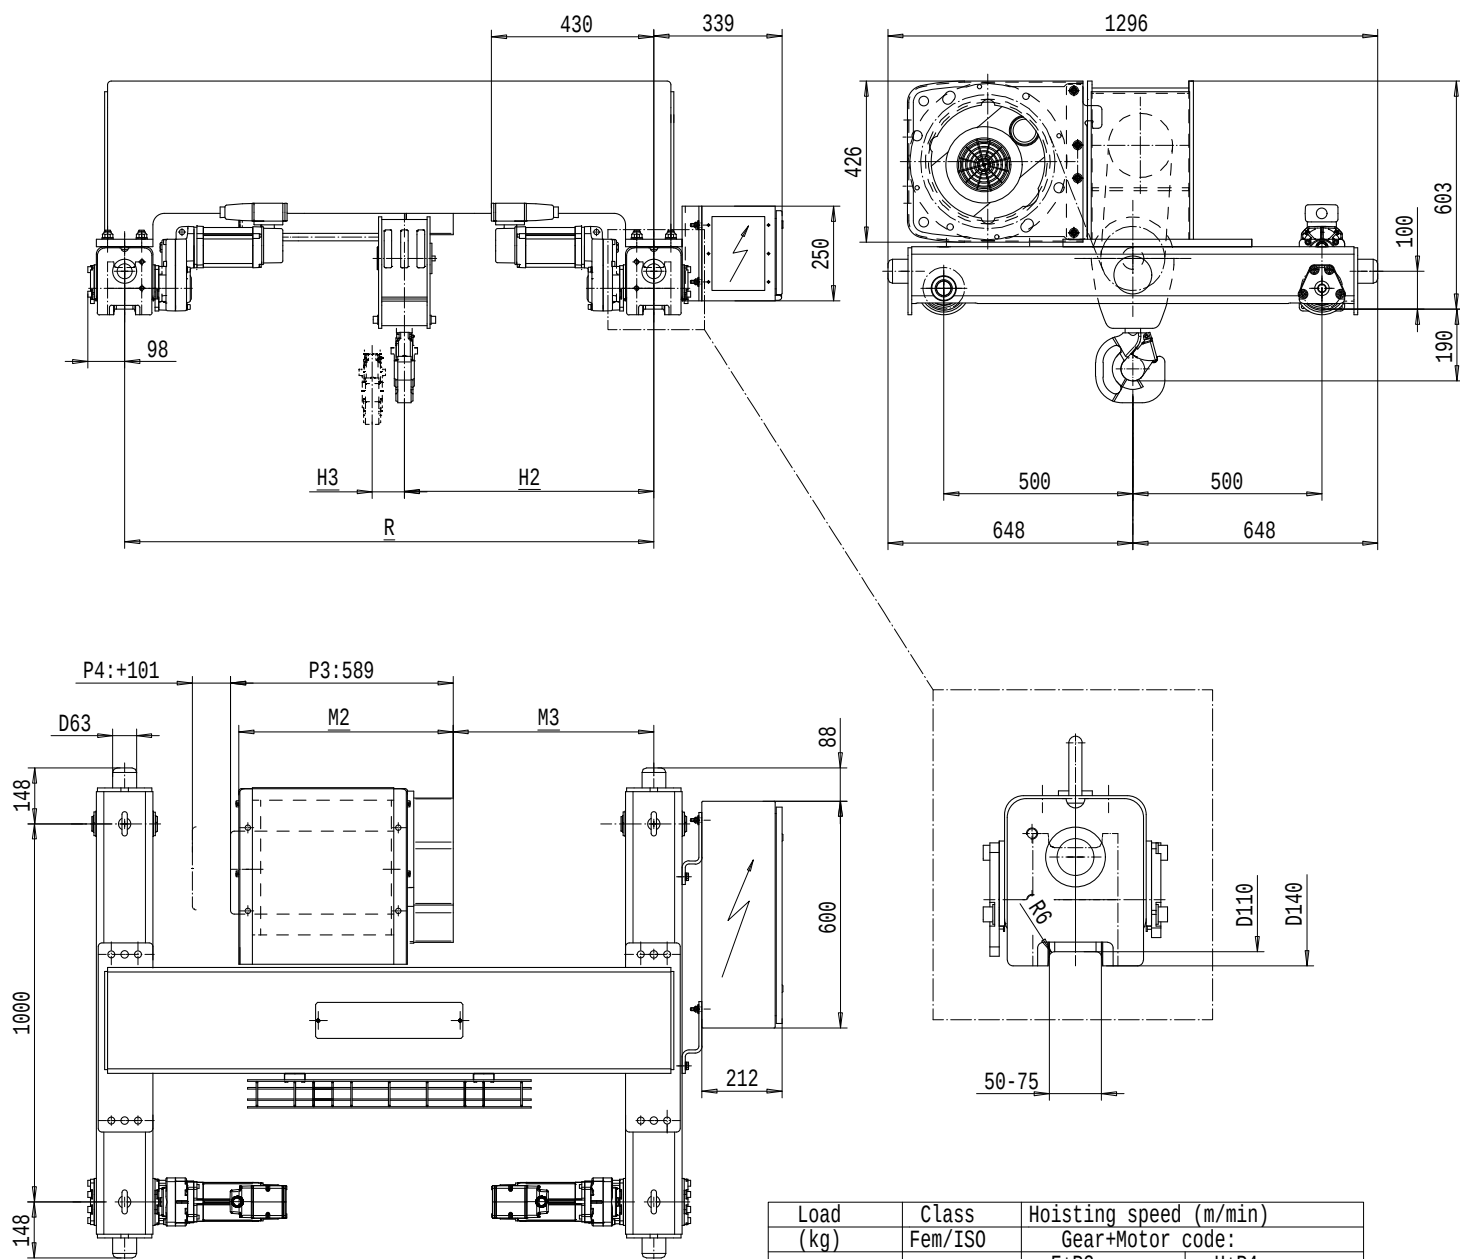

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)	
		Gear+Motor code:	
		F+P3	H+P4
6000	3m/M6	3,2/0,5	5/0,8
7500	2m/M5	3,2/0,5	5/0,8
+ weight (kg):		-	20

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	min R (mm)	Weight (kg)
6	C	567	431	560	49	1200	555
8	D	667	431	560	65	1200	565
10	E	787	531	660	85	1400	595

Note:

Min R with service platform and second brake


Standard rail gauges: 1200, 1400, 1700 and 2000

TROLLEY; DOUBLE GIRDER, HIGH, 8 ROPE FALLS

Hoist type:

NC08H...

SI-50Hz

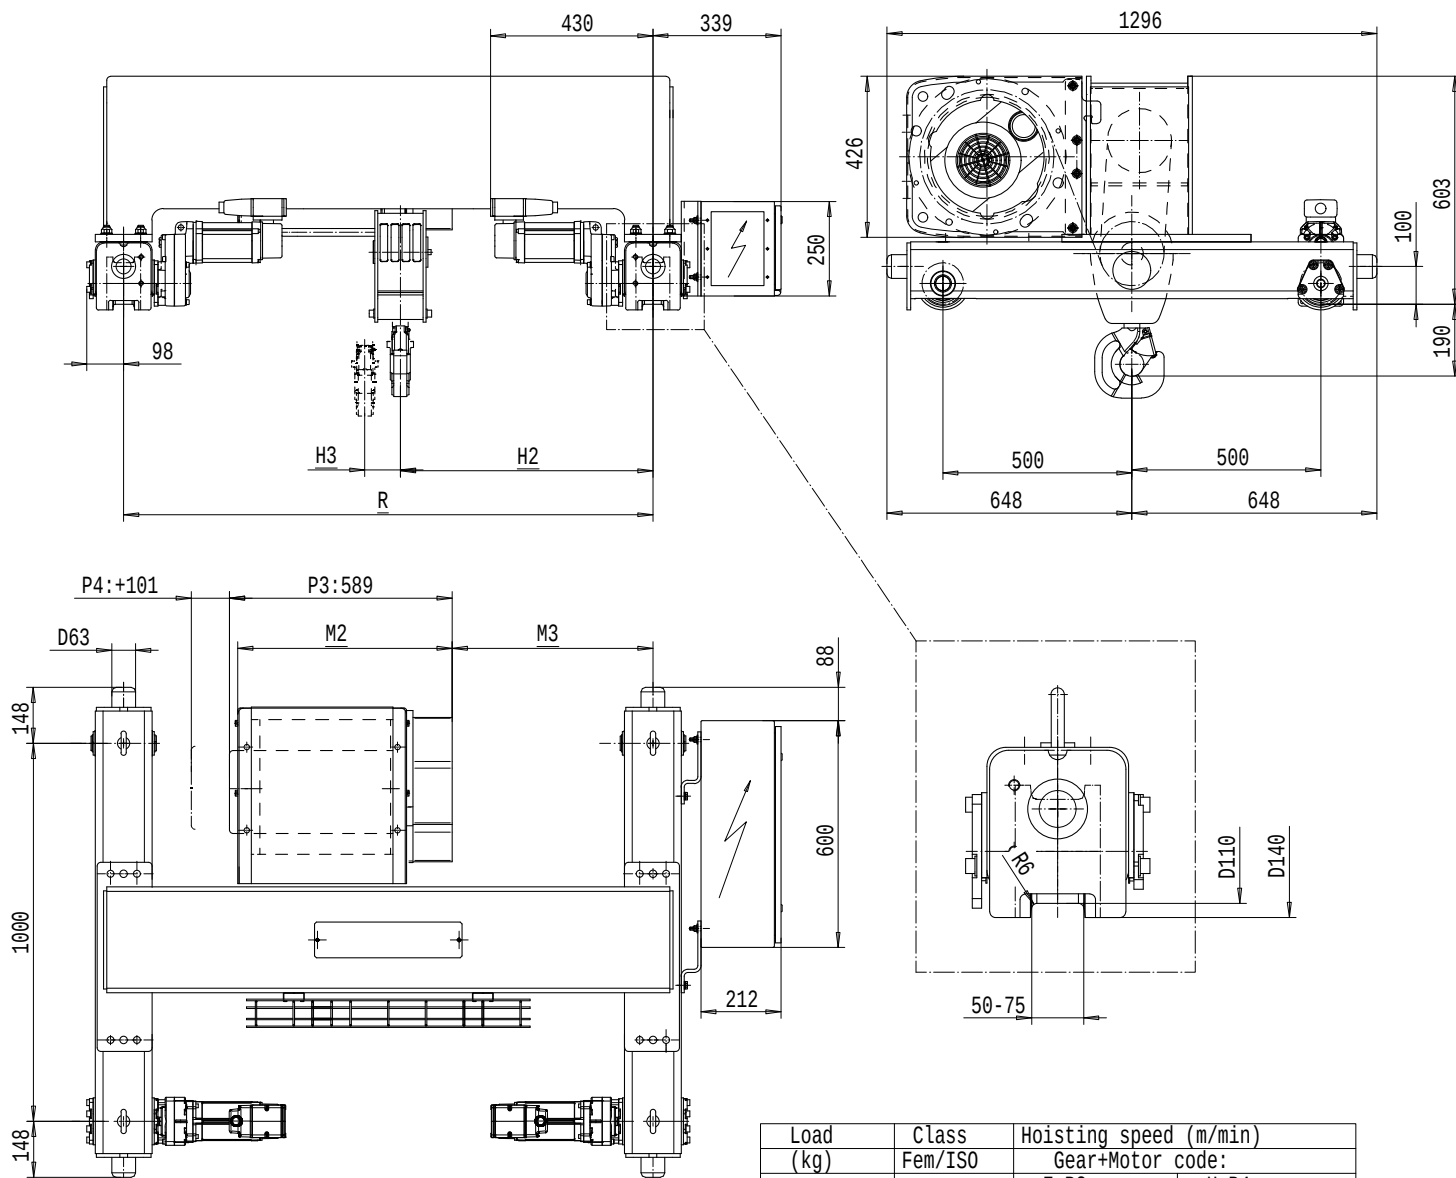


Load (kg)	Class Fem/ISO	Hoisting speed (m/min) Gear+Motor code:	
		F+P3	H+P4
8000	2m/M5	2,5/0,4	4/0,7
10000	1Am/M4	2,5/0,4	4/0,7
+ weight (kg):		-	20

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	min R (mm)	Weight (kg)
4.5	C	567	431	568	37	1200	680
6	D	667	431	568	49	1200	695
7.5	E	787	531	668	64	1400	735

Note:

Min R with service platform and second brake

Standard rail gauges: 1200, 1400, 1700 and 2000

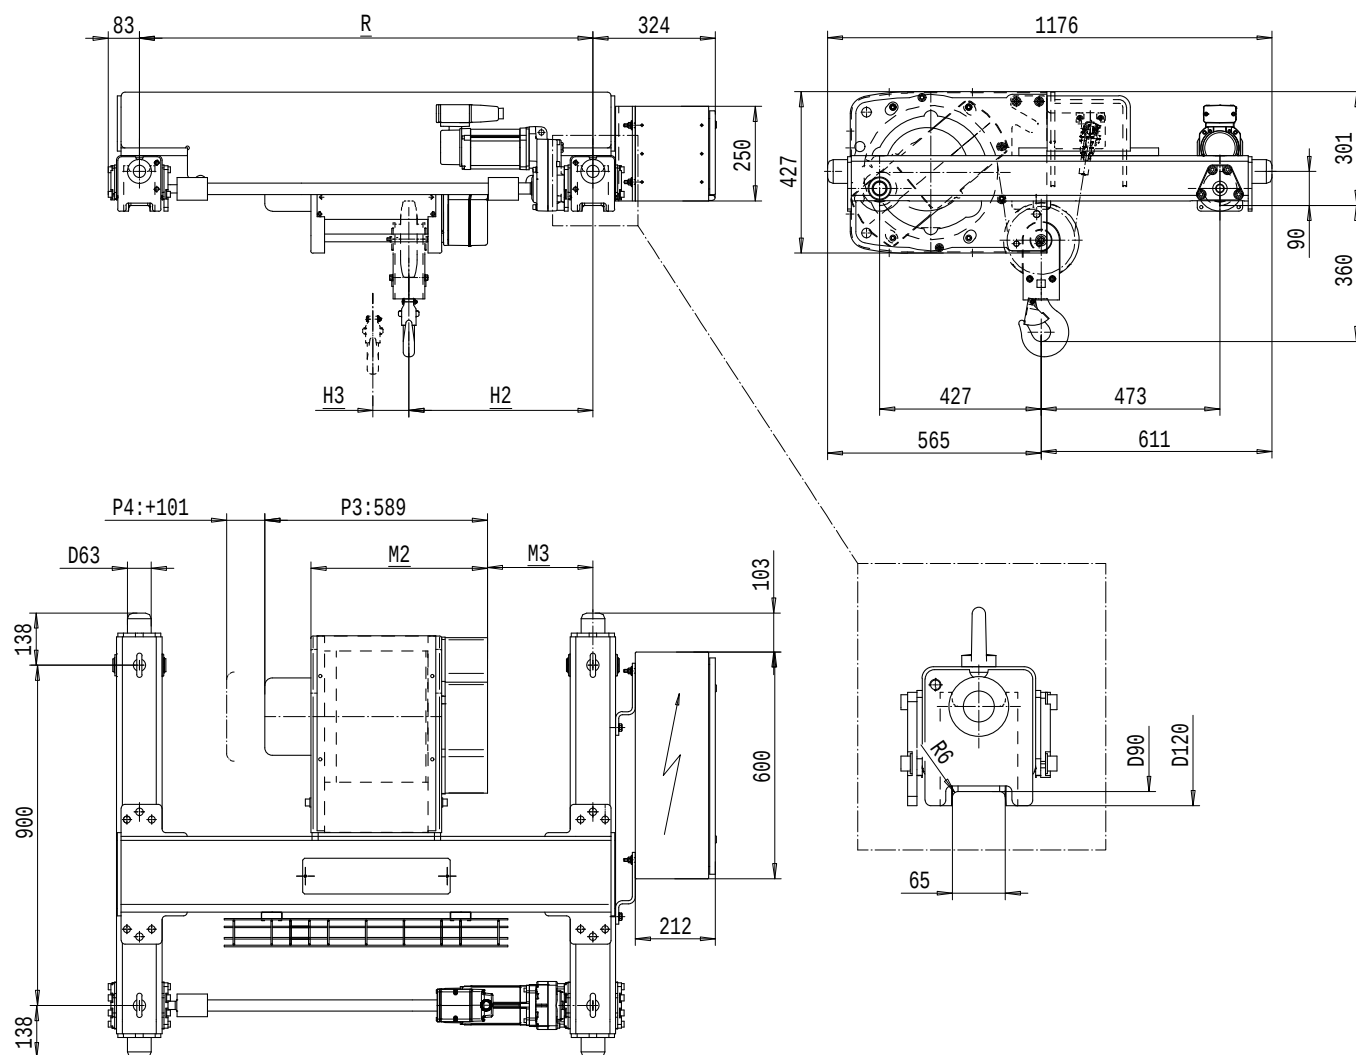

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		E+P3	F+P3	H+P4
2000	3m/M6	8/1,3	10/1,7	16/2,7
2500	2m/M5	8/1,3	10/1,7	16/2,7
3200	1Am/M4	8/1,3	-	-
+ weight (kg):		-	-	20

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	min R (mm)	Weight (kg)
12	B	467	280	487	95	1200	310
18	C	567	280	487	144	1200	320
24	D	667	352	559	193	1400	335
30	E	787	352	559	252	1400	350

Note:

Min R with service platform and second brake



Standard rail gauges: 1200, 1400, 1700 and 2000

TROLLEY; DOUBLE GIRDER, MEDIUM, 4 ROPE FALLS

Hoist type:

NC04M...

SI-50Hz

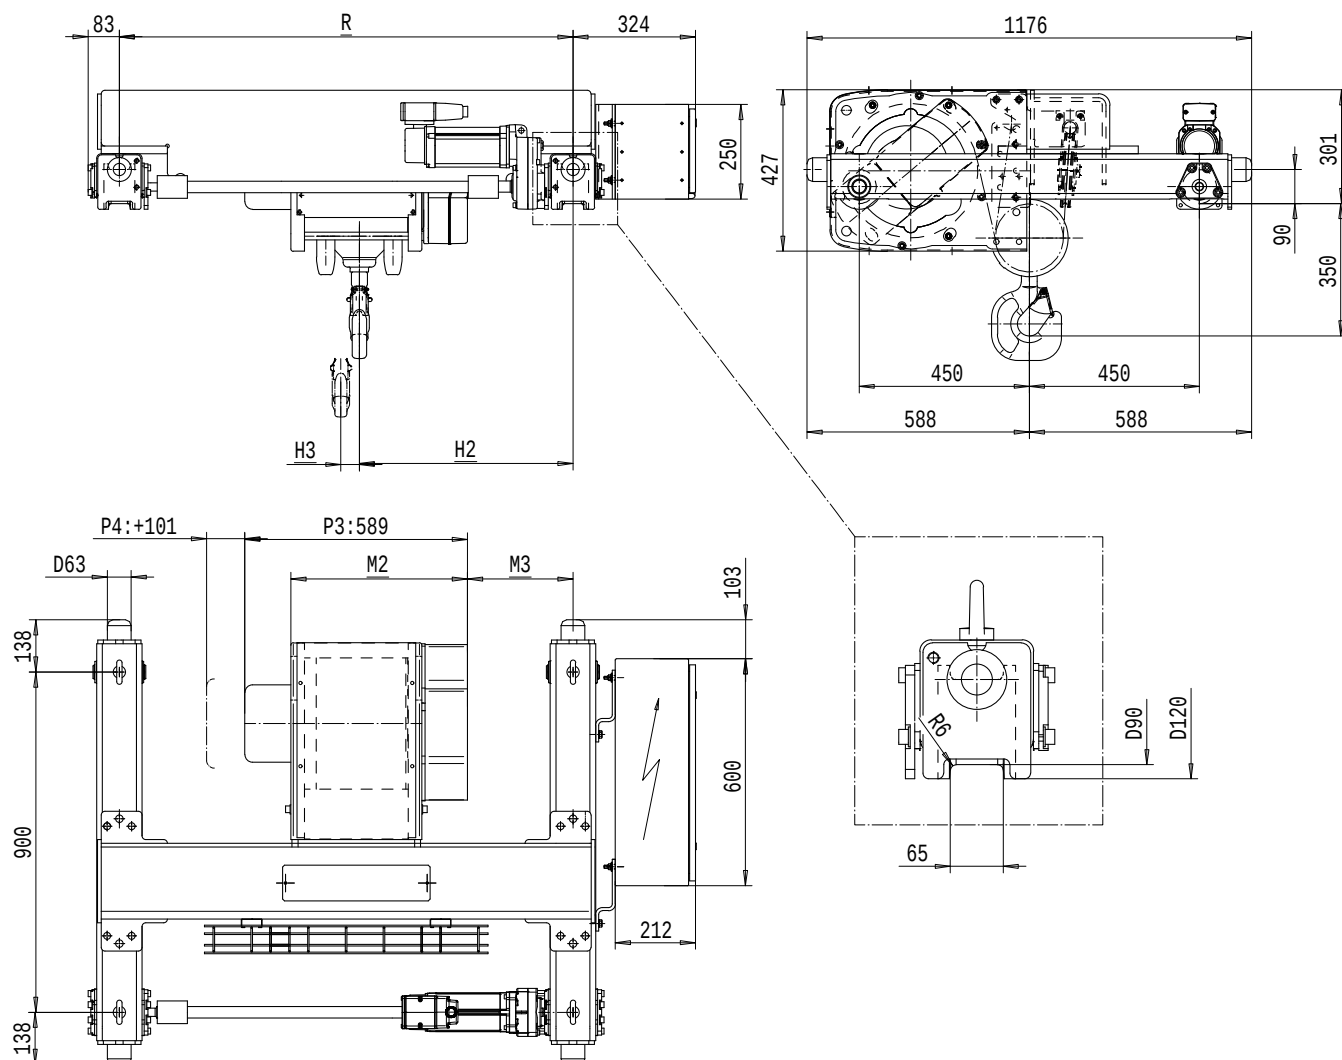

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		E+P3	F+P3	H+P4
4000	3m/M6	4/0,7	5/0,8	8/1,3
5000	2m/M5	4/0,7	5/0,8	8/1,3
6300	1Am/M4	4/0,7	-	-
+ weight (kg):		-	-	20

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	min R (mm)	Weight (kg)
6	B	467	280	565	49	1200	315
9	C	567	280	565	74	1200	325
12	D	667	352	637	99	1400	340
15	E	787	352	637	129	1400	360

Note:

Min R with service platform and second brake

Standard rail gauges: 1200, 1400, 1700 and 2000

NOVA Elektroseilzug


Electric wire rope hoist

TROLLEY; DOUBLE GIRDER, MEDIUM, 6 ROPE FALLS

Hoist type:
NC06M...

SWF
KRANTECHNIK

SI-50Hz

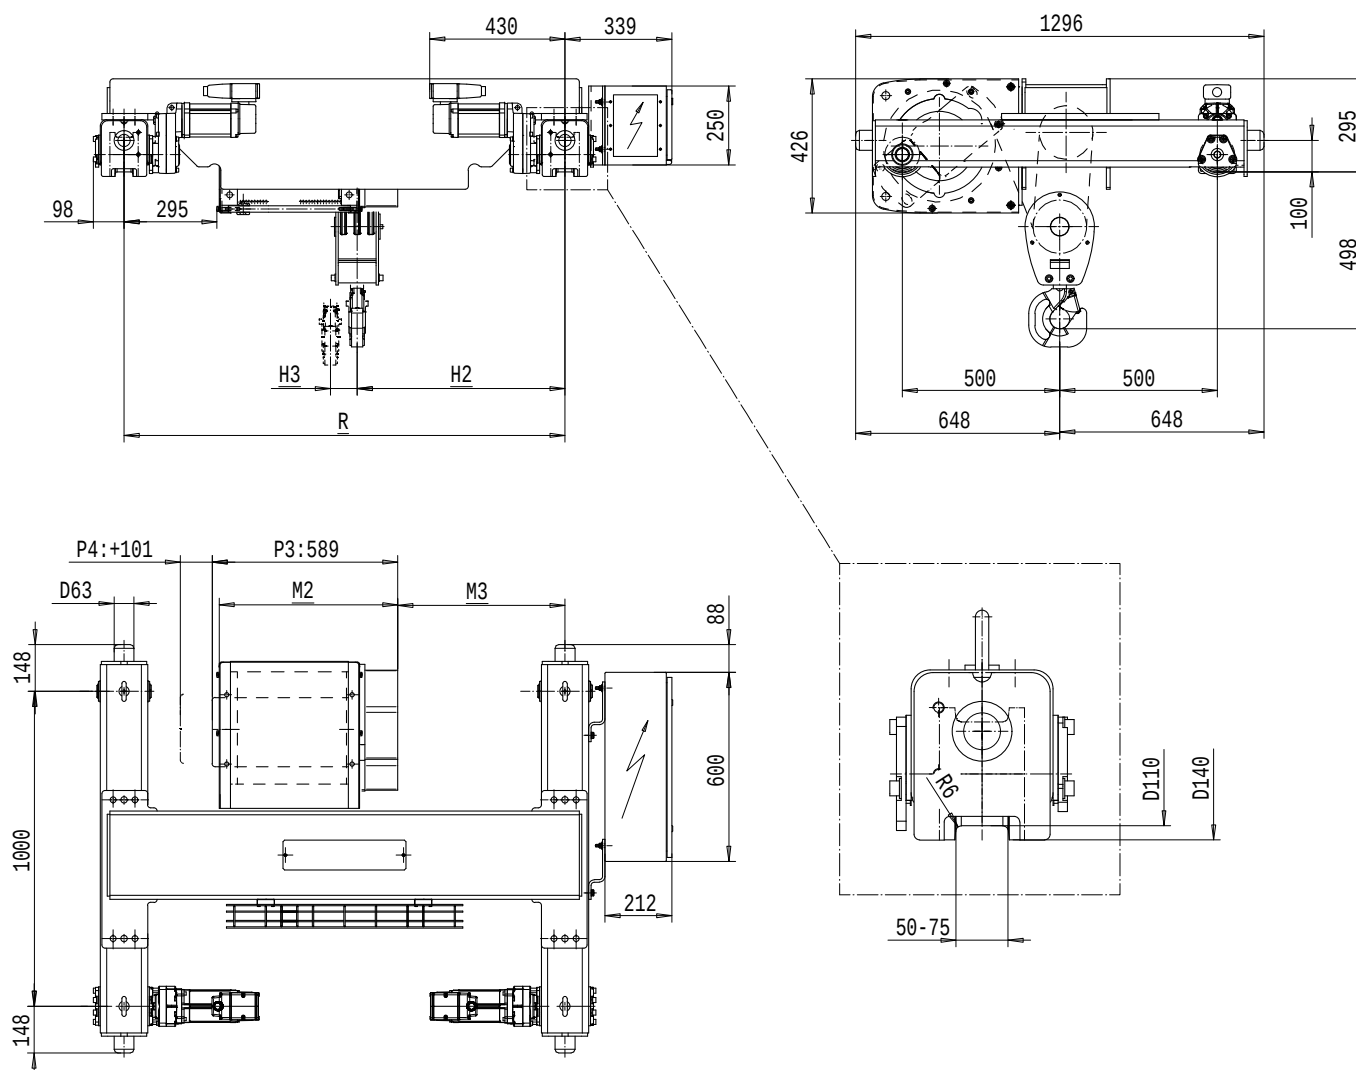

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)	
		Gear+Motor code:	
		F+P3	H+P4
6000	3m/M6	3, 2/0,5	5/0,8
7500	2m/M5	3, 2/0,5	5/0,8
+ weight (kg):		-	20

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	min R (mm)	Weight (kg)
6	C	567	531	660	49	1400	530
8	D	667	681	810	65	1700	570
10	E	787	831	960	85	2000	600

Note:

Min R with service platform and second brake


Standard rail gauges: 1400, 1700 and 2000

TROLLEY: DOUBLE GIRDER, MEDIUM, 8 ROPE FALLS

Hoist type:

NC08M...

SI-50Hz

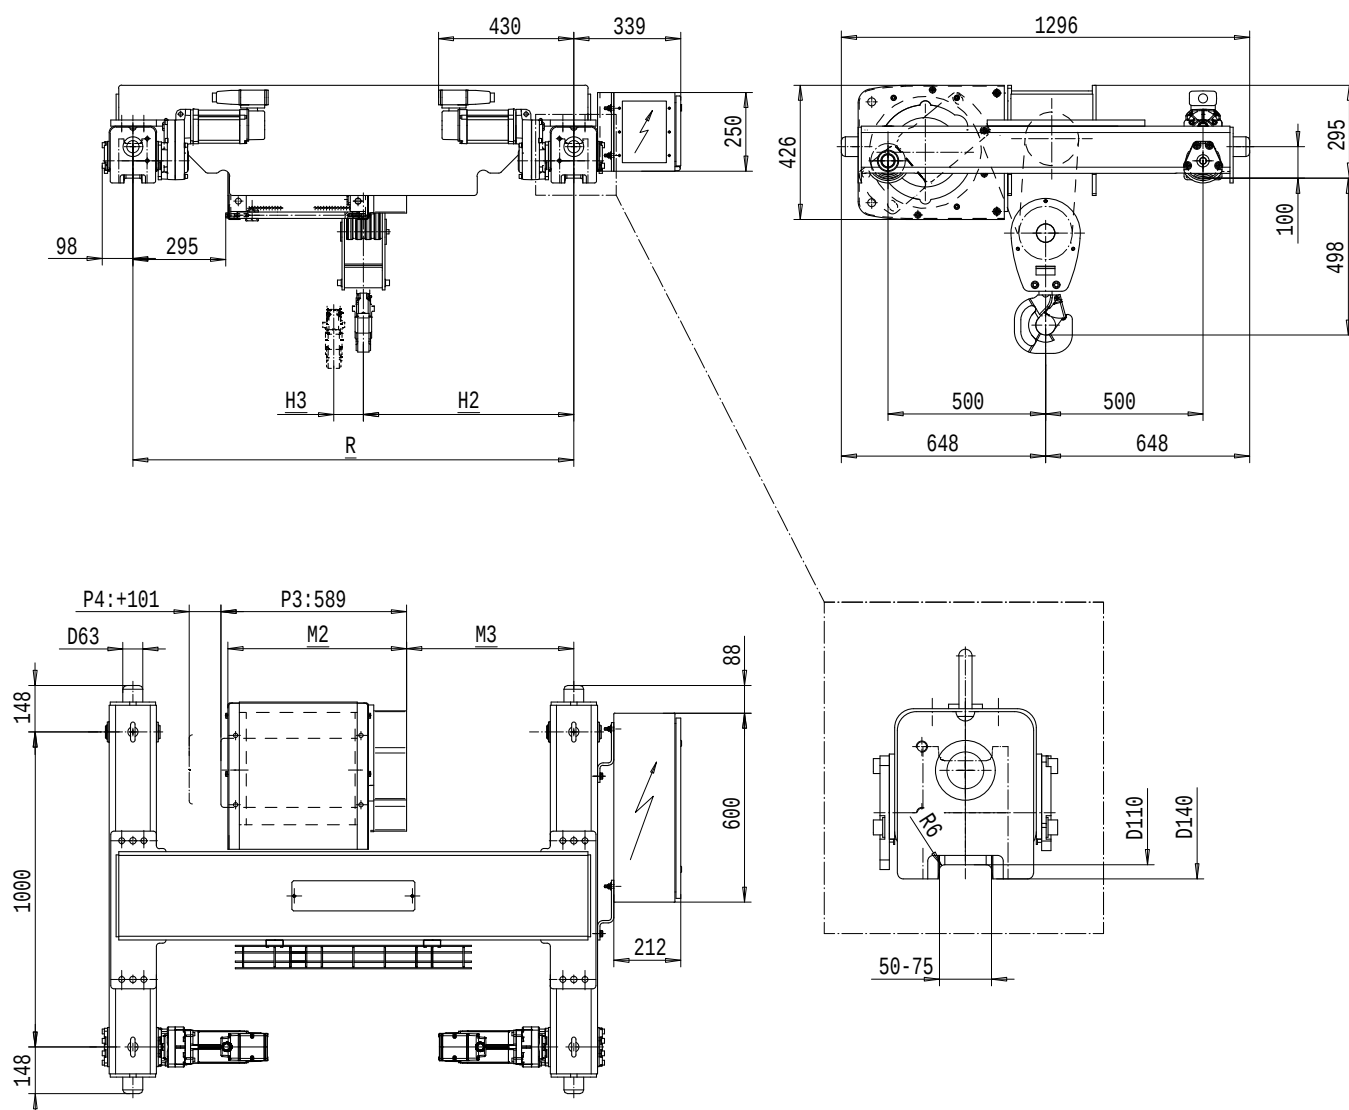

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)	
		Gear+Motor code:	
		F+P3	H+P4
8000	2m/M5	2,5/0,4	4/0,7
10000	1Am/M4	2,5/0,4	4/0,7
+ weight (kg):		-	20

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	min R (mm)	Weight (kg)
4.5	C	567	531	668	37	1400	655
6	D	667	681	818	49	1700	700
7.5	E	787	831	968	64	2000	740

Note:

Min R with service platform and second brake

Standard rail gauges: 1400, 1700 and 2000

NOVA



Elektroseilzug
Electric wire rope hoist

HOIST; MACHINERY HOIST, 1 ROPE FALL

Hoist type:
NCM1V...


SWF
KRANTECHNIK

SI-50Hz

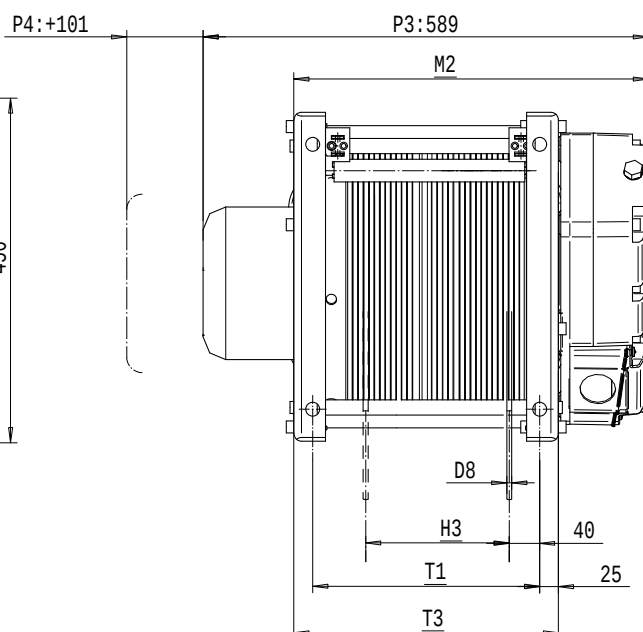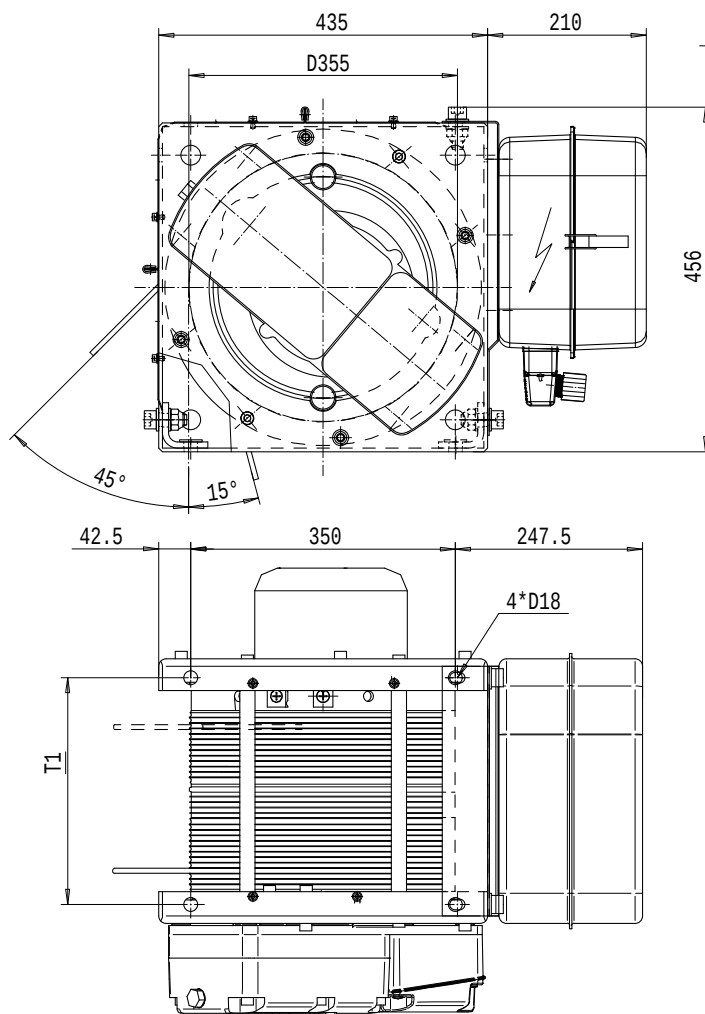

Note!
Max. rope angle from
drum groove +/- 4°

Ropes direction:

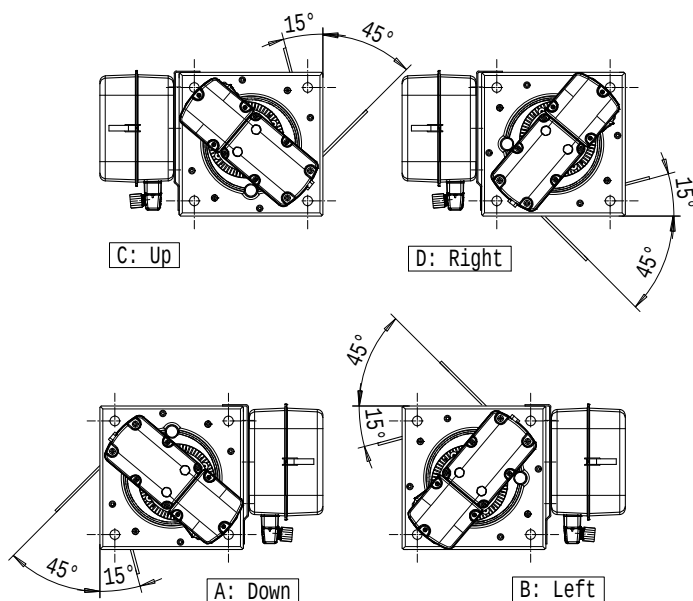



Load (kg)	Class Fem/ISO	Hoisting speed (m/min) Gear+Motor code:		
		E+P3	F+P3	H+P4
1000	3m/M6	16/2,7	20/3,3	32/5,3
1250	2m/M5	16/2,7	20/3,3	32/5,3
1600	1Am/M4	16/2,7	-	-
+ weight (kg):		-	-	20

HOL (m)	Length code	M2 (mm)	H3 (mm)	T1 (mm)	T3 (mm)	Weight (kg)
24	B	467	190	300	350	140
36	C	567	288	400	450	150
48	D	667	388	500	550	160
62	E	787	508	620	670	170



Drum groove var. 1

Hoist type:
NCM2V...

Note!
Rope 1 closer
to the gearbox

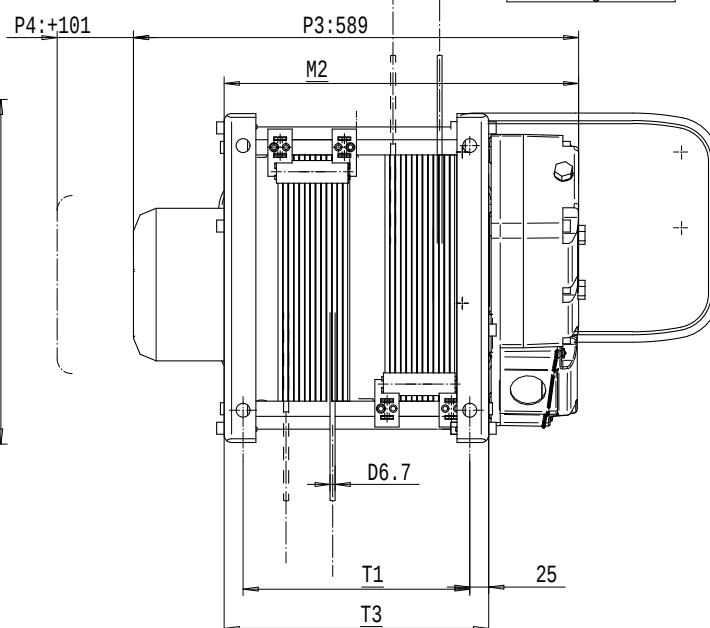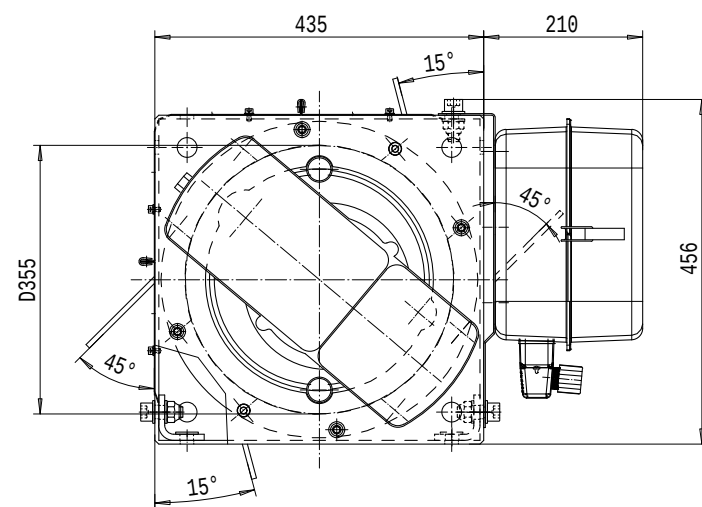


Note!
Max. rope angle from
drum groove $\pm 4^\circ$

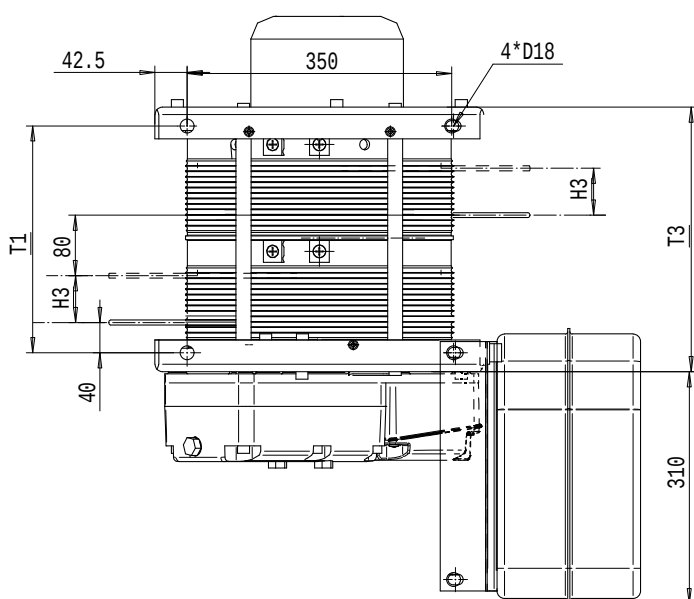

Optional and transport
position of the cubicle

Ropes direction:


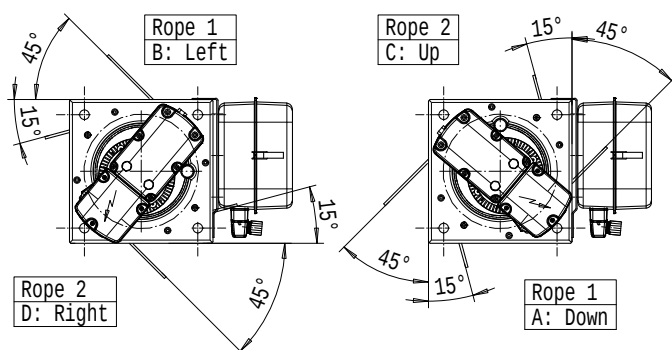


Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		E+P3	F+P3	H+P4
1000	3m/M6	16/2,7	20/3,3	32/5,3
1250	2m/M5	16/2,7	20/3,3	32/5,3
1600	1Am/M4	16/2,7	-	-
+ weight (kg):		-	-	20

HOL (m)	Length code	M2 (mm)	H3 (mm)	T1 (mm)	T3 (mm)	Weight (kg)
9,5	B	467	62	300	350	140
17	C	567	112	400	450	150
25	D	667	162	500	550	160
34	E	787	222	620	670	170


Drum groove var. 4

Hoist type:
NCM2V...

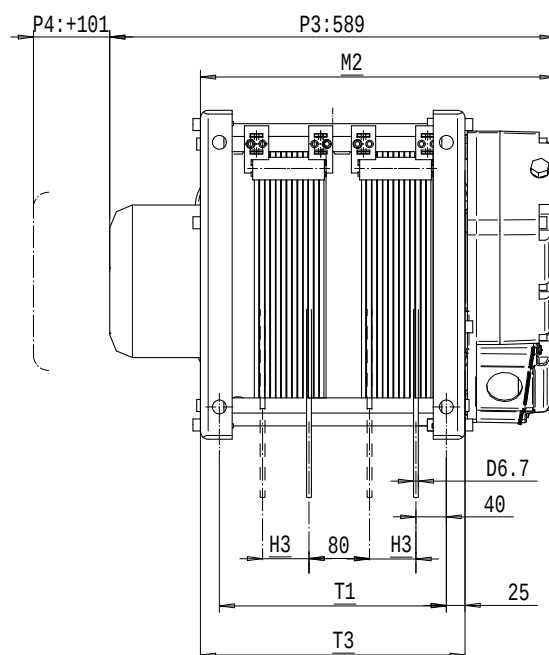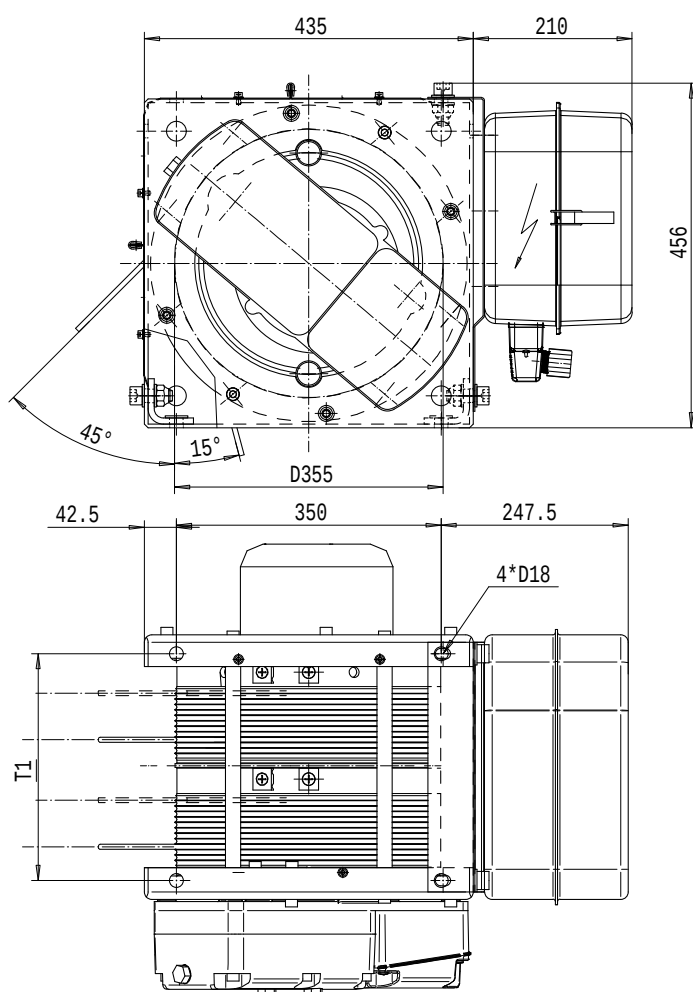

Note!
Max. rope angle from
drum groove +/-4°

Ropes direction:

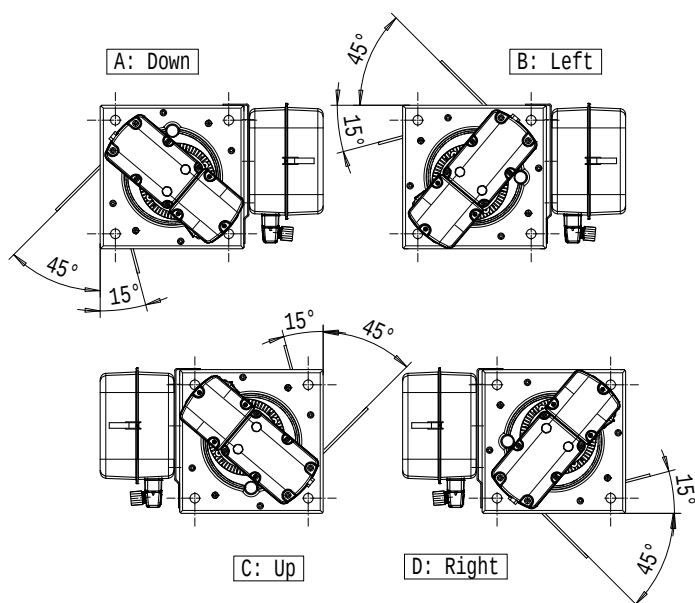

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		E+P3	F+P3	H+P4
1000	3m/M6	16/2,7	20/3,3	32/5,3
1250	2m/M5	16/2,7	20/3,3	32/5,3
1600	1Am/M4	16/2,7	-	-
+ weight (kg):		-	-	20

HOL (m)	Length code	M2 (mm)	H3 (mm)	T1 (mm)	T3 (mm)	Weight (kg)
9.5	B	467	62	300	350	140
17	C	567	112	400	450	150
25	D	667	162	500	550	160
34	E	787	222	620	670	170

Drum groove var. 4