

Dimension Sheets
Electric Wire Rope Hoist NOVA

1. NOVA NB

2. NOVA NC

3. NOVA ND

4. NOVA NE

5. NOVA NF

PROD_REF	HOIST_TYPE	REEVING	DRAWING_NR
NE-F-02	HOIST; FIXED	2 R0PE FALLS	D002141-A
NE-F-04	HOIST; FIXED	4 ROPE FALLS	D002143-A
NE-F-06	HOIST; FIXED	6 ROPE FALLS	D002145-A
NE-F-08	HOIST; FIXED	8 ROPE FALLS	D002148-A
NE-F-22	HOIST; FIXED	2x2 ROPE FALLS	D002152-A
NE-F-24	HOIST; FIXED	2x4 ROPE FALLS	D002155-A
NE-F-26	HOIST; FIXED	2x6 ROPE FALLS	D002157-A
NE-F-28	HOIST; FIXED	2x8 ROPE FALLS	D002159-A
NE-N-02	TROLLEY; NORMAL HEADROOM	2 R0PE FALLS	D002692-A
NE-N-04	TROLLEY; NORMAL HEADROOM	4 ROPE FALLS	D002694-A
NE-N-06	TROLLEY; NORMAL HEADROOM	6 ROPE FALLS	D002711-A
NE-N-08	TROLLEY; NORMAL HEADROOM	8 ROPE FALLS	D002712-A
NE-N-22	TROLLEY; NORMAL HEADROOM	2x2 ROPE FALLS	D002535-A
NE-N-24	TROLLEY; NORMAL HEADROOM	2x4 ROPE FALLS	D002531-A
NE-N-26	TROLLEY; NORMAL HEADROOM	2x6 ROPE FALLS	D002536-A
NE-N-28	TROLLEY; NORMAL HEADROOM	2x8 ROPE FALLS	D002538-A
NE-M-02	TROLLEY; DOUBLE GIRDER	MEDIUM, 2 ROPE FALLS	D002142-A
NE-M-04	TROLLEY; DOUBLE GIRDER	MEDIUM, 4 ROPE FALLS	D002144-A
NE-M-06	TROLLEY; DOUBLE GIRDER	MEDIUM, 6 ROPE FALLS	D002147-A
NE-M-08	TROLLEY; DOUBLE GIRDER	MEDIUM, 8 ROPE FALLS	D002149-A
NE-M-22	TROLLEY; DOUBLE GIRDER	MEDIUM, 2x2 ROPE FALLS	D002153-A
NE-M-24	TROLLEY; DOUBLE GIRDER	MEDIUM, 2x4 ROPE FALLS	D002156-A
NE-M-26	TROLLEY; DOUBLE GIRDER	MEDIUM, 2x6 ROPE FALLS	D002158-A
NE-M-28	TROLLEY; DOUBLE GIRDER	MEDIUM, 2x8 ROPE FALLS	D002160-A
NE-V-M1	HOIST; MACHINERY HOIST	1 ROPE FALLS	D002433-A
NE-V-M2	HOIST; MACHINERY HOIST	2 ROPE FALLS	D002411-A

NOVA


Elektroseilzug
Electric wire rope hoist

HOIST; FIXED, 2 ROPE FALLS

Hoist type:
NE02F...

SWF
KRANTECHNIK

SI-50Hz

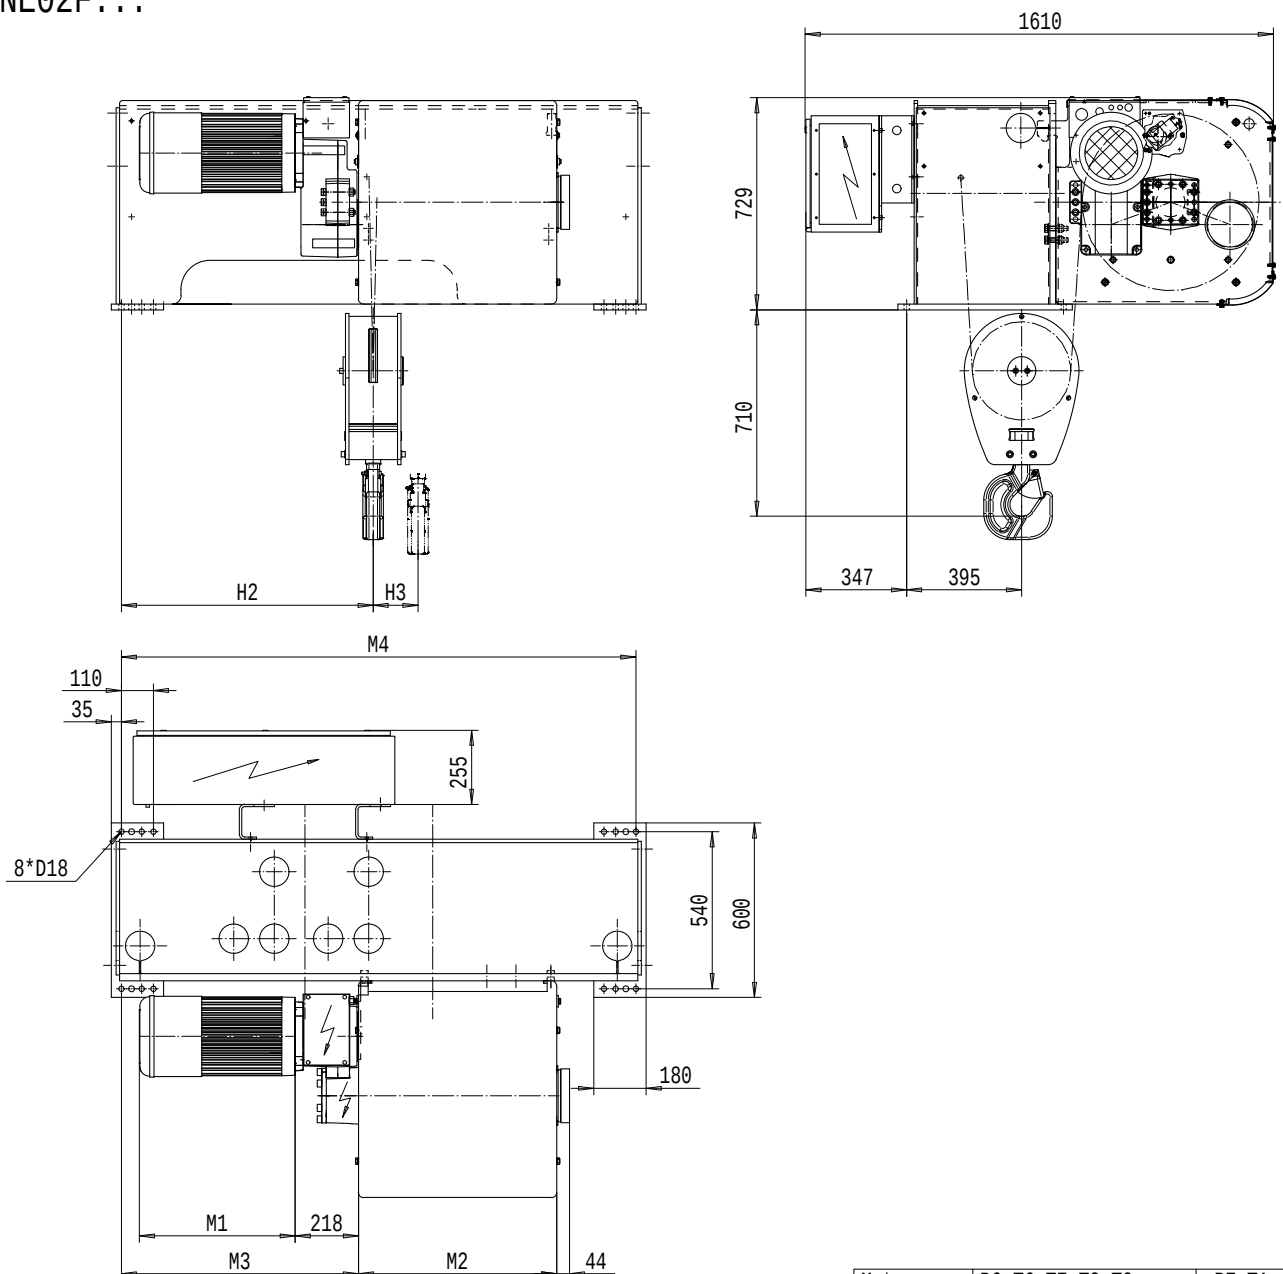

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL (m)	Length code	M2 (mm)	M3 (mm)	M4 (mm)	H2 (mm)	H3 (mm)	Weight (kg)
15,5	C	462	815	1770	871	139	1300
21	D	562	815	1770	871	188	1325
28	E	682	815	1770	871	251	1375
36	F	832	475	1770	534	322	1425
47	G	1022	475	1770	534	421	1525
61	H	1272	469	2580	528	546	1800
80,5	J	1622	469	2580	528	721	1900
97	K	1922	469	2580	528	868	2000

Load (kg)	Class	Hoisting motor					
	Fem/ISO	Hoisting speed (m/min): Gear code					
	8/1,3: E	10/1,7: F	12,5/2: G	16: H	20: J		
6300	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9	
8000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9	
10000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA	

NOVA


Elektroseilzug
Electric wire rope hoist

HOIST; FIXED, 4 ROPE FALLS

Hoist type:
NE04F...

SWF
KRANTECHNIK

SI-50Hz

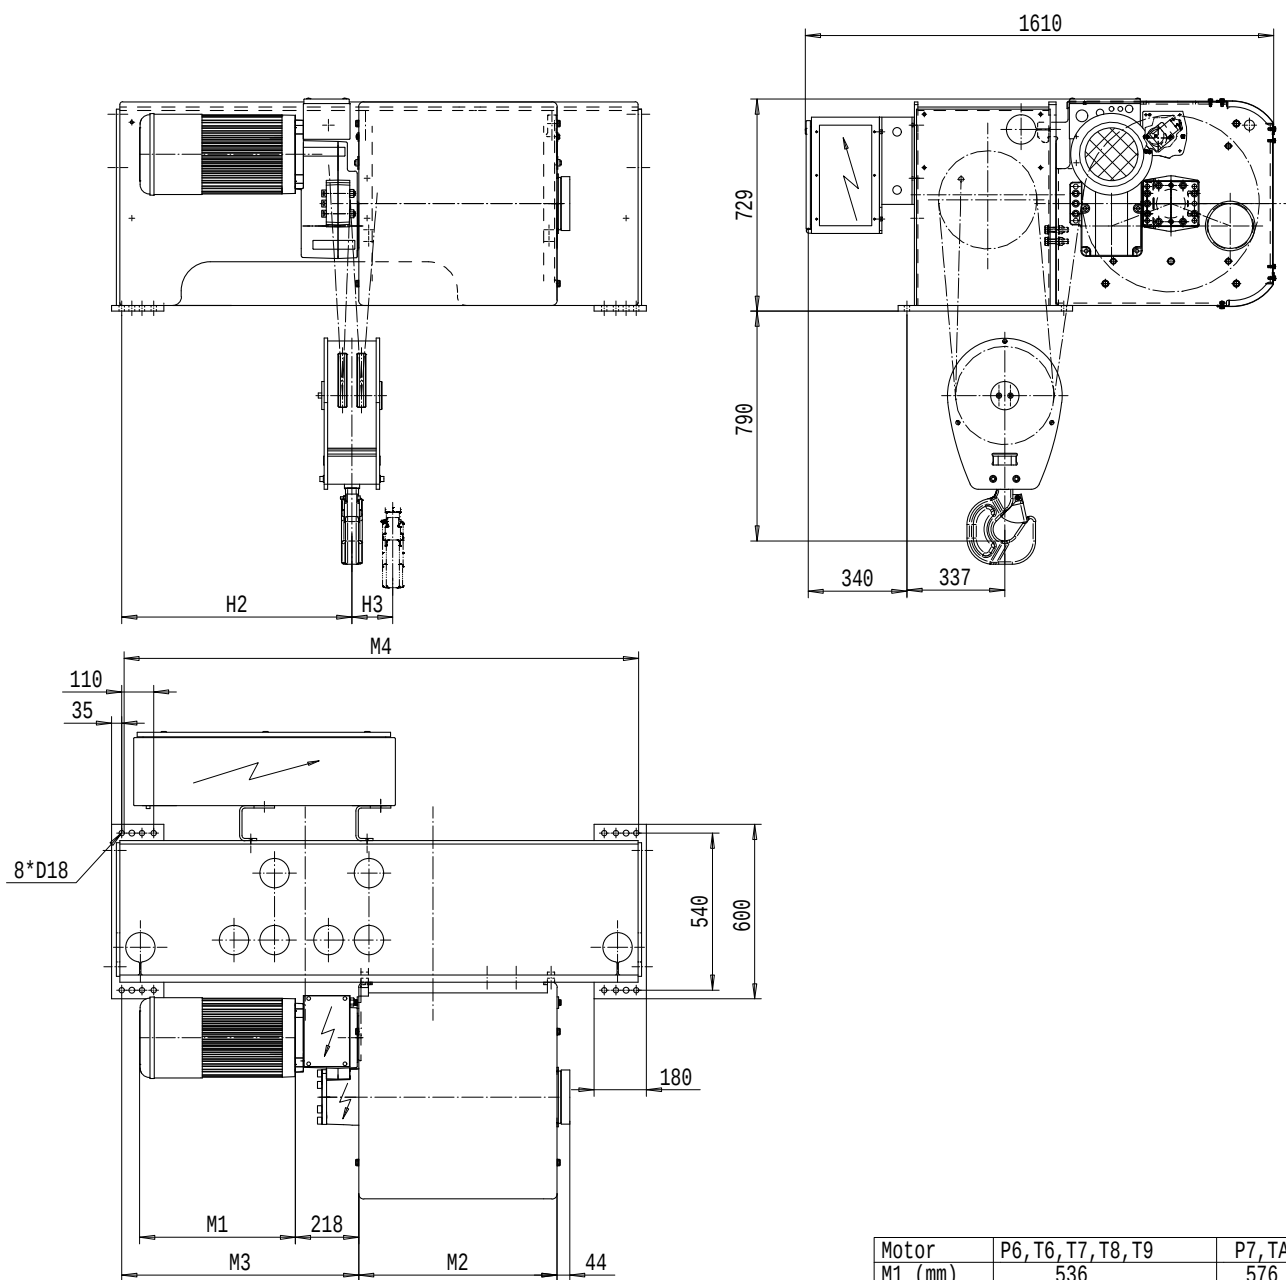

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

H0L (m)	Length code	M2 (mm)	M3 (mm)	M4 (mm)	H2 (mm)	H3 (mm)	Weight (kg)
7,5	C	462	815	1770	808	69	1400
10,5	D	562	815	1770	808	94	1425
14	E	682	815	1770	808	125	1475
18	F	832	475	1770	471	161	1525
23,5	G	1022	475	1770	471	210	1625
30,5	H	1272	469	2580	465	273	1900
40	J	1622	469	2580	465	360	2000
48,5	K	1922	469	2580	465	434	2100

Load (kg)	Class Fem/ISO	Hoisting motor					
		Hoisting speed (m/min): Gear code					
		4/0,7: E	5/0,8: F	6,3/1,1: G	8: H	10: J	
12500	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9	
16000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9	
20000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA	

NOVA


Elektroseilzug
Electric wire rope hoist

HOIST; FIXED, 6 ROPE FALLS

Hoist type:
NE06F...

SWF
KRANTECHNIK

SI - 50Hz

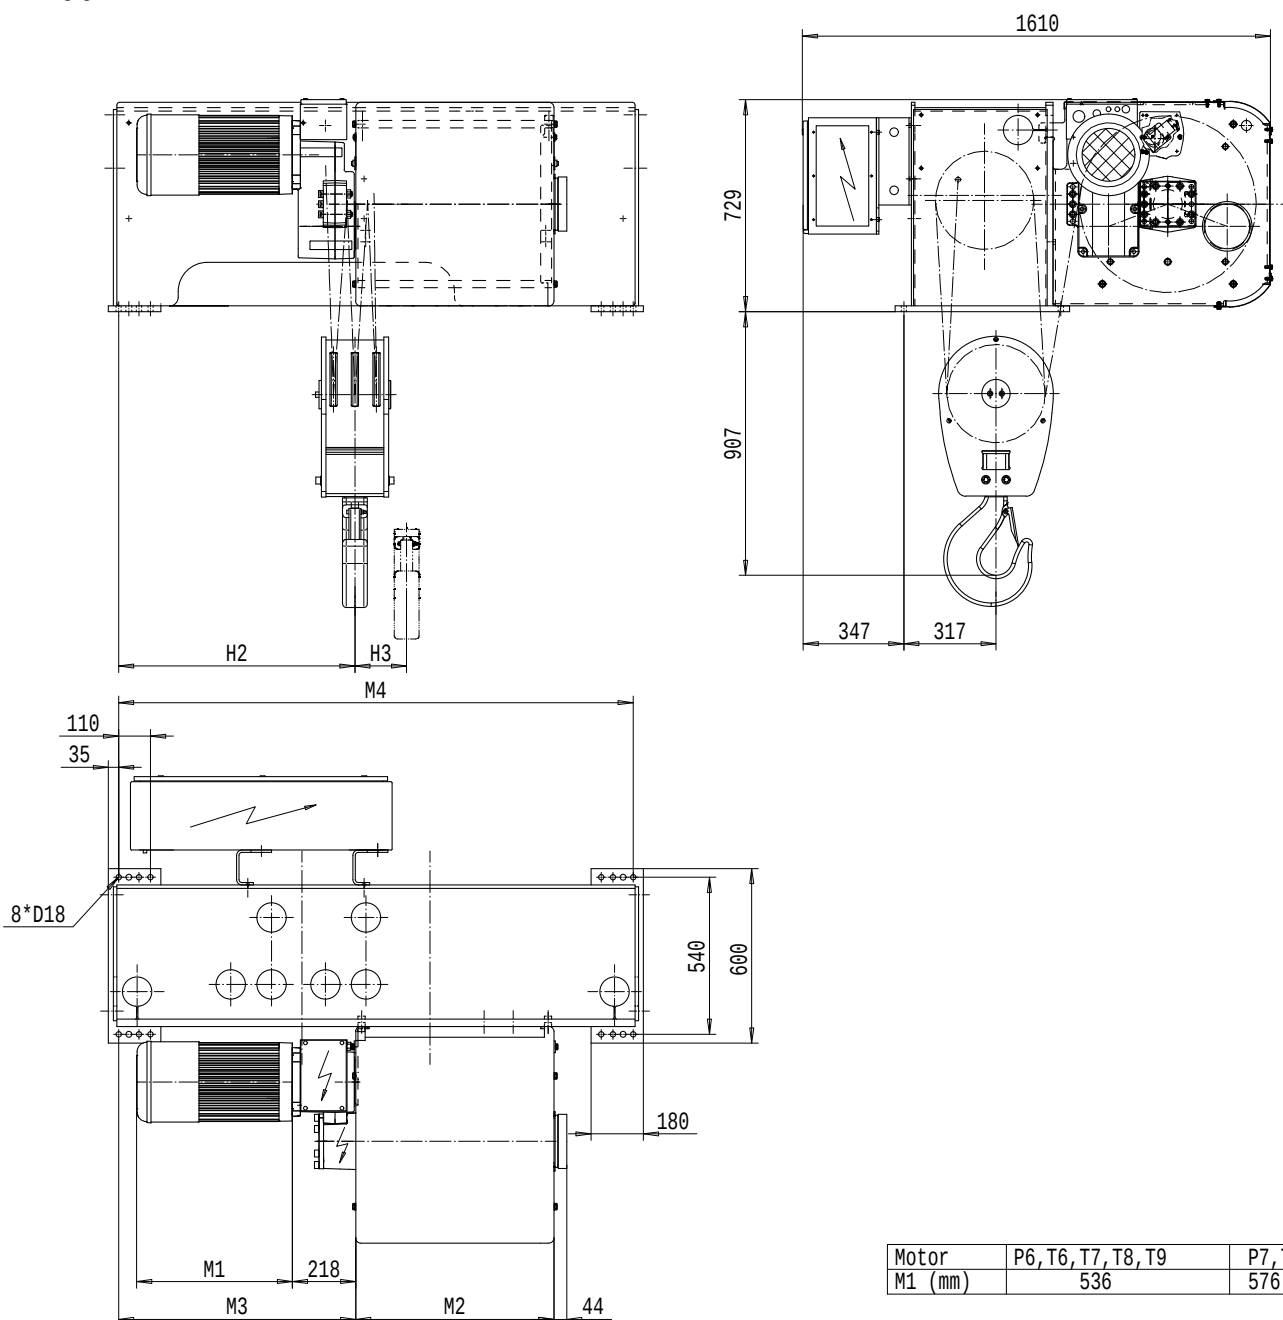

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL	Length	M2	M3	M4	H2	H3	Weight
(m)	code	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
5	C	462	815	1770	824	46	1450
7	D	562	815	1770	824	63	1475
9	E	682	815	1770	824	84	1525
12	F	832	475	1770	487	107	1575
15,5	G	1022	475	1770	487	140	1675
20	H	1272	469	2580	481	182	1950
26,5	J	1622	469	2580	481	240	2050
32	K	1922	469	2580	481	289	2150

Load	Class	Hoisting motor				
(kg)	Fem/ISO	Hoisting speed (m/min): Gear code				
		2,5/0,4: E	3,2/0,5: F	4/0,7: G	5: H	6,3: J
20000	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9
25000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9
30000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA

NOVA


Elektroseilzug
Electric wire rope hoist

HOIST; FIXED, 8 ROPE FALLS

Hoist type:
NE08F...

SWF
KRANTECHNIK

SI-50Hz

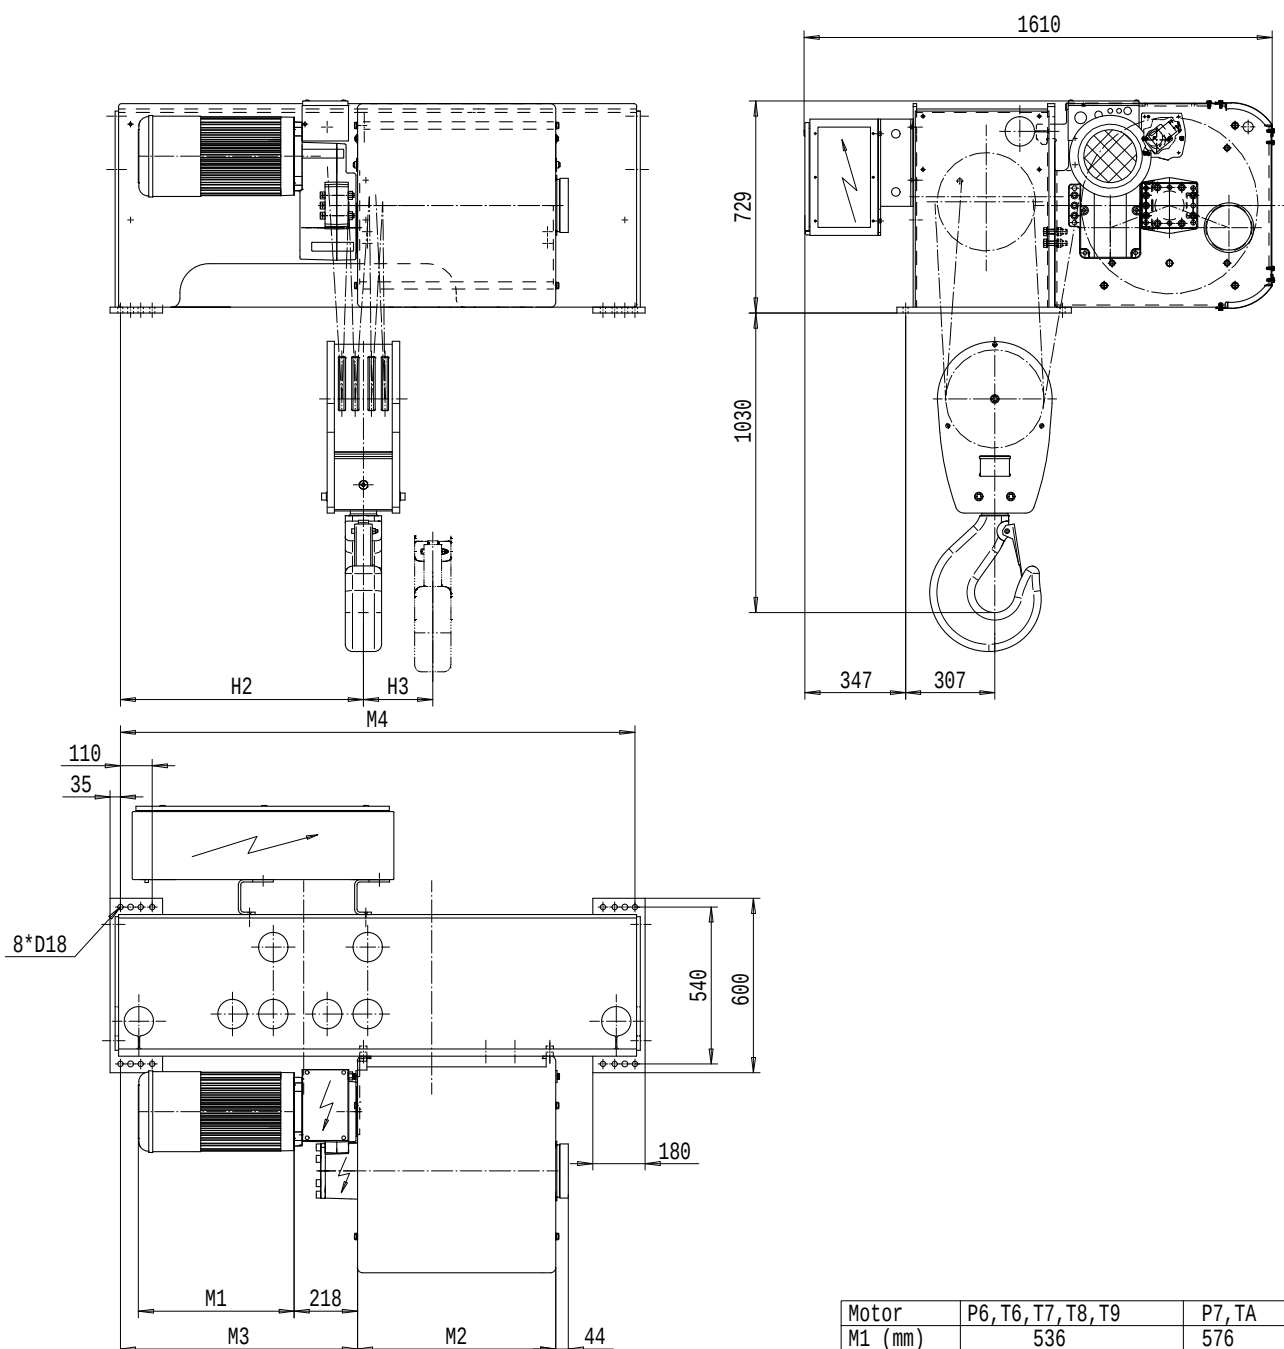

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL (m)	Length code	M2 (mm)	M3 (mm)	M4 (mm)	H2 (mm)	H3 (mm)	Weight (kg)
7	E	682	815	1770	845	63	1625
9	F	832	475	1770	508	81	1675
11,5	G	1022	475	1770	508	105	1775
15	H	1272	469	2580	502	137	2050
20	J	1622	469	2580	502	180	2150
24	K	1922	469	2580	502	217	2250

Load (kg)	Class Fem/ISO	Hoisting motor					
		Hoisting speed (m/min): Gear code					
32000	2m/M5	2/0, 3: E	2,5/0, 4: F	3,2/0, 5: G	3,2: G	4: H	5: J
40000	1Am/M4	P6, T6	P7, T7	P8, T8	T8	T9	TA

NOVA



Elektroseilzug
Electric wire rope hoist

HOIST: FIXED, 2x2 ROPE FALLS

Hoist type:
NE22F...

SWF
KRANTECHNIK

SI - 50Hz

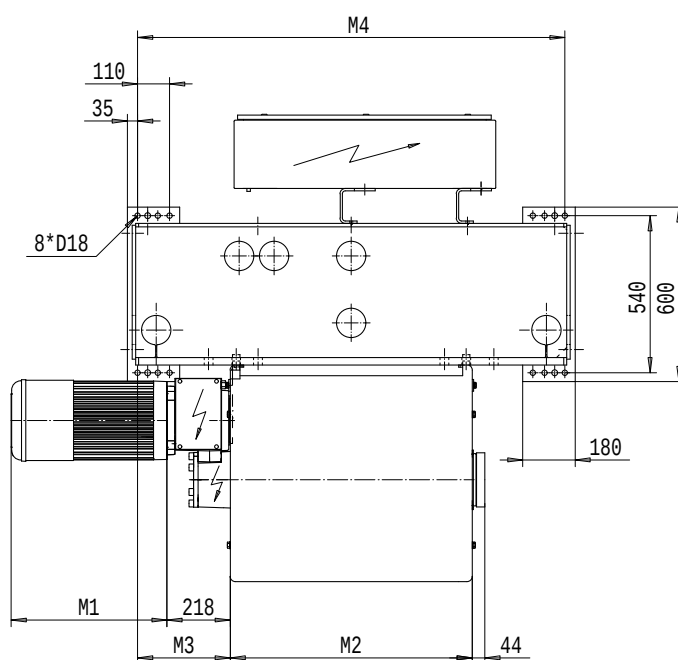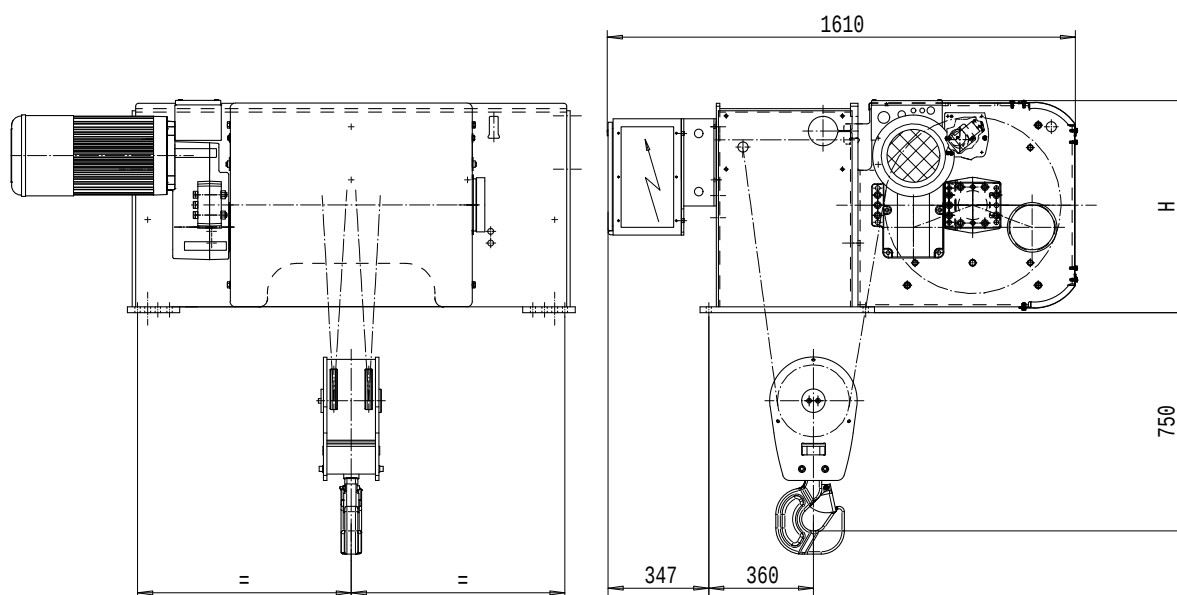

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

H0L (m)	Length code	M2 (mm)	M3 (mm)	M4 (mm)	H (mm)	Weight (kg)
17	E	682	394	1470	730	1400
23	F	832	319	1470	730	1450
30	G	1022	224	1470	730	1500
40	H	1272	599	2470	730	1825
53	J	1622	424	2470	730	1925
64,5	K	1922	274	2470	730	2025
78	L	2272	449	3170	830	2475
87,5	M	2522	324	3170	830	2575
99	N	2822	174	3170	830	2675

Load (kg)	Class	Hoisting motor					
	Fem/ISO	Hoisting speed (m/min): Gear code					
	8/1,3: E	10/1,7: F	12,5/2: G	16: H	20: J		
6300	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9	
8000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9	
10000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA	

NOVA


Elektroseilzug
Electric wire rope hoist

HOIST; FIXED, 2x4 ROPE FALLS

Hoist type:
NE24F...

SWF
KRANTECHNIK

SI-50Hz

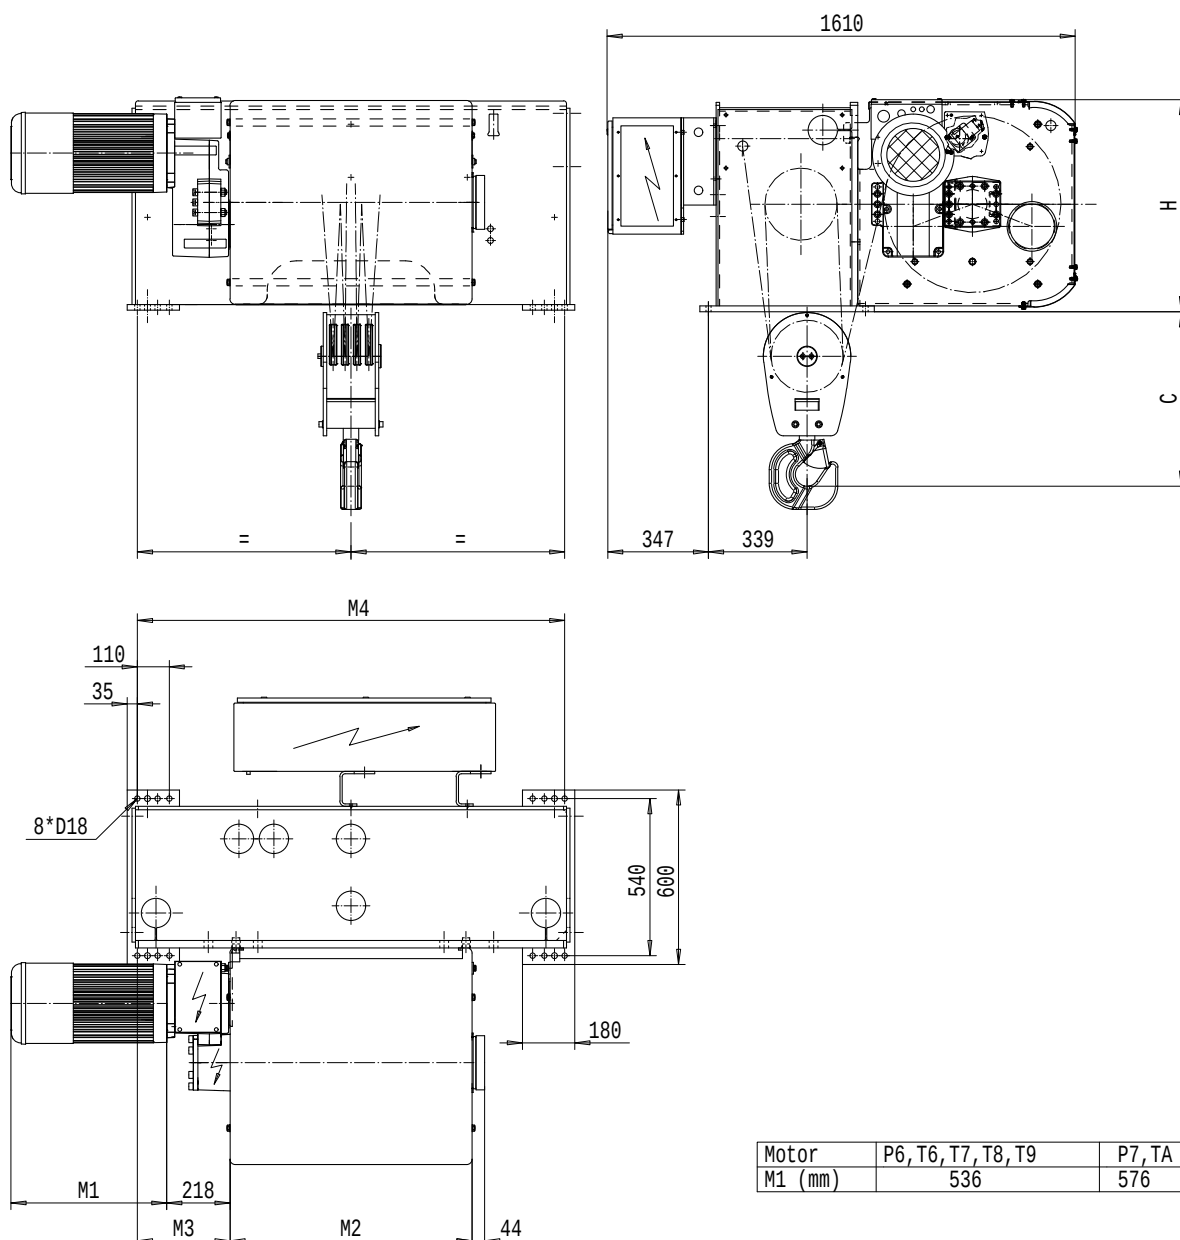

H0L (m)	Length code	M2 (mm)	M3 (mm)	M4 (mm)	H (mm)	C (mm)	Weight (kg)
8,5	E	682	394	1470	730	600	1450
11,5	F	832	319	1470	730	600	1500
15	G	1022	224	1470	730	600	1550
20	H	1272	599	2470	730	750	1875
26,5	J	1622	424	2470	730	750	1975
32	K	1922	274	2470	730	750	2075
39	L	2272	449	3170	830	750	2525
43,5	M	2522	324	3170	830	750	2625
49,5	N	2822	174	3170	830	750	2725

Load (kg)	Class Fem/ISO	Hoisting motor					
		Hoisting speed (m/min): Gear code					
		4/0,7: E	5/0,8: F	6,3/1,1: G	8: H	10: J	
12500	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9	
16000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9	
20000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA	

NOVA Elektroseilzug


Electric wire rope hoist

HOIST; FIXED, 2x6 ROPE FALLS

SWF
KRANTECHNIK

SI - 50Hz

Hoist type:
NE26F...

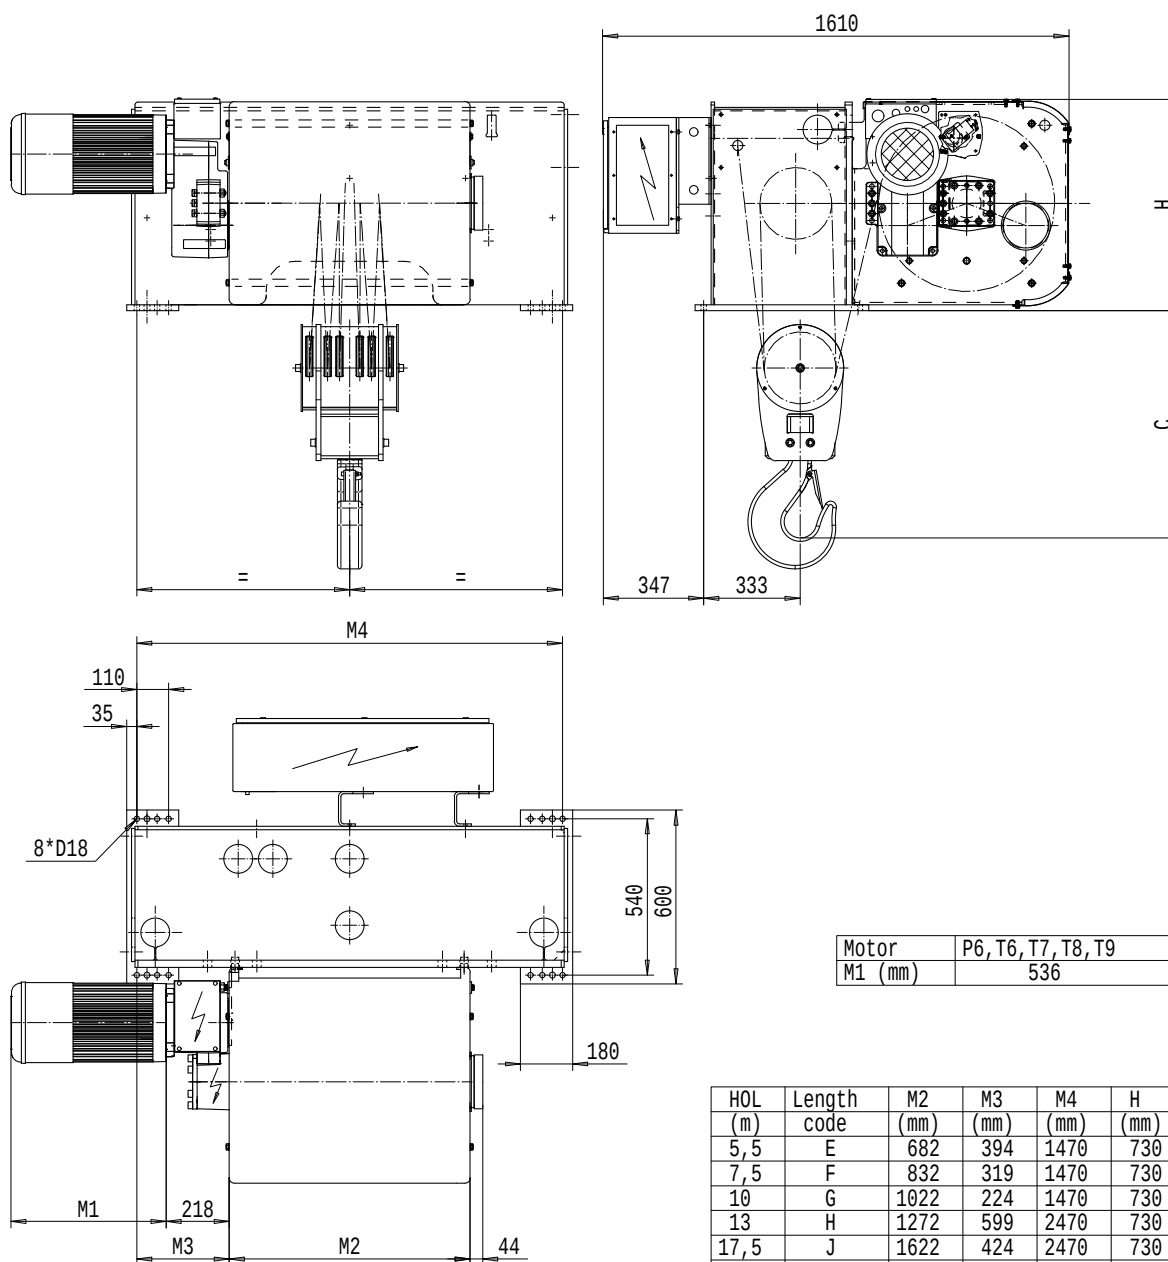

H0L (m)	Length code	M2 (mm)	M3 (mm)	M4 (mm)	H (mm)	C (mm)	Weight (kg)
5,5	E	682	394	1470	730	785	1500
7,5	F	832	319	1470	730	785	1550
10	G	1022	224	1470	730	785	1600
13	H	1272	599	2470	730	930	1925
17,5	J	1622	424	2470	730	930	2025
21,5	K	1922	474	2470	730	930	2125
26	L	2272	449	3170	830	930	2575
29	M	2522	324	3170	830	930	2675
33	N	2822	174	3170	830	930	2775

Load (kg)	Class	Hoisting motor				
	Fem/ISO	Hoisting speed (m/min): Gear code				
	2,5/0,4: E	3,2/0,5: F	4/0,7: G	5: H	6,3: J	
20000	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9
25000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9
30000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA

NOVA Elektroseilzug


Electric wire rope hoist

HOIST; FIXED, 2x8 ROPE FALLS

SWF
KRANTECHNIK

SI-50Hz

Hoist type:
NE28F...

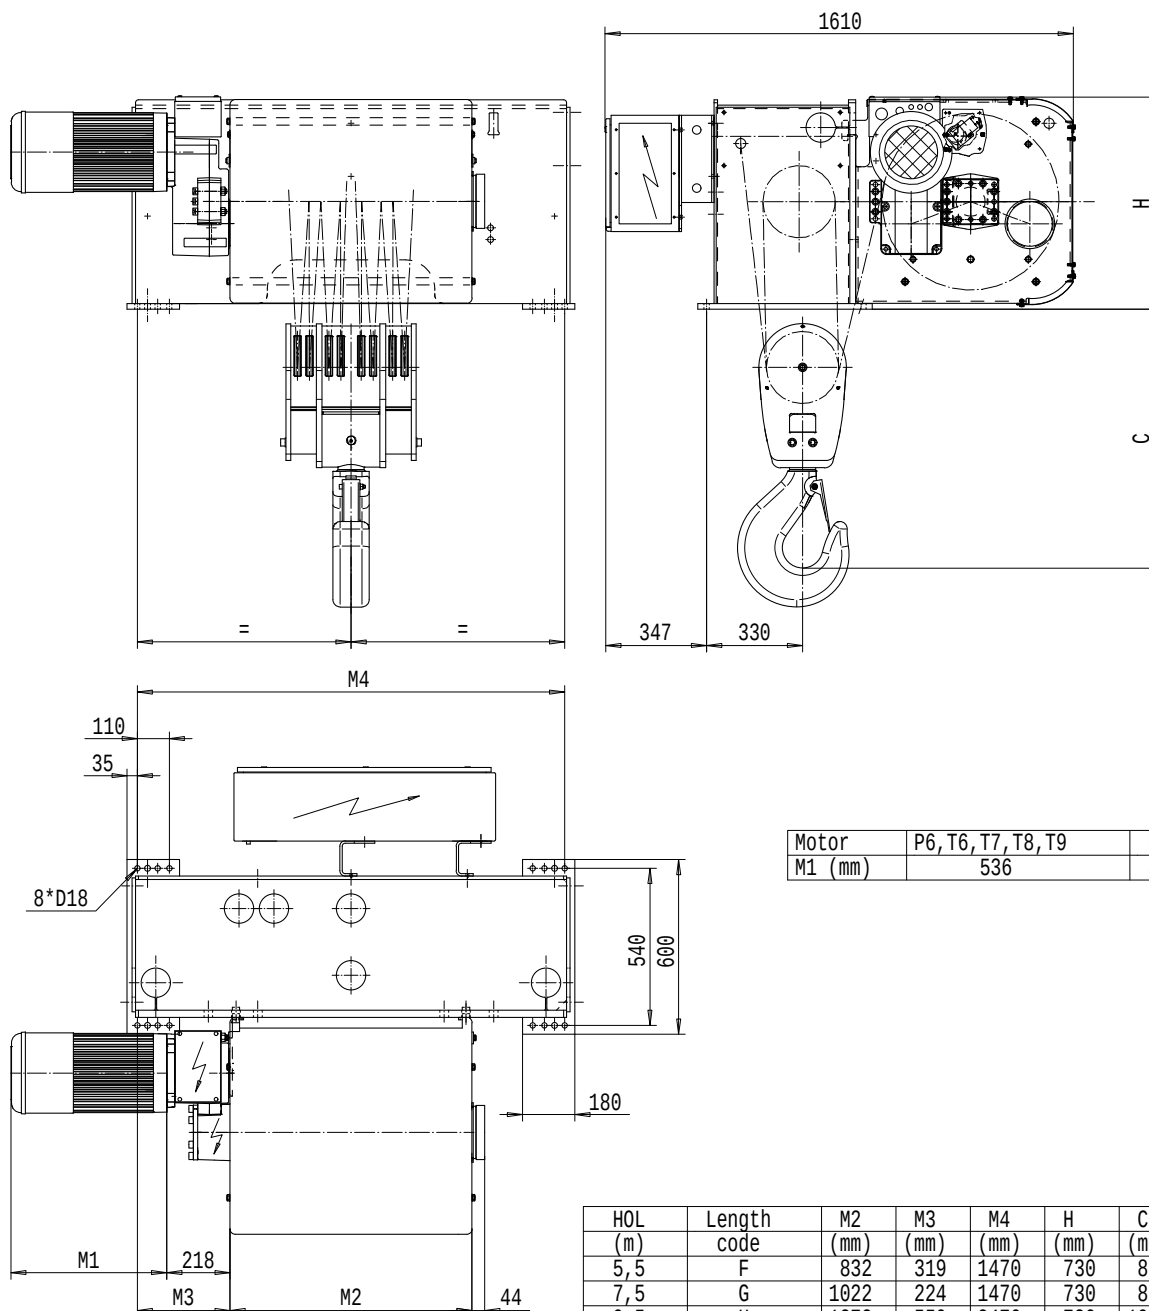

HOL	Length	M2	M3	M4	H	C	Weight
(m)	code	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
5,5	F	832	319	1470	730	890	1650
7,5	G	1022	224	1470	730	890	1700
9,5	H	1272	559	2470	730	1050	2025
13	J	1622	424	2470	730	1050	2125
16	K	1922	274	2470	730	1050	2225
19,5	L	2272	449	3170	830	1050	2675
21,5	M	2522	324	3170	830	1050	2775
24,5	N	2822	174	3170	830	1050	2875

Load	Class	Hoisting motor						
(kg)	Fem/ISO	Hoisting speed (m/min): Gear code						
	2/0, 3: E	2,5/0, 4: F		3,2/0, 5: G		3,2: G		4: H 5: J
32000	2m/M5	P6, T6	P7, T7	-	T8	T9	TA	
40000	1Am/M4	P6, T6	P7, T7	P8, T8	-	T9	TA	

NOVA Elektroseilzug






Electric wire rope hoist

TROLLEY: NORMAL HEADROOM, 2 ROPE FALLS

Hoist type:
NE02N...

SWF
KRANTECHNIK

SI-50Hz

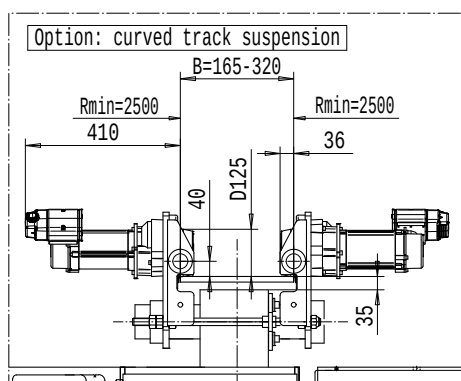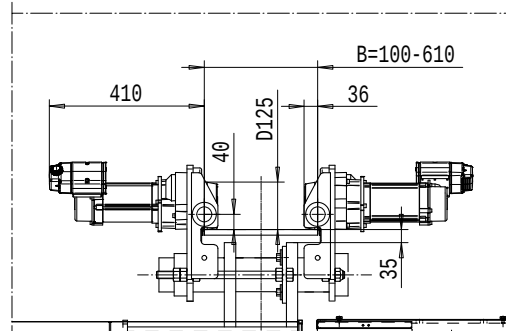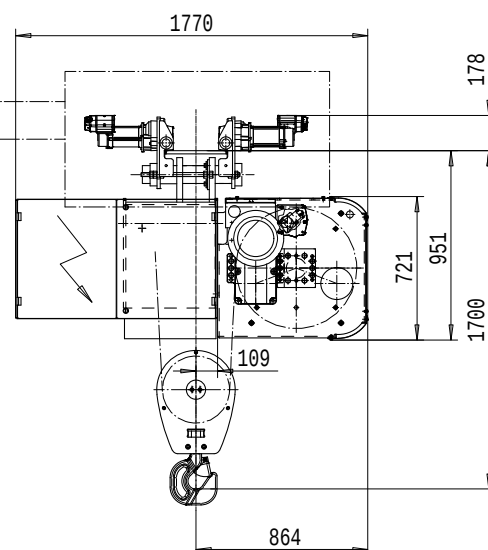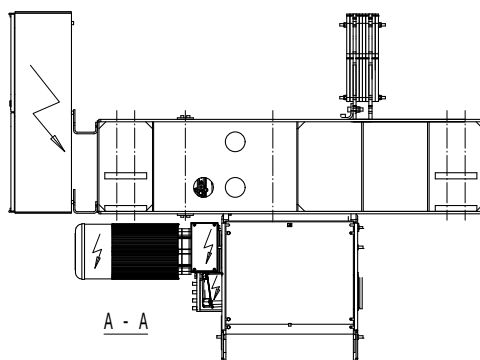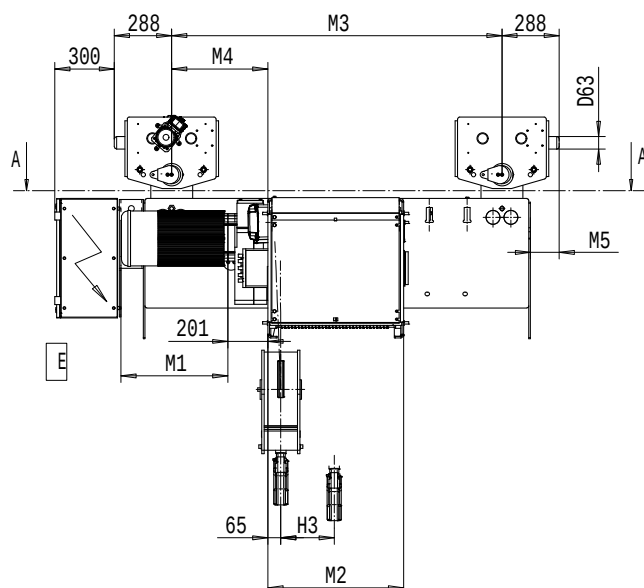

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL (m)	Length code	M2 (mm)	M3 (mm)	M4 (mm)	M5 (mm)	H3 (mm)	Weight (kg)
15,5	C	462	1200	484	145	139	1575
21	D	562	1200	484	145	188	1600
28	E	682	1660	484	145	251	1750
36	F	832	1660	484	145	322	1850
47	G	1022	1660	484	145	421	2000
61	H	1272	2000	574	-270	546	2250
80,5	J	1622	2000	574	-270	721	2550
97	K	1922	2000	574	-270	868	2750

Note:

Weight when B=300mm

Load (kg)	Class Fem/ISO	Hoisting motor				
		Hoisting speed (m/min): Gear code				
		8/1.3:E	10/1.7:F	12.5/2:G	16:H	20:J
6300	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9
8000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9
10000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA

NOVA Elektroseilzug





Electric wire rope hoist

TROLLEY; NORMAL HEADROOM, 4 ROPE FALLS


SWF
KRANTECHNIK

SI - 50Hz

TROLLEY; NORMAL HEADROOM, 4 ROPE FALLS
Hoist type:
NE04N...

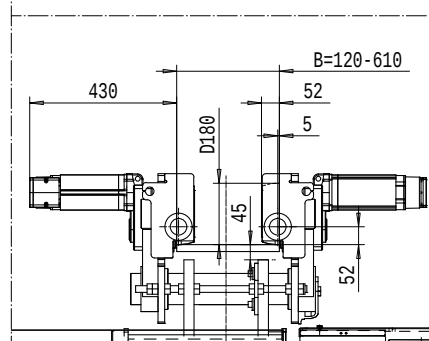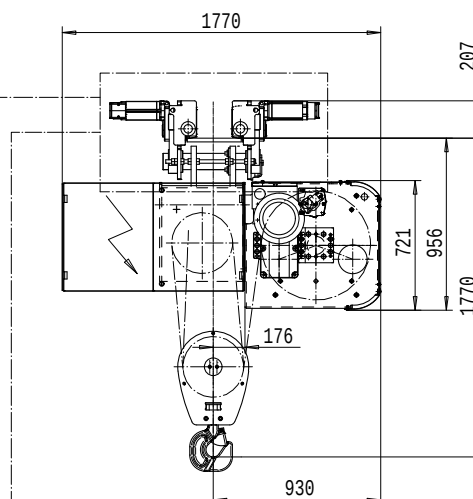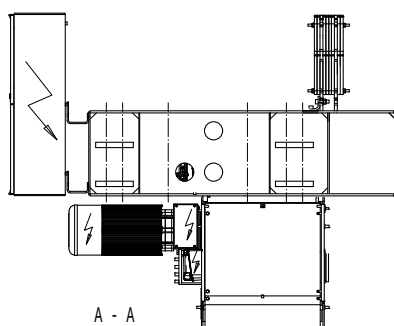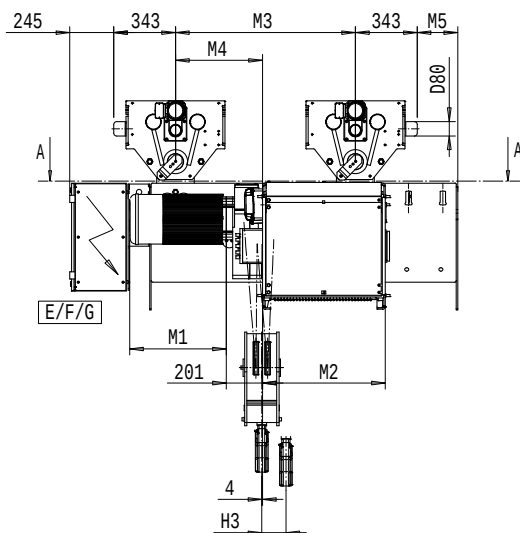

Option: curved track suspension

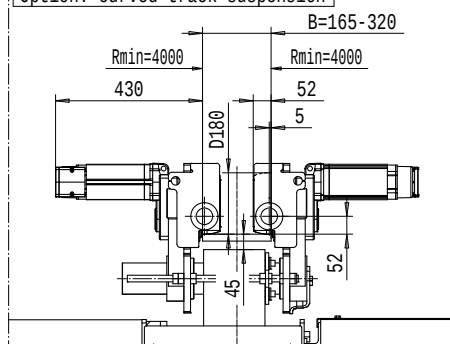

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL (m)	Length code	M2 (mm)	M3 (mm)	M4 (mm)	M5 (mm)	H3 (mm)	Weight (kg)
7,5	C	462	1200	484	-200	69	1900
10,5	D	562	1200	484	-200	94	1925
14	E	682	1000	484	225	125	2025
18	F	832	1000	484	225	161	2125
23,5	G	1022	1000	484	225	210	2275
30,5	H	1272	1450	574	765	273	2575
40	J	1622	1450	574	765	360	2875
48,5	K	1922	1450	574	765	434	3075

Note:
Weight when B=300mm

Load (kg)	Class Fem/ISO	Hoisting motor				
		Hoisting speed (m/min): Gear code				
		4/0,7: E	5/0,8: F	6,3/1,1: G	8 :H	10: J
12500	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9
16000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9
20000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA

NOVA Elektroseilzug





Electric wire rope hoist

TROLLEY; NORMAL HEADROOM, 6 ROPE FALLS


SWF
KRANTECHNIK

SI - 50Hz

Hoist type:
NE06N...

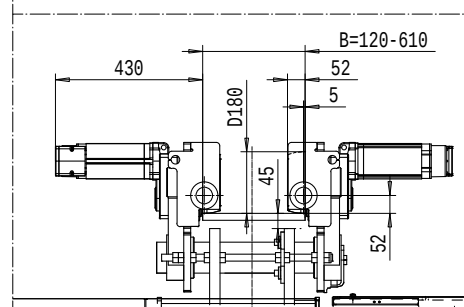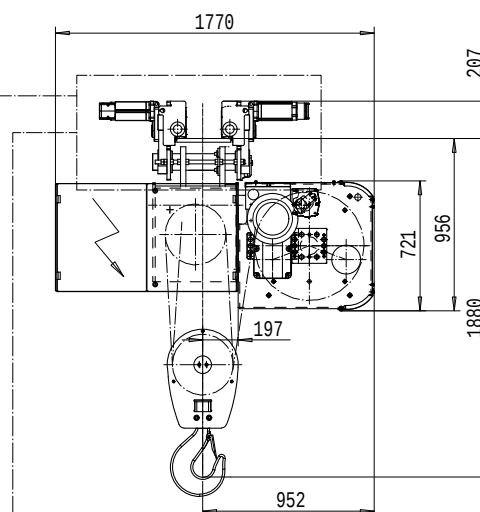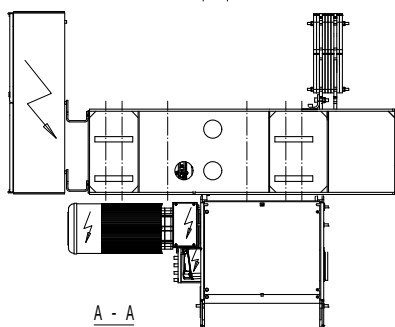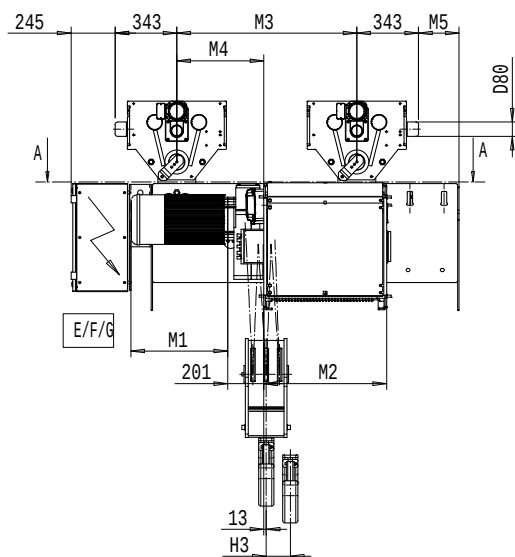

Option: curved track suspension

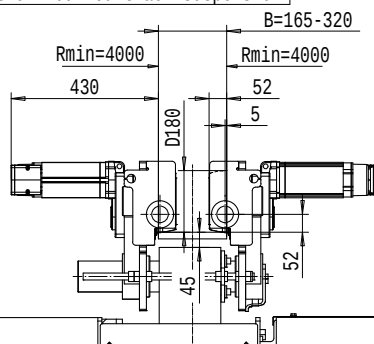

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL (m)	Length code	M2 (mm)	M3 (mm)	M4 (mm)	M5 (mm)	H3 (mm)	Weight (kg)
5	C	462	1200	484	-200	46	1975
7	D	562	1200	484	-200	63	2000
9	E	682	1000	484	225	84	2100
12	F	832	1000	484	225	107	2200
15.5	G	1022	1000	484	225	140	2350
20	H	1272	1450	574	765	182	2650
26.5	J	1622	1450	574	765	240	2950
32	K	1922	1450	574	765	289	3150

Note:
Weight when B=300mm




Load (kg)	Class Fem/ISO	Hoisting motor				
		Hoisting speed (m/min): Gear code				
		2,5/0,4:E	3,2/0,5:F	4/0,7: G	5: H	6,3: J
20000	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9
25000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9
30000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA

NOVA

Elektroseilzug
Electric wire rope hoist
TROLLEY; NORMAL HEADROOM, 8 ROPE FALLS
Hoist type:
NE08N...

SWF
KRANTECHNIK

SI-50Hz

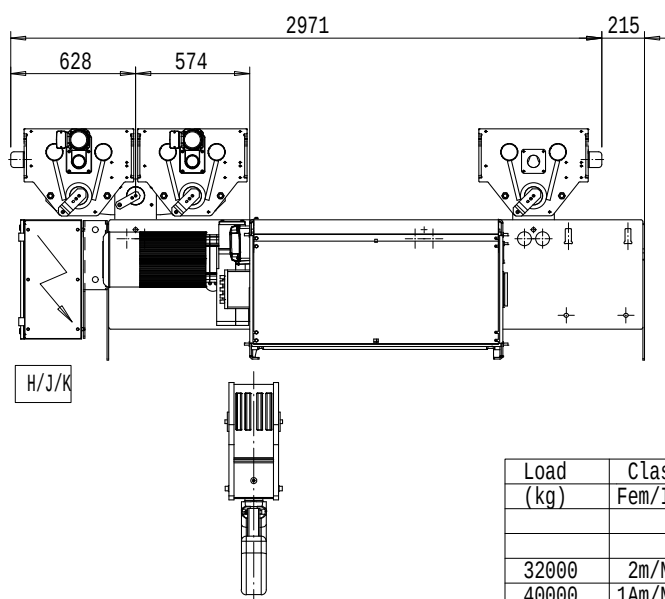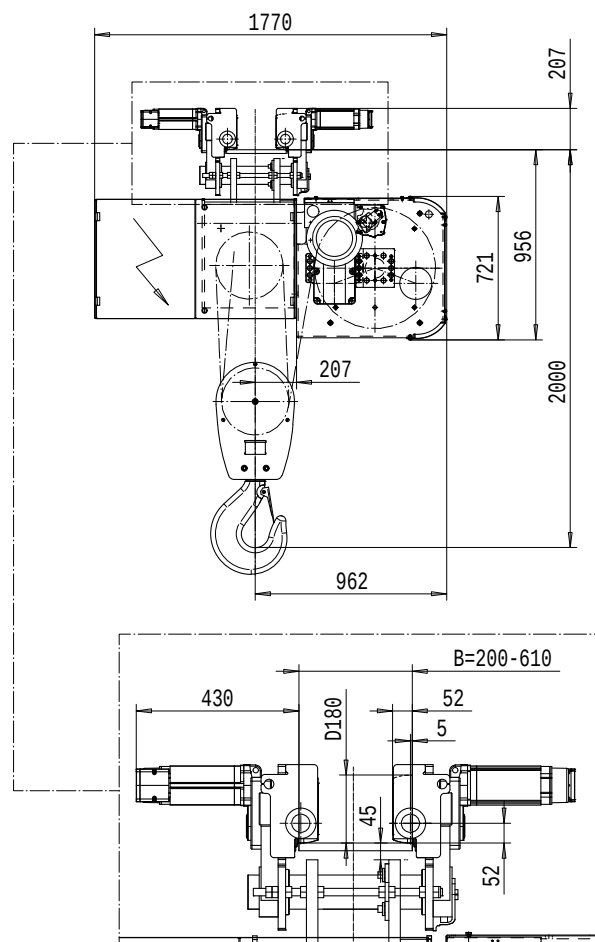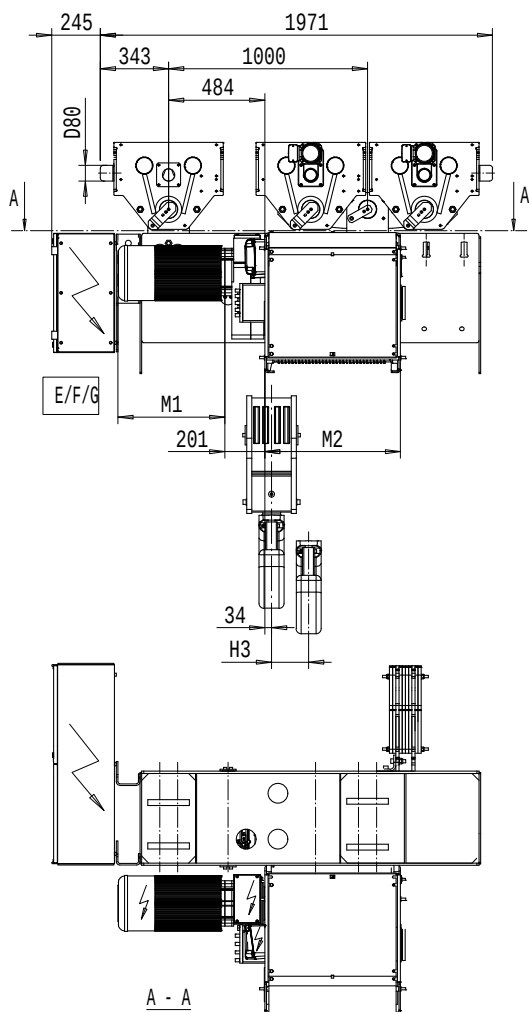

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL (m)	Length code	M2 (mm)	H3 (mm)	Weight (kg)
7	E	682	63	2500
9	F	832	81	2650
11,5	G	1022	105	2750
15	H	1272	137	3100
20	J	1622	180	3350
24	K	1922	217	3550

Note:
Weight when B=300mm

Load (kg)	Class Fem/ISO	Hoisting motor Hoisting speed (m/min): Gear code				
		2/0,3:E	2,5/0,4:F	3,2/0,5: G	4: H	5: J
32000	2m/M5	P6, T6	P7, T7	P8, T8	T9	TA
40000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA

NOVA Elektroseilzug






Electric wire rope hoist

TROLLEY; NORMAL HEADROOM, 2X2 ROPE FALLS

Hoist type:
NE22N...

SWF
KRANTECHNIK

SI-50Hz

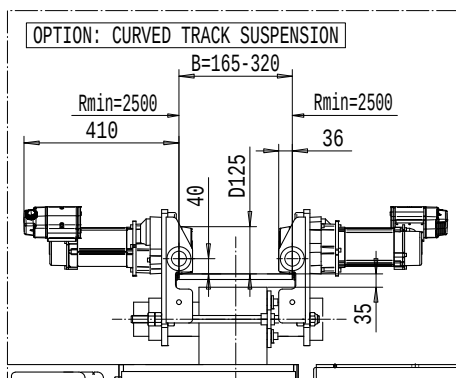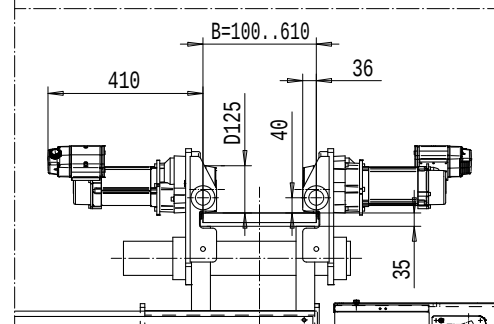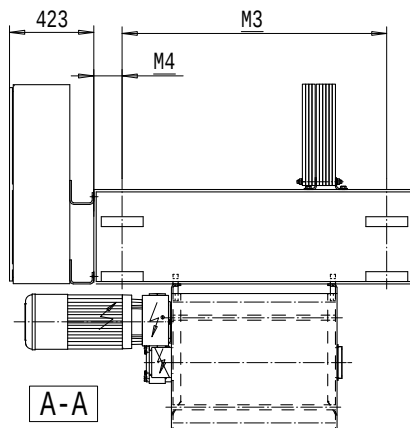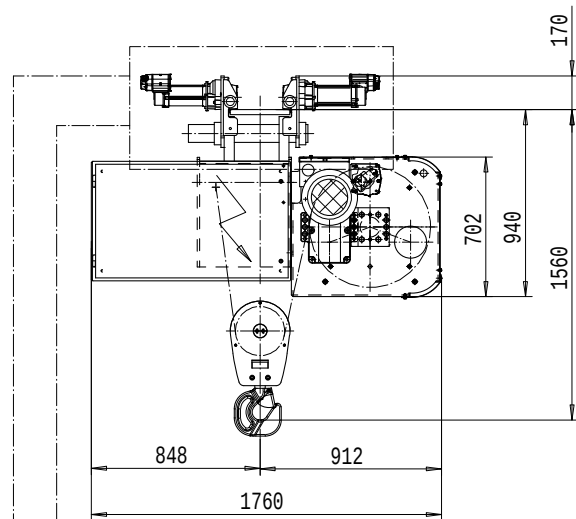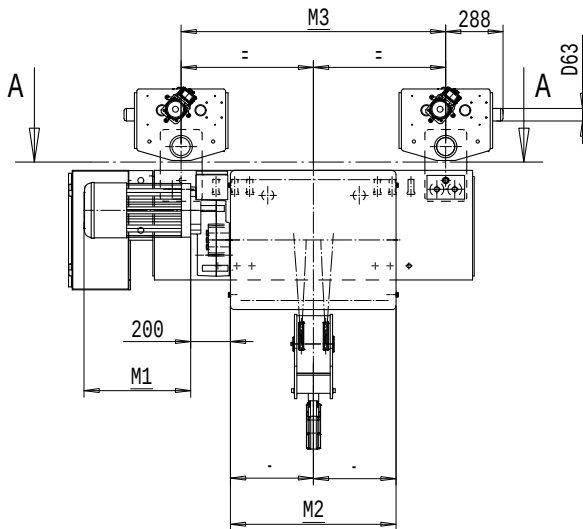

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL (m)	Length code	M2 (mm)	M3 (mm)	M4 (mm)	Weight (kg)
17	E	682	1330	145	1600
23	F	832	1330	145	1700
30	G	1022	1330	145	1800
40	H	1272	1930	145	2000
53	J	1622	1930	145	2250
64,5	K	1922	1330	530	2450
78	L	2272	1330	530	2800
87,5	M	2522	1330	805	3000
99	N	2822	1330	805	3250

Note:

Weight when B=300mm

Load (kg)	Class Fem/ISO	Hoisting motor				
		Hoisting speed (m/min): Gear code				
		8/1,3: E	10/1,7: F	12,5/2,1: G	16: H	20: J
6300	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9
8000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9
10000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA

NOVA Elektroseilzug






Electric wire rope hoist

TROLLEY: NORMAL HEADROOM, 2x4 ROPE FALLS

Hoist type:
NE24N...

SWF
KRANTECHNIK

SI-50Hz

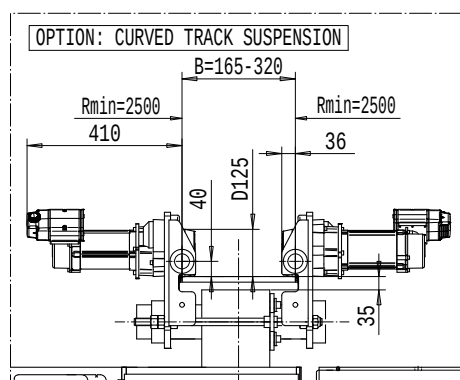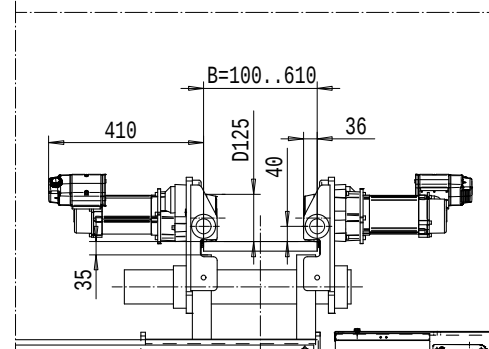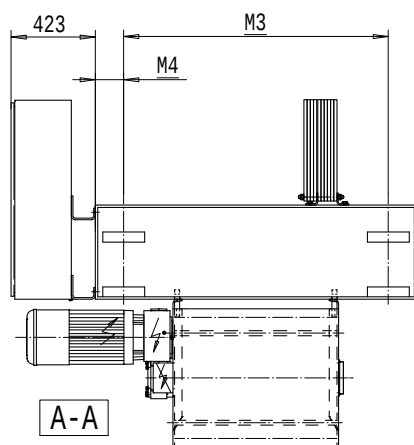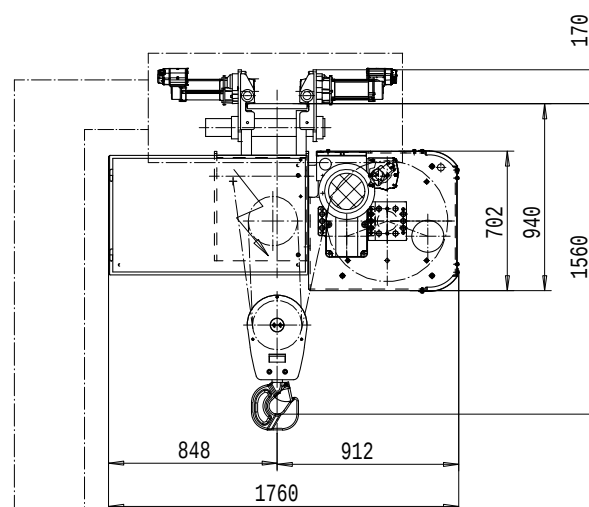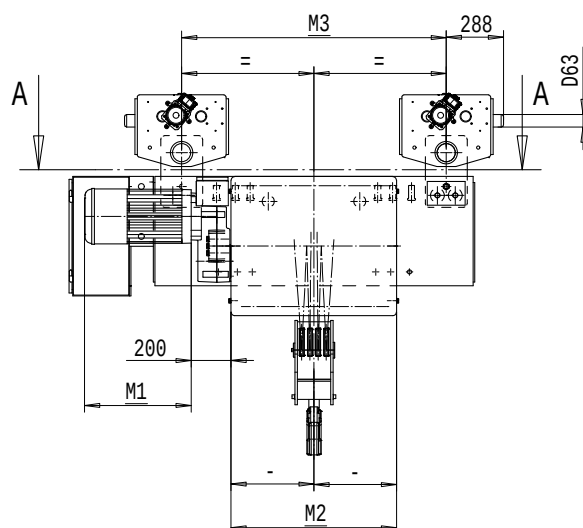

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL (m)	Length code	M2 (mm)	M3 (mm)	M4 (mm)	Weight (kg)
8,5	E	682	1330	145	1650
11,5	F	832	1330	145	1750
15	G	1022	1330	145	1850
20	H	1272	1930	145	2050
26,5	J	1622	1930	145	2300
32	K	1922	1330	530	2500
39	L	2272	1330	530	2850
43,5	M	2522	1330	805	3050
49,5	N	2822	1330	805	3300

Note:

Weight when B=300mm

Load (kg)	Class Fem/ISO	Hoisting motor				
		Hoisting speed (m/min): Gear code				
		4/0, 7: E	5/0, 8: F	6, 3/1, 1: G	8: H	10: J
12500	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9
16000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9
20000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA

NOVA Elektroseilzug






Electric wire rope hoist

TROLLEY: NORMAL HEADROOM, 2x6 ROPE FALLS

Hoist type:
NE26N...

SWF
KRANTECHNIK

SI-50Hz

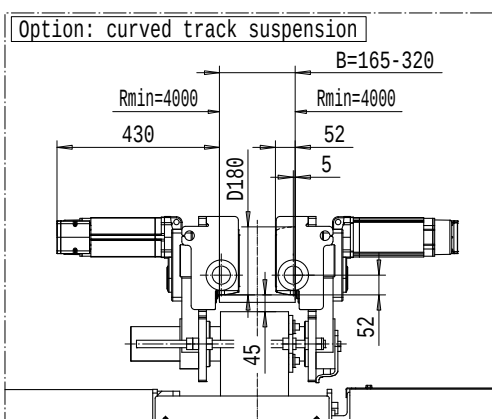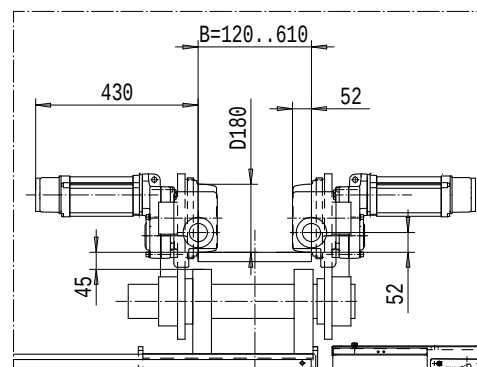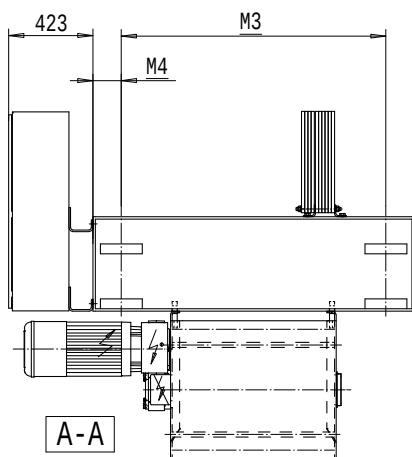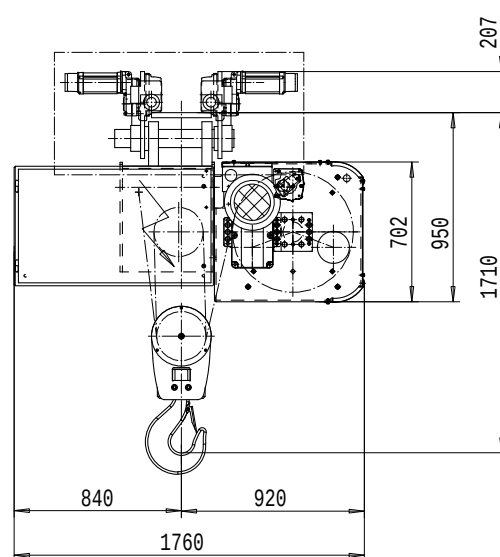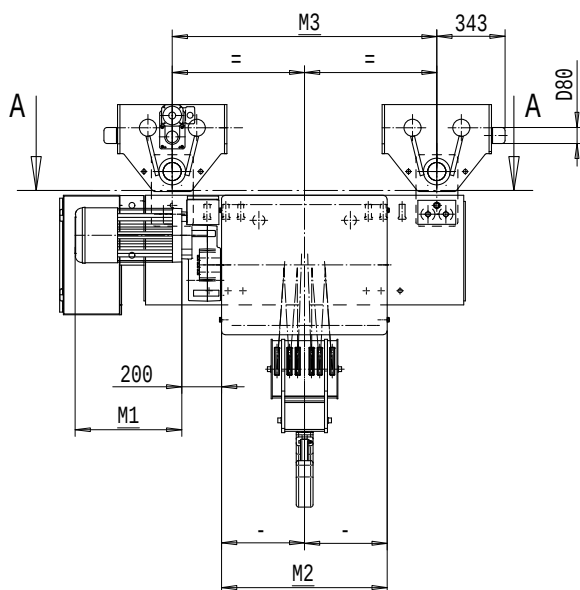

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL (m)	Length code	M2 (mm)	M3 (mm)	M4 (mm)	Weight (kg)
5,5	E	682	1330	145	1850
7,5	F	832	1330	145	1950
10	G	1022	1330	145	2050
13	H	1272	1930	145	2250
17,5	J	1622	1930	145	2500
21,5	K	1922	1330	530	2700
26	L	2272	1330	530	3050
29	M	2522	1330	805	3250
33	N	2822	1330	805	3500

Note:
Weight when B=300mm

Load (kg)	Class Fem/ISO	Hoisting motor				
		Hoisting speed (m/min): Gear code				
		2,5/0,4:E	3,2/0,5:F	4/0,7: G	5: H	6,3: J
20000	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9
25000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9
30000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA

NOVA Elektroseilzug






Electric wire rope hoist

TROLLEY: NORMAL HEADROOM, 2X8 ROPE FALLS

Hoist type:
NE28N...

SWF
KRANTECHNIK

SI-50Hz

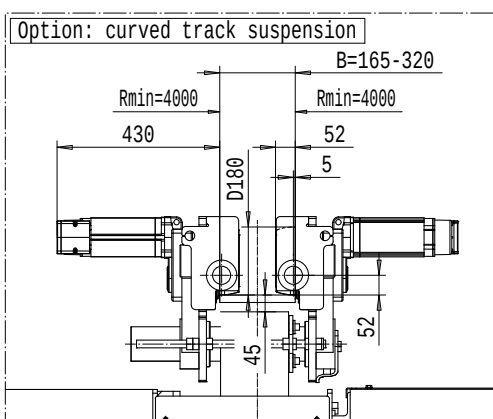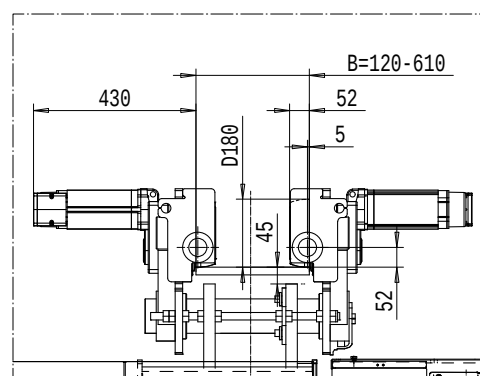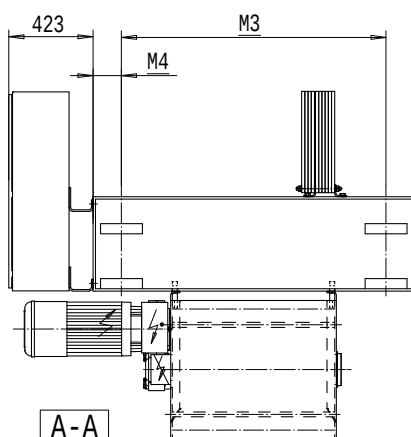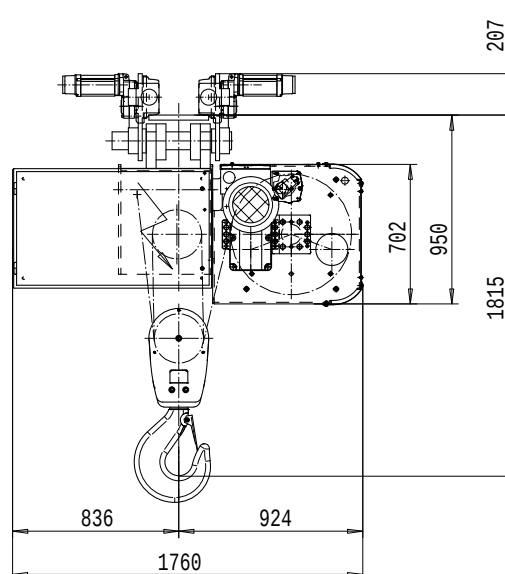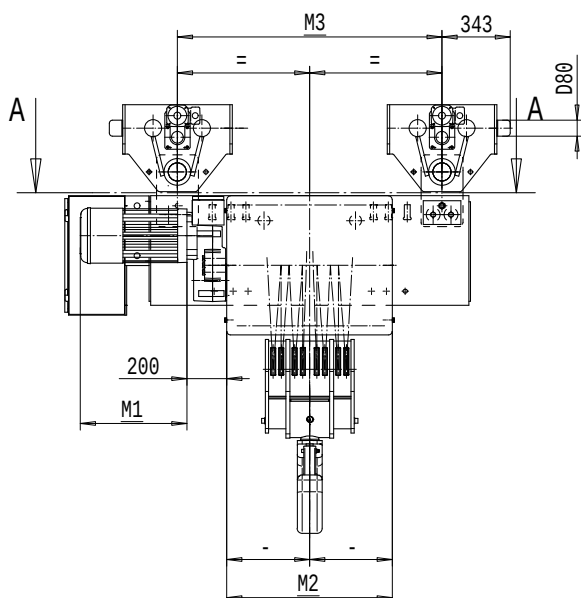

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL (m)	Length code	M2 (mm)	M3 (mm)	M4 (mm)	Weight (kg)
5,5	F	832	1330	145	2050
7,5	G	1022	1330	145	2150
9,5	H	1272	1930	145	2350
13	J	1622	1930	145	2600
16	K	1922	1330	530	2800
19,5	L	2272	1330	530	3150
21,5	M	2522	1330	805	3350
24,5	N	2822	1330	805	3600

Note:

Weight when B=300mm

Load (kg)	Class Fem/ISO	Hoisting motor				
		Hoisting speed (m/min): Gear code				
		2/0,3:E	2,5/0,4:F	3,2/0,5: G	4: H	5: J
32000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9
40000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA

NOVA Elektroseilzug


Electric wire rope hoist

TROLLEY: DOUBLE GIRDER, MEDIUM, 2 ROPE FALLS

Hoist type:
NE02M...

SWF
KRANTECHNIK

SI-50Hz

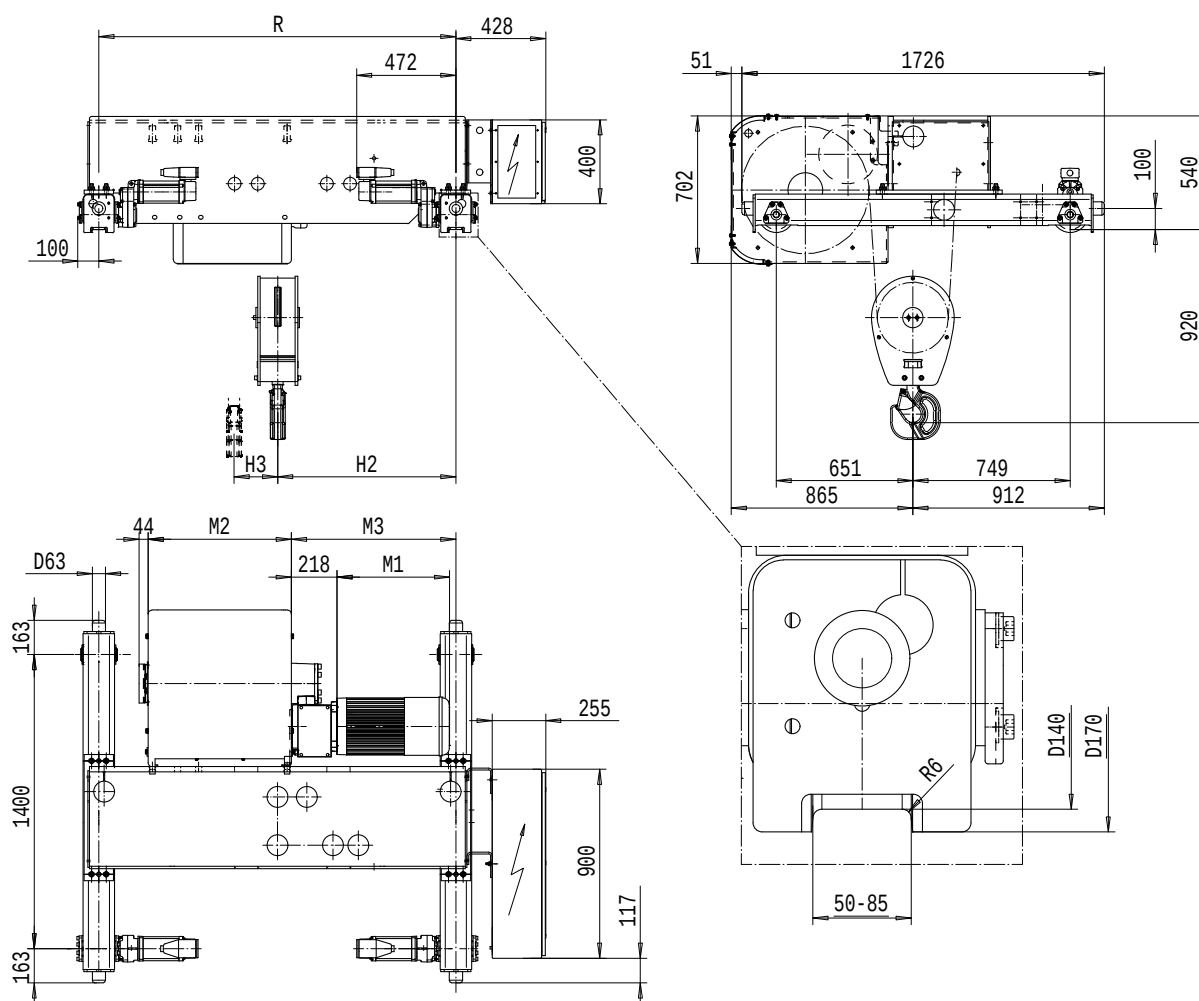

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL	Length	M2	M3	H2	H3	min R-max R	Weight
(m)	code	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
15,5	C	462	658	723	139	1400-2400	1600
21	D	562	784	859	188	1700-2400	1700
28	E	682	784	859	251	1700-3100	1740
36	F	832	934	985	322	2000-3800	1860
47	G	1022	1144	1141	421	2400-4200	2020
61	H	1272	1480	1468	546	3100-4200	2210
80,5	J	1622	1544	1567	721	3400-4200	2510
97	K	1922	1970	1929	868	4200-4200	2870

Note:

Min R with service platform

Standard rail gauges: 1400, 1700, 2000, 2400, 2700, 3100, 3400, 3800 and 4200


H2, M3 and weight calculated with the min R

Load (kg)	Class Fem/ISO	Hoisting motor					
		Hoisting speed (m/min): Gear code					
		8/1,3: E	10/1,7: F	12,5/2,1: G	16: H	20: J	
6300	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9	
8000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9	
10000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA	

TROLLEY; DOUBLE GIRDER, MEDIUM, 4 ROPE FALLS

SI-50Hz

Hoist type:
NE04M...

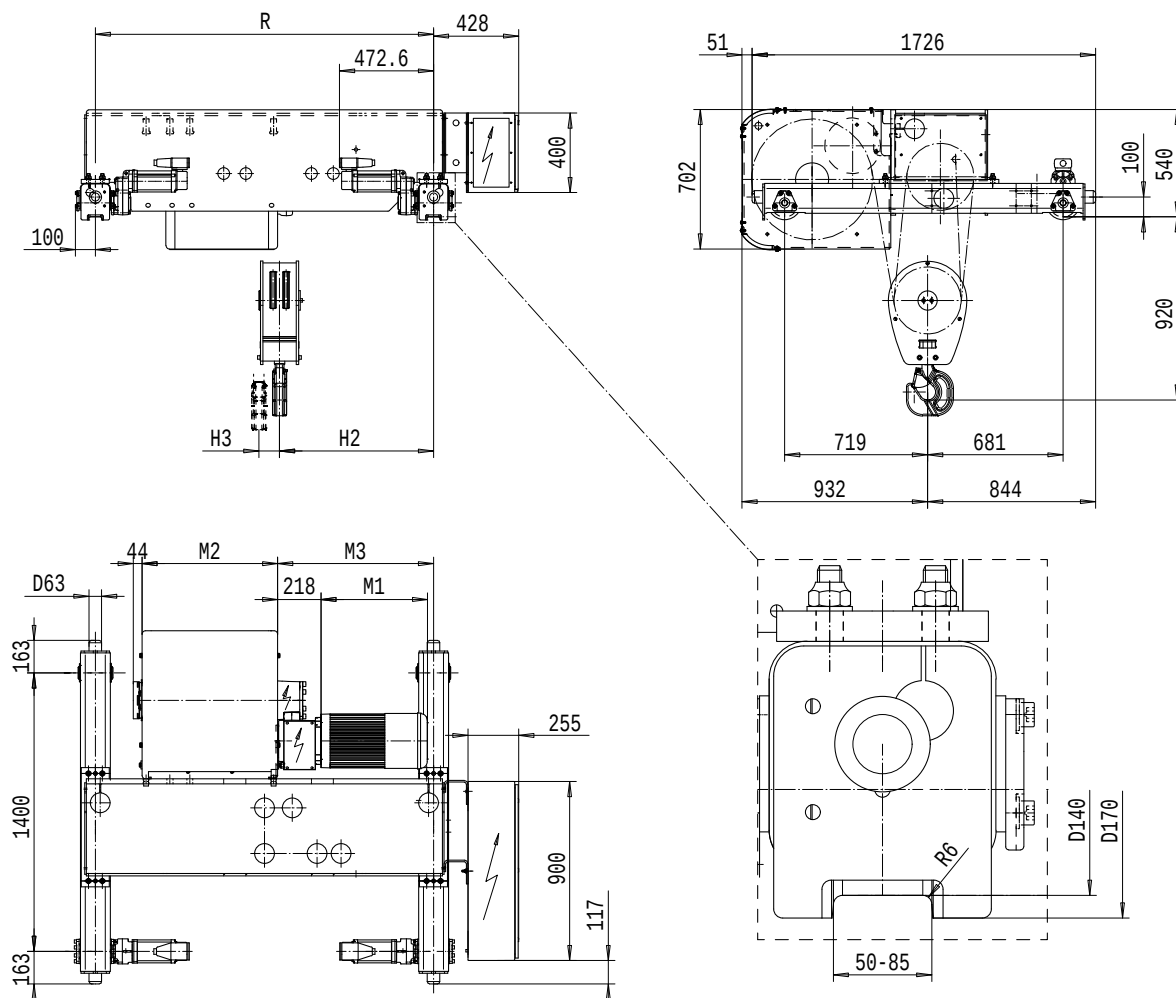

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	min R-max R (mm)	Weight (kg)
7,5	C	462	658	668	69	1400-2400	1690
10,5	D	562	783	788	94	1700-2400	1790
14	E	682	783	788	125	1700-3100	1850
18	F	832	933	914	161	2000-3800	1950
23,5	G	1022	1143	1068	210	2400-4200	2110
30,5	H	1272	1479	1395	273	3100-4200	2300
40	J	1622	1543	1494	360	3400-4200	2610
48,5	K	1922	1969	1856	434	4200	2960

Note:

Min R with service platform

Standard rail gauges: 1400, 1700, 2000, 2400, 2700, 3100, 3400, 3800 and 4200

H2, M3 and weight calculated with the min R

Load (kg)	Class Fem/ISO	Hoisting motor				
		Hoisting speed (m/min): Gear code				
		4/0, 7: E	5/0, 8: F	6, 3/1, 1: G	8: H	10: J
12500	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9
16000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9
20000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA

NOVA Elektroseilzug


Electric wire rope hoist

TROLLEY; DOUBLE GIRDER, MEDIUM, 6 ROPE FALLS

Hoist type:
NE06M...

SWF
KRANTECHNIK

SI-50Hz

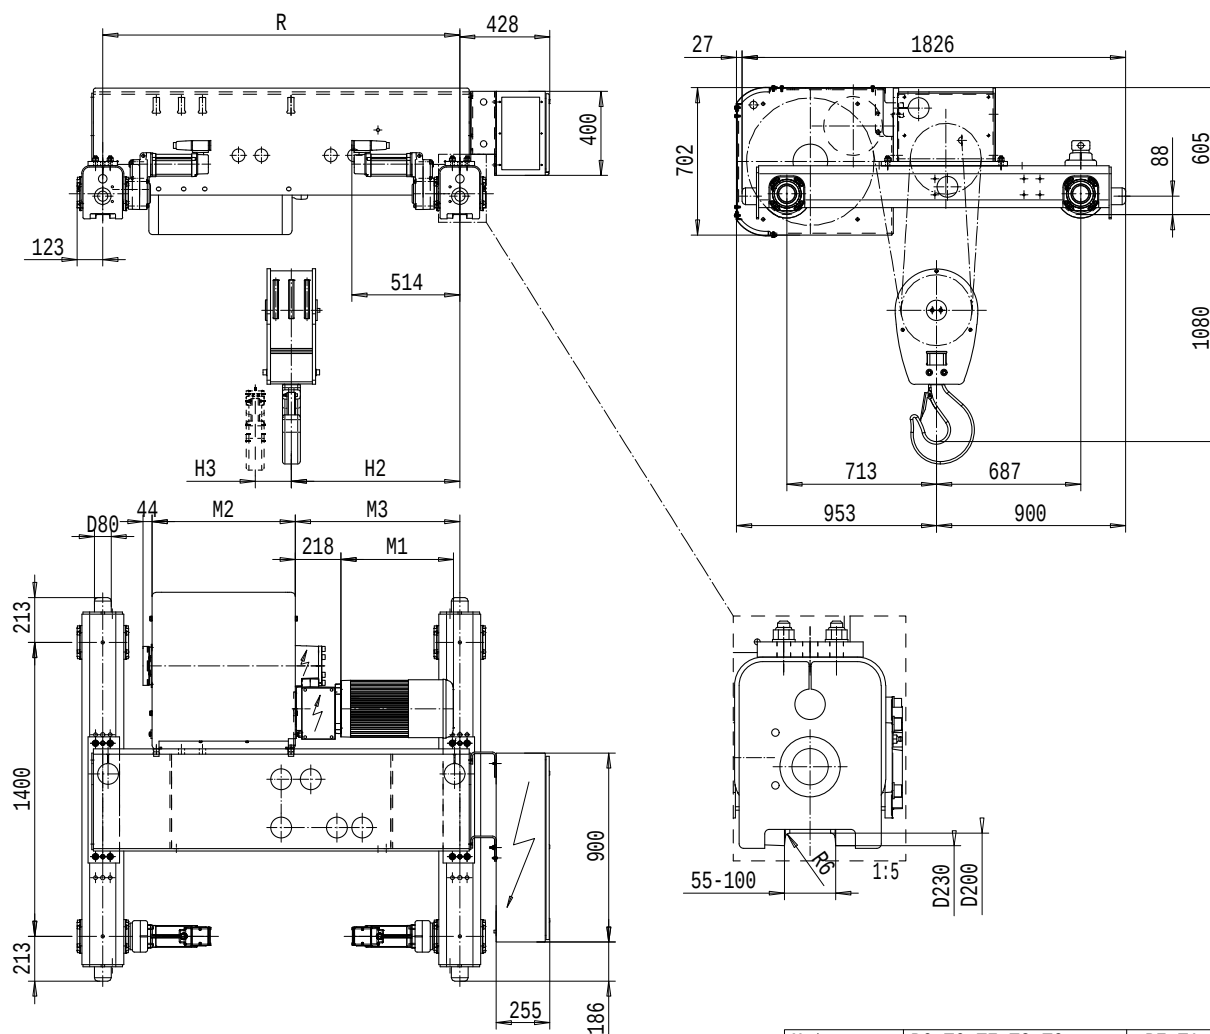

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

H0L	Length	M2	M3	H2	H3	min R-max R	Weight
(m)	code	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
5	C	462	658	678	46	1400-2400	2050
7	D	562	784	810	63	1700-2400	2140
9	E	682	784	810	84	1700-3100	2190
12	F	832	934	936	107	2000-3800	2310
15,5	G	1022	1144	1117	140	2400-4200	2460
20	H	1272	1480	1424	182	3100-4200	2750
26,5	J	1622	1544	1543	240	3800-4200	3080
32	K	1922	1970	1944	289	4200	3320


Note:

Min R with service platform

Standard rail gauges: 1400, 1700, 2000, 2400, 2700, 3100, 3400, 3800 and 4200

H2, M3 and weight calculated with the min R

Load	Class	Hoisting motor				
(kg)	Fem/ISO	Hoisting speed (m/min): Gear code				
		2,5/0,4: E	3,2/0,5: F	4/0,7: G	5: H	6,3: J
20000	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9
25000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9
30000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA

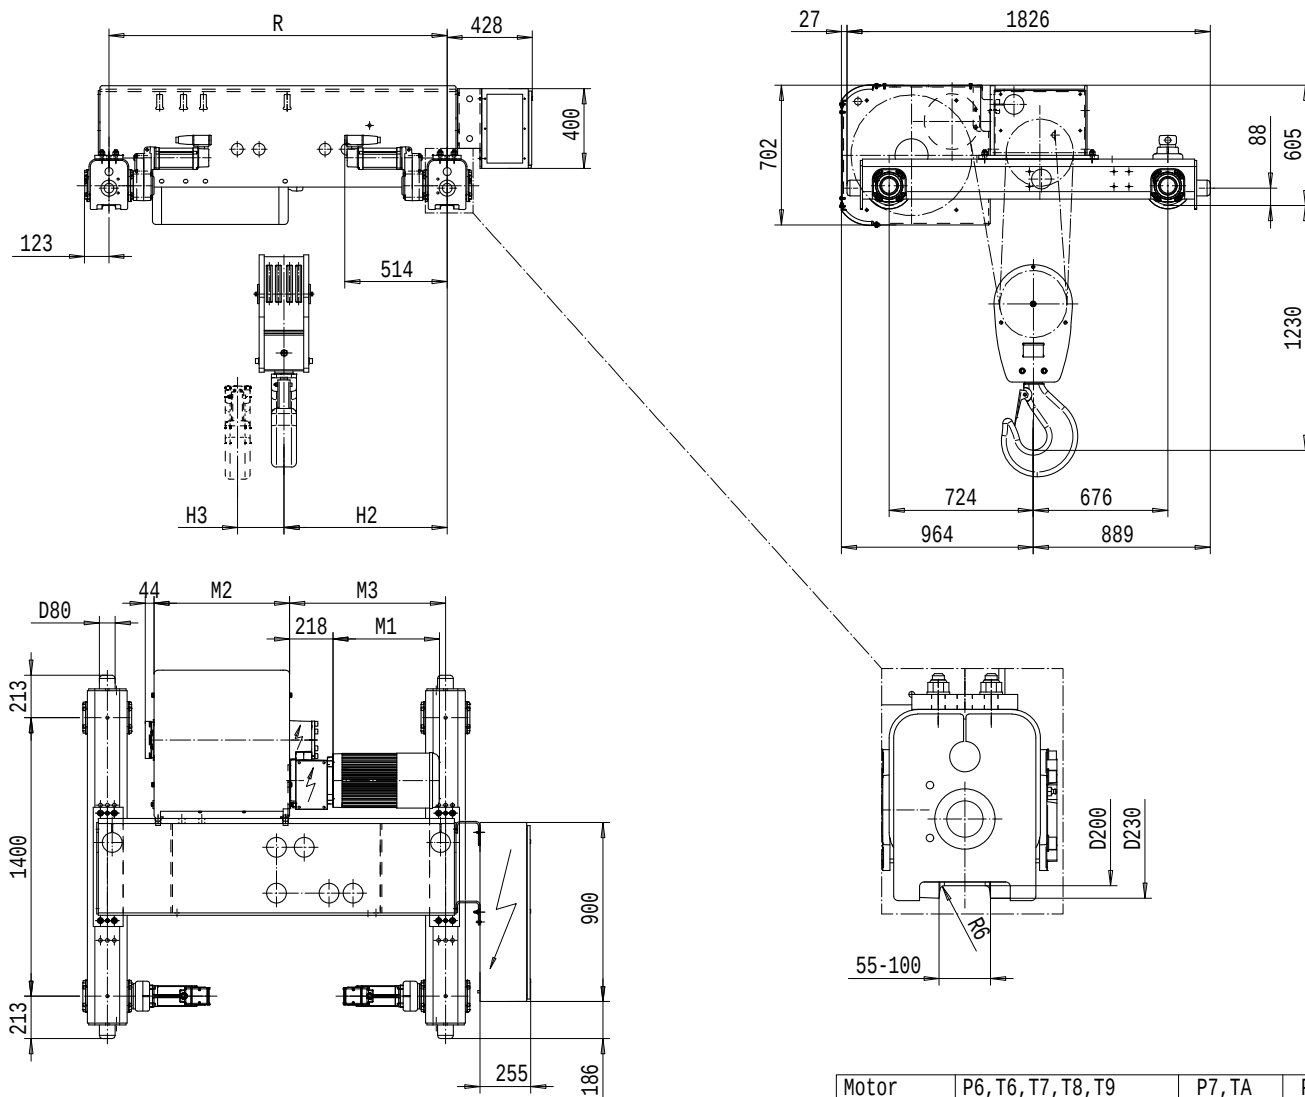

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL	Length	M2	M3	H2	H3	min R-max R	Weight
(m)	code	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
7	E	682	784	817	63	1700-3100	2280
9	F	832	934	959	81	2000-3800	2400
11,5	G	1022	1144	1145	105	2400-4200	2560
15	H	1272	1480	1497	137	3100-4200	2840
20	J	1622	1544	1582	180	3800-4200	3180
24	K	1922	1970	1989	217	4200	3410

Note:

Min R with service platform

Standard rail gauges: 1400, 1700, 2000, 2400, 2700, 3100, 3400, 3800 and 4200

H2, M3 and weight calculated with the min R

Load	Class	Hoisting motor					
		Fem/ISO	Hoisting speed (m/min): Gear code				
			2/0,3: E	2,5/0,4: F	3,2/0,5: G	3,2: G	4: H 5: J
32000	2m/M5	P6, T6	P7, T7			T8	T9 TA
40000	1Am/M4	P6, T6	P7, T7	P8, T8			T9 TA

NOVA Elektroseilzug


Electric wire rope hoist

TROLLEY; DOUBLE GIRDER, MEDIUM, 2X2 ROPE FALLS

Hoist type:
NE22M...

SWF
KRANTECHNIK

SI-50Hz

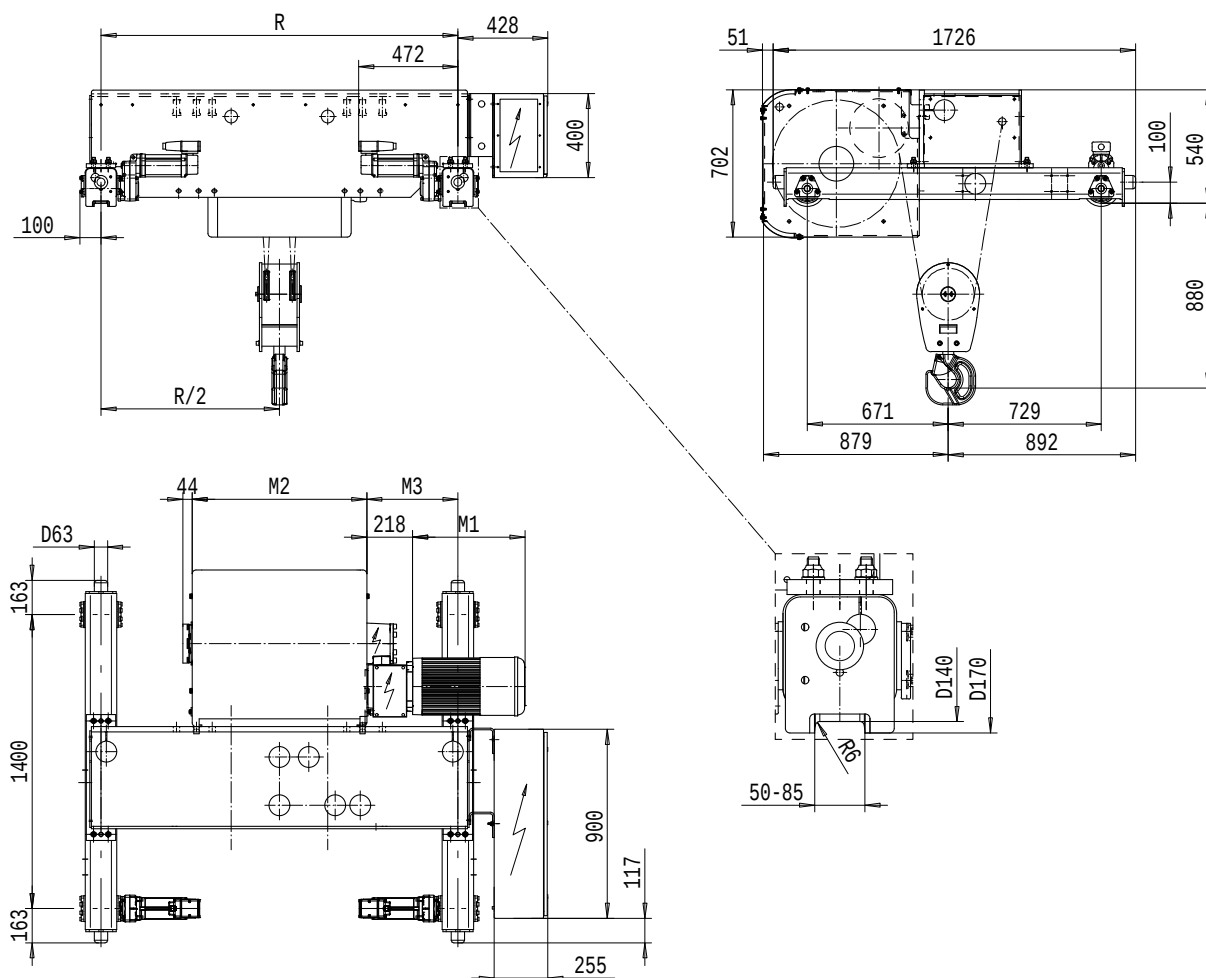

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL (m)	Length code	M2 (mm)	M3 (mm)	min R-max R (mm)	Weight (kg)
17	E	682	359	1400-2400	1710
23	F	832	434	1700-2400	1810
30	G	1022	339	1700-2700	1880
40	H	1272	364	2000-3100	2030
53	J	1622	389	2400-3400	2240
64,5	K	1922	389	2700-4200	2470
78	L	2272	414	3100-4200	2700
87,5	M	2522	439	3400-4200	2810
99	N	2822	489	3800-4200	3140

Note:

Min R with service platform

Standard rail gauges: 1400, 1700, 2000, 2400, 2700, 3100, 3400, 3800 and 4200

M3 and weight calculated with the min R

Load (kg)	Class Fem/ISO	Hoisting motor				
		Hoisting speed (m/min): Gear code				
		8/1,3: E	10/1,7: F	12,5/2,1: G	16: H	20: J
6300	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9
8000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9
10000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA

NOVA


Elektroseilzug
Electric wire rope hoist

TROLLEY; DOUBLE GIRDER, MEDIUM, 2X4 ROPE FALLS

Hoist type:
NE24M...

SWF
KRANTECHNIK

SI-50Hz

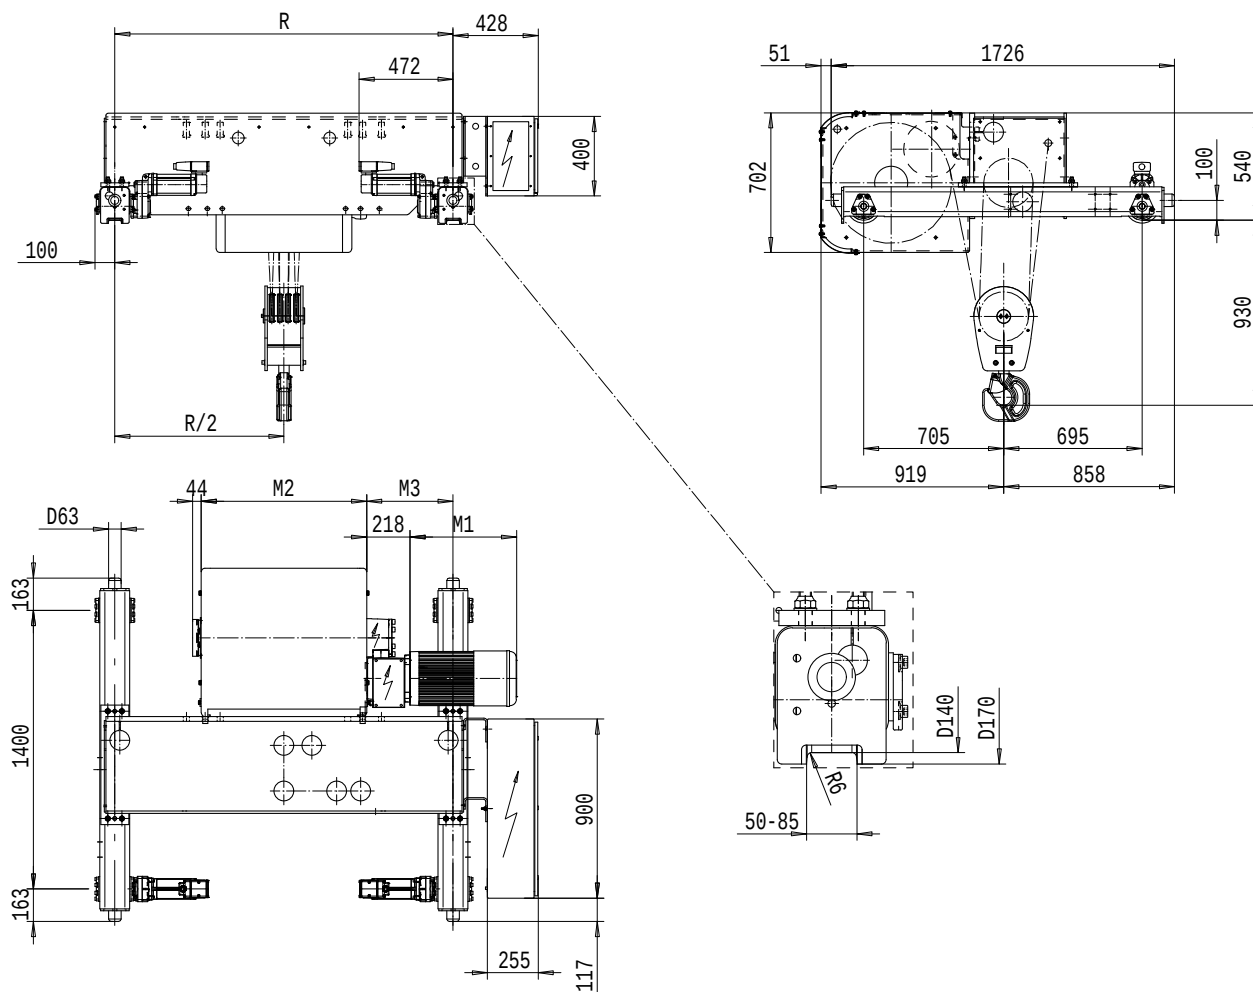

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL (m)	Length code	M2 (mm)	M3 (mm)	min R-max R (mm)	Weight (kg)
8,5	E	682	359	1400-2400	1730
11,5	F	832	434	1700-2400	1830
15	G	1022	339	1700-2700	1900
20	H	1272	364	2000-3100	2050
26,5	J	1622	389	2400-3400	2260
32	K	1922	389	2700-4200	2490
39	L	2272	414	3100-4200	2720
43,5	M	2522	439	3400-4200	2830
49,5	N	2822	489	3800-4200	3160

Note:

Min R with service platform

Standard rail gauges: 1400, 1700, 2000, 2400, 2700, 3100, 3400, 3800 and 4200

M3 and weight calculated with the min R

Load (kg)	Class Fem/ISO	Hoisting motor				
		Hoisting speed (m/min): Gear code				
		4/0, 7: E	5/0, 8: F	6, 3/1, 1: G	8: H	10: J
12500	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9
16000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9
20000	1Am/M4	P6, T6	P7, T7	P8, T8	T8	TA

NOVA



Elektroseilzug
Electric wire rope hoist

TROLLEY; DOUBLE GIRDER, MEDIUM, 2x6 ROPE FALLS

Hoist type:
NE26M...

SWF
KRANTECHNIK

SI - 50Hz

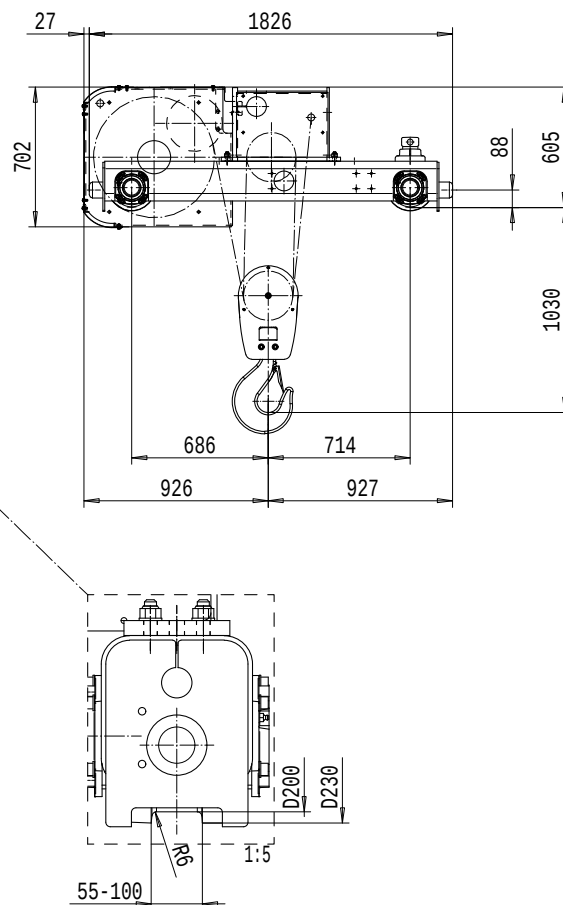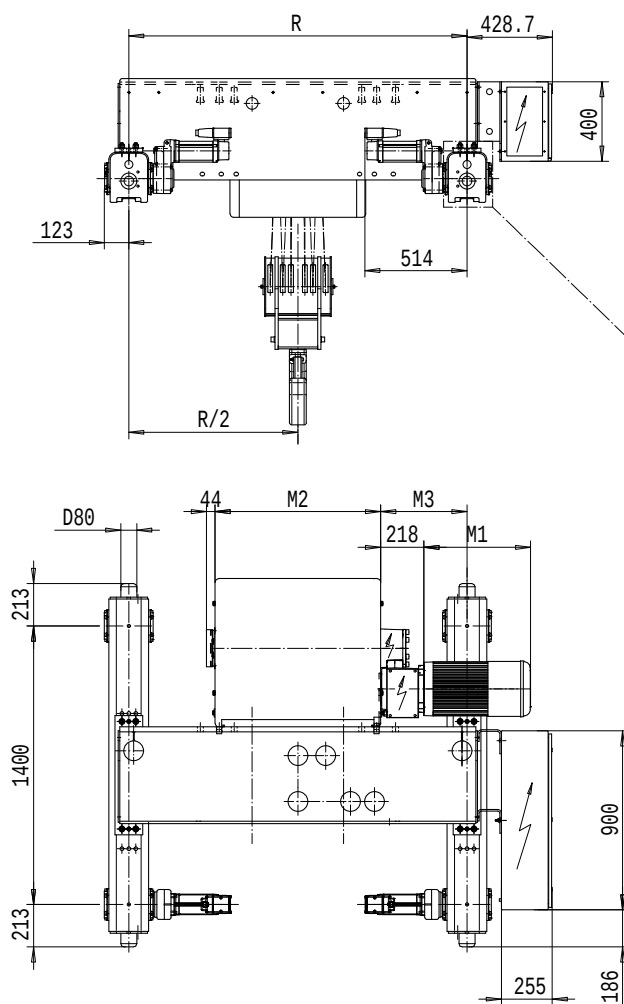

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL	Length	M2	M3	min R-max R	Weight
(m)	code	(mm)	(mm)	(mm)	(kg)
5,5	E	682	359	1400-2400	2060
7,5	F	832	434	1700-2400	2170
10	G	1022	489	2000-2700	2230
13	H	1272	364	2000-3100	2390
17,5	J	1622	389	2400-3400	2590
21,5	K	1922	389	2700-4200	2820
26	L	2272	414	3100-4200	3050
29	M	2522	439	3400-4200	3230
33	N	2822	489	3800-4200	3490




Note:

Min R with service platform

Standard rail gauges: 1400, 1700, 2000, 2400, 2700, 3100, 3400, 3800 and 4200

M3 and weight calculated with the min R

Load	Class	Hoisting motor					
(kg)	Fem/ISO	Hoisting speed (m/min): Gear code					
	2,5/0,4: E	3,2/0,5: F	4/0,7: G	5: H	6,3: J		
20000	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9	
25000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9	
30000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA	

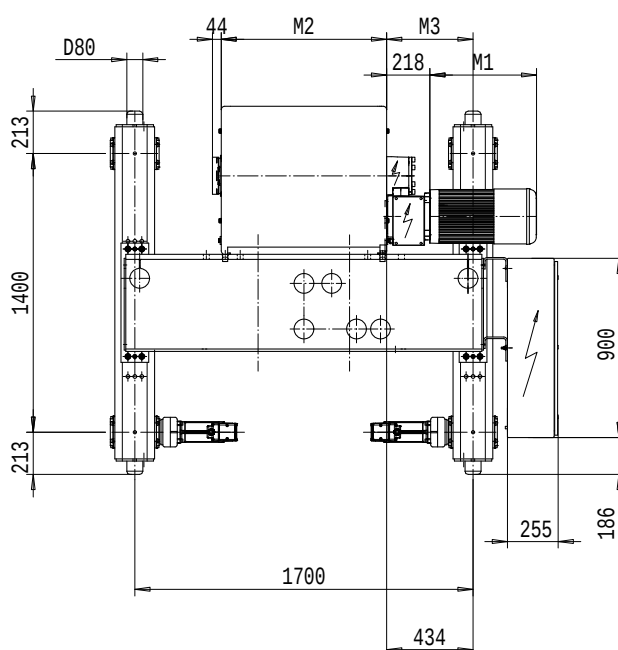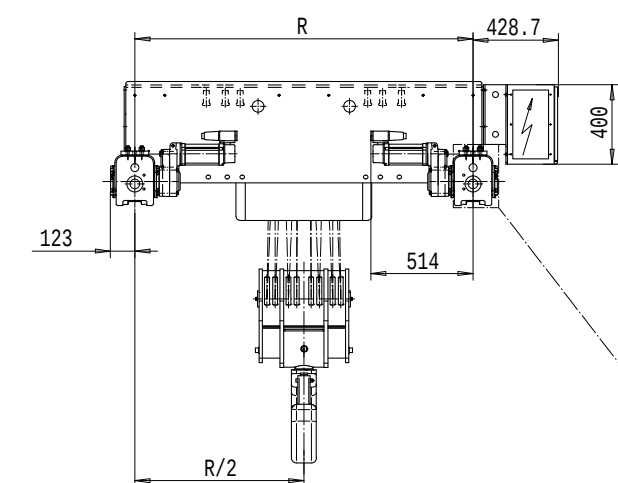

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL (m)	Length code	M2 (mm)	M3 (mm)	min R-max R (mm)	Weight (kg)
5,5	F	832	434	1700-2400	2190
7,5	G	1022	489	2000-2700	2250
9,5	H	1272	364	2000-3100	2410
13	J	1622	389	2400-3400	2610
16	K	1922	389	2700-4200	2840
19,5	L	2272	414	3100-4200	3070
21,5	M	2522	439	3400-4200	3250
24.5	N	2822	489	3800-4200	3510

Note:

Min R with service platform

Standard rail gauges: 1400, 1700, 2000, 2400, 2700, 3100, 3400, 3800 and 4200

M3 and weight calculated with the min R






Load (kg)	Class	Hoisting motor					
	Fem/ISO	Hoisting speed (m/min): Gear code					
		2/0, 3: E	2,5/0, 4: F	3,2/0, 5: G	3, 2: G	4: H	5: J
32000	2m/M5	P6, T6	P7, T7		T8	T9	TA
40000	1Am/M4	P6, T6	P7, T7	P8, T8		T9	TA

HOIST; MACHINERY HOIST, 1 ROPE FALLS

SI-50Hz

Hoist type:

NEM1V...

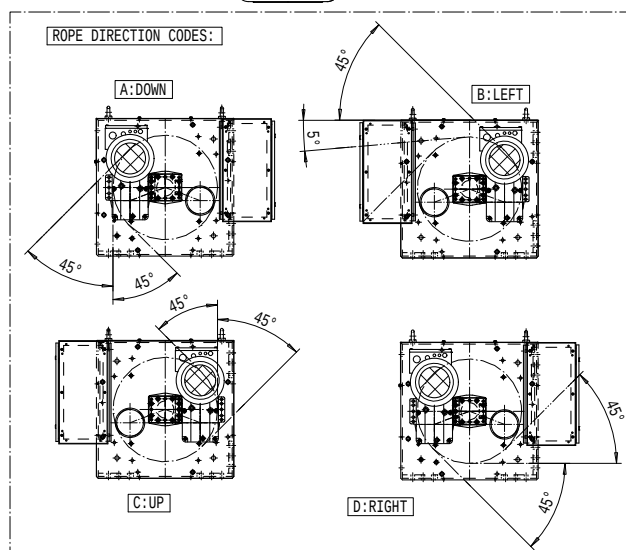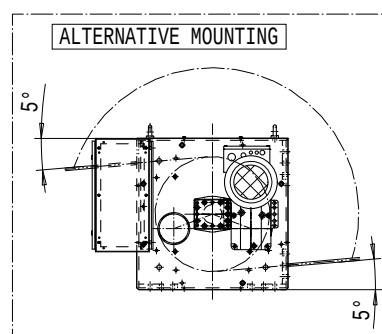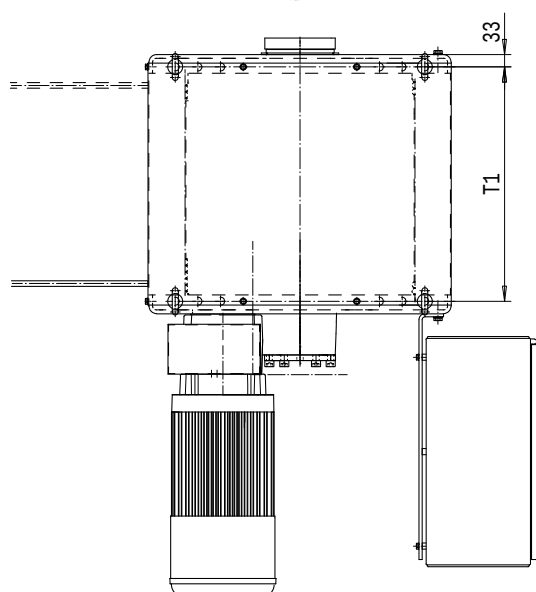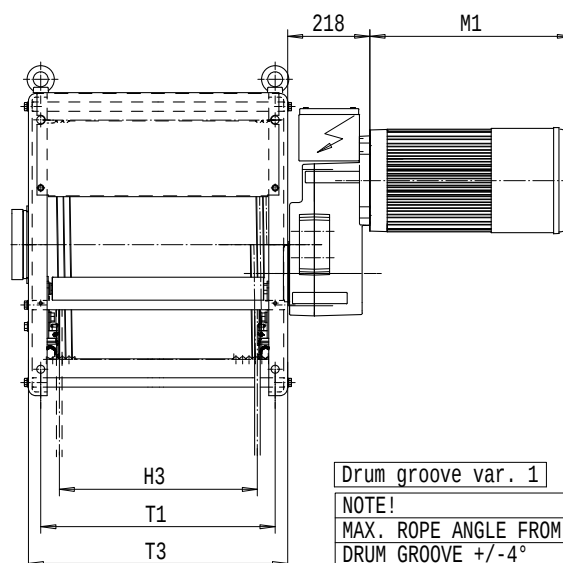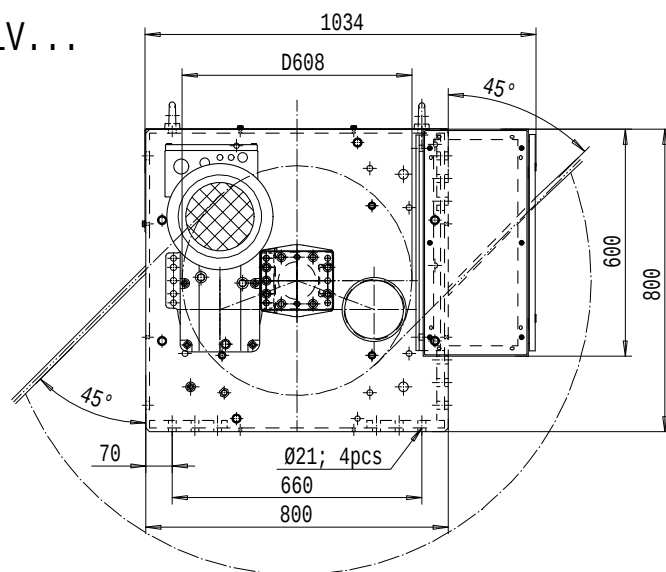

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL	Length	H3	T1	T3	Weight
(m)	code	(mm)	(mm)	(mm)	(kg)
32	C	304	400	466	600
43	D	404	500	566	630
56,5	E	524	620	686	660
73	F	674	770	836	700
94,5	G	864	960	1026	740
122,5	H	1114	1210	1276	810
161,5	J	1464	1560	1626	900
195	K	1764	1860	1926	980


Load	Class	Hoisting motor
(kg)	Fem/ISO	Hoisting speed (m/min): Gear code
	16/2,7: E	20/3,3: F
		25/4,2: G
		32: H
		40: J
3200	3m/M6	P6, T6
4000	2m/M5	P6, T6
5000	1Am/M4	P6, T6

HOIST; MACHINERY HOIST, 2 ROPE FALLS

Hoist type:



SI-50Hz

NEM2V...

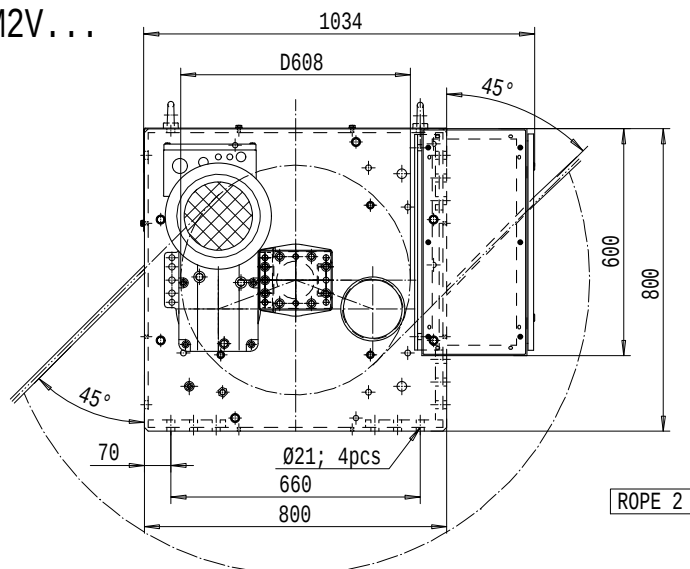


LEAVING ANGLE FOR ROPE 1

NOTE!
ANGLE OF ROPE 2 CAN VARIATE 0°...360°.

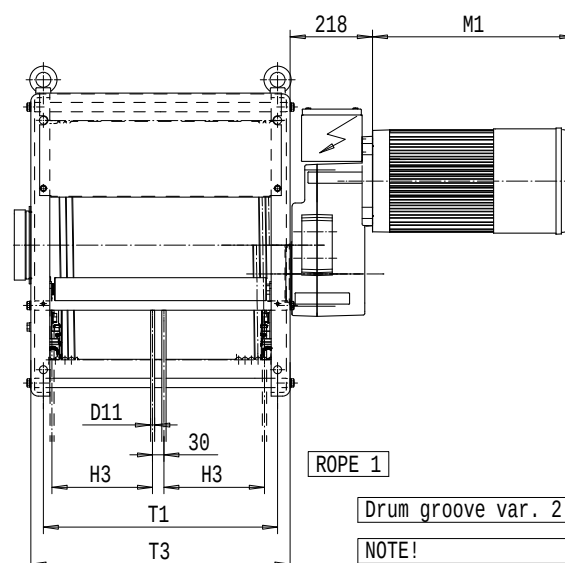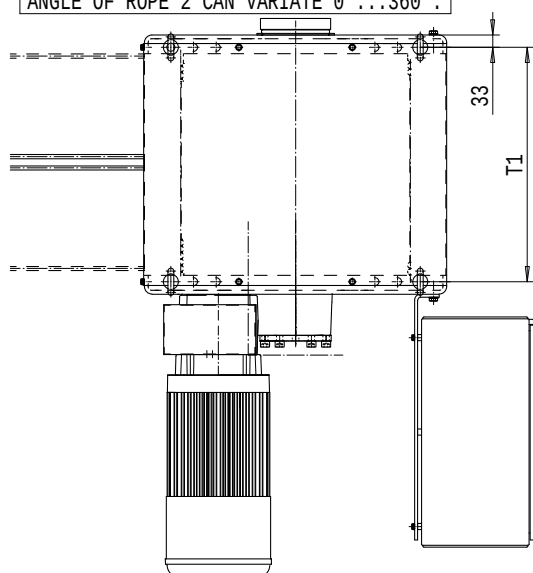


Drum groove var. 2

NOTE!
MAX. ROPE ANGLE FROM
DRUM GROOVE +/-4°

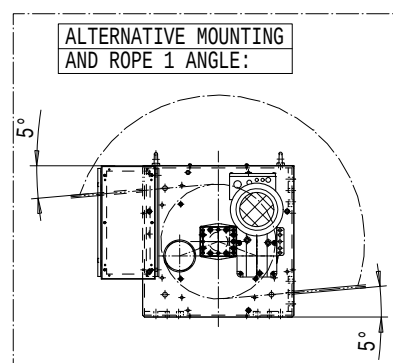

Motor	P6, T6, T7, T8, T9	P7, TA	P8
M1 (mm)	536	576	711

HOL (m)	Length code	H3 (mm)	T1 (mm)	T3 (mm)	Weight (kg)
37	E	264	620	686	660
48,5	F	339	770	836	700
63	G	434	960	1026	740
82	H	559	1210	1276	810
108,5	J	734	1560	1626	900
131,5	K	884	1860	1926	980
158,5	L	1059	2210	2276	1070
177,5	M	1184	2460	2526	1140
200,5	N	1334	2760	2826	1220

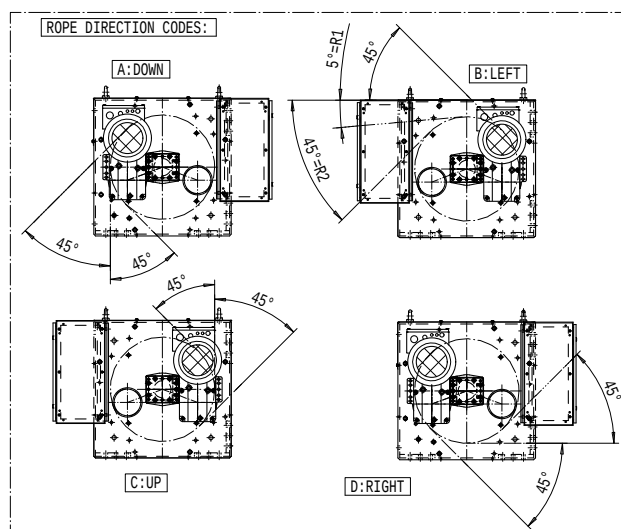

Load (kg)	Class Fem/ISO	Hoisting motor				
		Hoisting speed (m/min): Gear code				
		16/2,7: E	20/3,3: F	25/4,2: G	32: H	40: J
3200	3m/M6	P6, T6	P6, T6	P7, T7	T8	T9
4000	2m/M5	P6, T6	P6, T6	P7, T7	T8	T9
5000	1Am/M4	P6, T6	P7, T7	P8, T8	T9	TA