

Dimension Sheets
Electric Wire Rope Hoist NOVA

1. NOVA NB

2. NOVA NC

3. NOVA ND

4. NOVA NE

5. NOVA NF

PROD_REF	HOIST_TYPE	REEVING	DRAWING_NR
ND-F-02	HOIST; FIXED	2 ROPE FALLS	D002111-A
ND-F-04	HOIST; FIXED	4 ROPE FALLS	D002116-A
ND-F-06	HOIST; FIXED	6-ROPE FALLS	D002123-A
ND-F-08	HOIST; FIXED	8 ROPE FALLS	D002126-A
ND-F-22	HOIST; FIXED	2x2 ROPE FALLS	D002129-A
ND-F-24	HOIST; FIXED	2x4 ROPE FALLS	D002130-A
ND-F-26	HOIST; FIXED	2x6 ROPE FALLS	D002131-A
ND-F-28	HOIST; FIXED	2x8 ROPE FALLS	D002133-A
ND-L-02	TROLLEY; LOW HEADROOM	2 ROPE FALLS	D002112-A
ND-L-04	TROLLEY; LOW HEADROOM	4 ROPE FALLS	D002117-A
ND-L-04-X	TROLLEY; LOW HEADROOM	4 ROPE FALLS, 12500 kg	D002118-A
ND-N-02	TROLLEY; NORMAL HEADROOM	2 ROPE FALLS	D002114-A
ND-N-04	TROLLEY; NORMAL HEADROOM	4 ROPE FALLS	D002120-A
ND-N-06	TROLLEY; NORMAL HEADROOM	6 ROPE FALLS	D002125-A
ND-N-08	TROLLEY; NORMAL HEADROOM	8 ROPE FALLS	D002128-A
ND-H-02	TROLLEY; DOUBLE GIRDER	HIGH, 2 ROPE FALLS	D002238-A
ND-H-04	TROLLEY; DOUBLE GIRDER	HIGH, 4 ROPE FALLS	D002240-A
ND-H-06	TROLLEY; DOUBLE GIRDER	HIGH, 6-ROPE FALLS	D002241-A
ND-H-08	TROLLEY; DOUBLE GIRDER	HIGH, 8-ROPE FALLS	D002242-A
ND-H-22	TROLLEY; DOUBLE GIRDER	HIGH, 2x2 ROPE FALLS	D002243-A
ND-H-24	TROLLEY; DOUBLE GIRDER	HIGH, 2x4 ROPE FALLS	D002244-A
ND-H-26	TROLLEY; DOUBLE GIRDER	HIGH, 2x6 ROPE FALLS	D002245-A
ND-H-28	TROLLEY; DOUBLE GIRDER	HIGH, 2x8 ROPE FALLS	D002246-A
ND-M-02	TROLLEY; DOUBLE GIRDER	MEDIUM, 2 ROPE FALLS	D002113-A
ND-M-04	TROLLEY; DOUBLE GIRDER	MEDIUM, 4 ROPE FALLS	D002119-A
ND-M-06	TROLLEY; DOUBLE GIRDER	MEDIUM, 6 ROPE FALLS	D002124-A
ND-M-08	TROLLEY; DOUBLE GIRDER	MEDIUM, 8 ROPE FALLS	D002127-A
ND-M-22	TROLLEY; DOUBLE GIRDER	MEDIUM, 2x2 ROPE FALLS	D002134-A
ND-M-24	TROLLEY; DOUBLE GIRDER	MEDIUM, 2x4 ROPE FALLS	D002135-A
ND-M-26	TROLLEY; DOUBLE GIRDER	MEDIUM, 2x6 ROPE FALLS	D002132-A
ND-M-28	TROLLEY; DOUBLE GIRDER	MEDIUM, 2x8 ROPE FALLS	D002136-A
ND-W-02	TROLLEY; DOUBLE GIRDER	LOW, 2 ROPE FALLS	D002115-A
ND-W-04	TROLLEY; DOUBLE GIRDER	LOW, 4 ROPE FALLS	D002122-A
ND-V-M1	HOIST; MACHINERY HOIST	1 ROPE FALLS	D002138-A
ND-V-M2	HOIST; MACHINERY HOIST	2 ROPE FALLS, SAME DIRECTION	D002137-A
ND-V-M2	HOIST; MACHINERY HOIST	2 ROPE FALLS, OPPOSITE DIRECT	D002139-A

NOVA


Elektroseilzug
Electric wire rope hoist

HOIST; FIXED, 2 ROPE FALLS

Hoist type:
ND02F...

SWF
KRANTECHNIK

SI - 50Hz

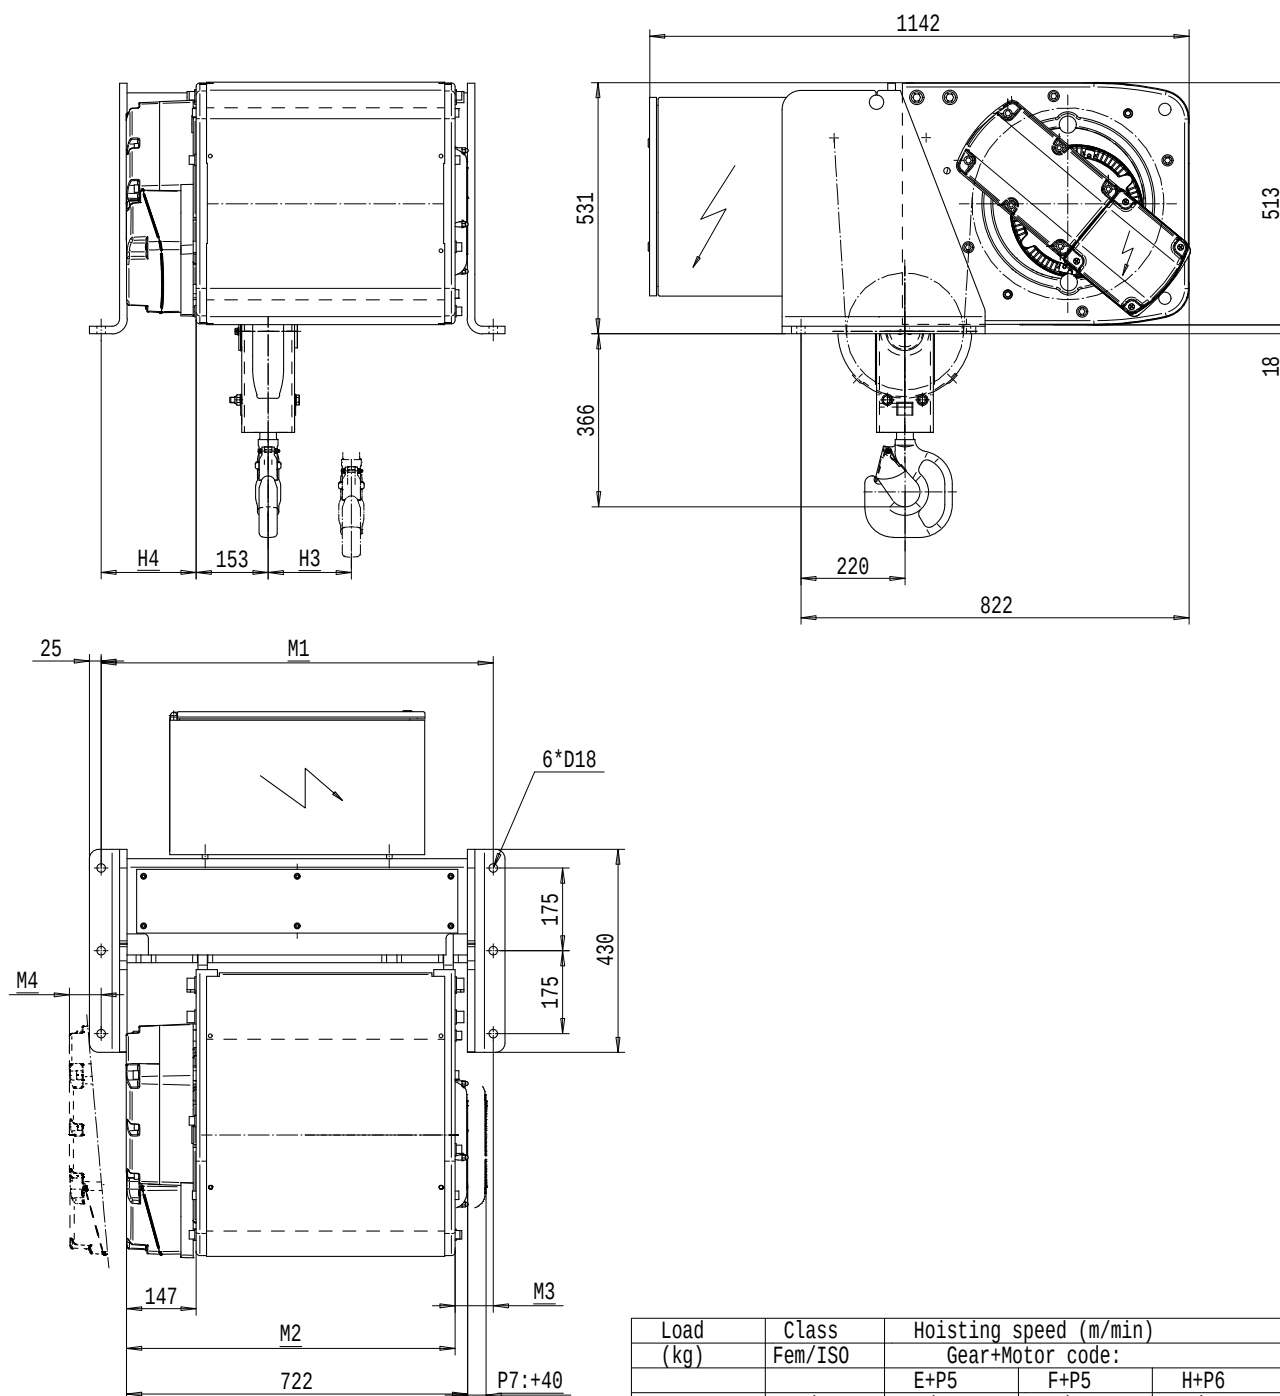

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)			
		Gear+Motor code:			
		E+P5	F+P5	H+P6	J+P7
4000	3m/M6	8/1,3	10/1,7	16/2,7	20/3,3
5000	2m/M5	8/1,3	10/1,7	16/2,7	20/3,3
6300	1Am/M4	8/1,3	-	-	-
+ weight (kg):		-	-	30	40

HOL	Length	M1	M2	M3	M4	H3	H4	Weight
(m)	code	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
18	D	830	697	81	-53	176	201	430
24	E	830	817	81	67	235	81	445
32	F	1170	967	271	67	310	81	460
40	G	1170	1157	81	67	405	81	480

NOVA




Elektroseilzug
Electric wire rope hoist

HOIST; FIXED, 4 ROPE FALLS

Hoist type:
ND04F...

SWF
KRANTECHNIK

SI-50Hz

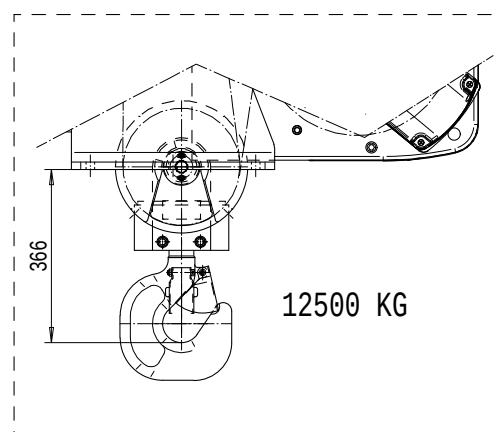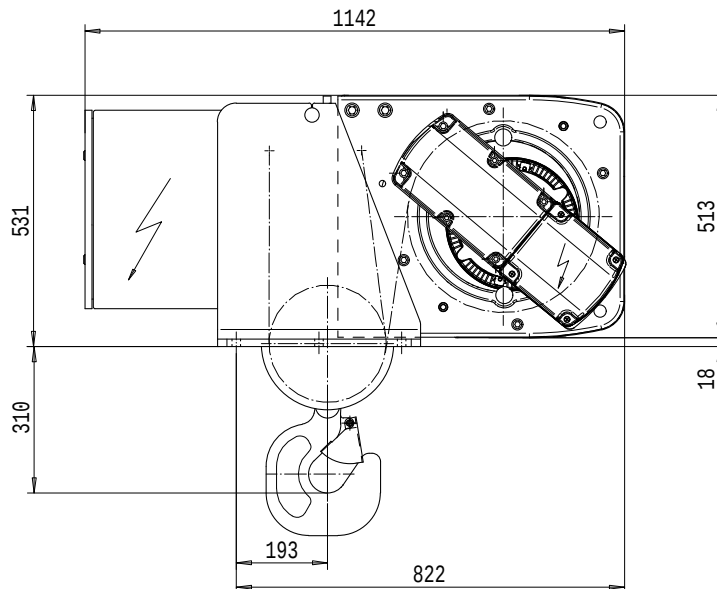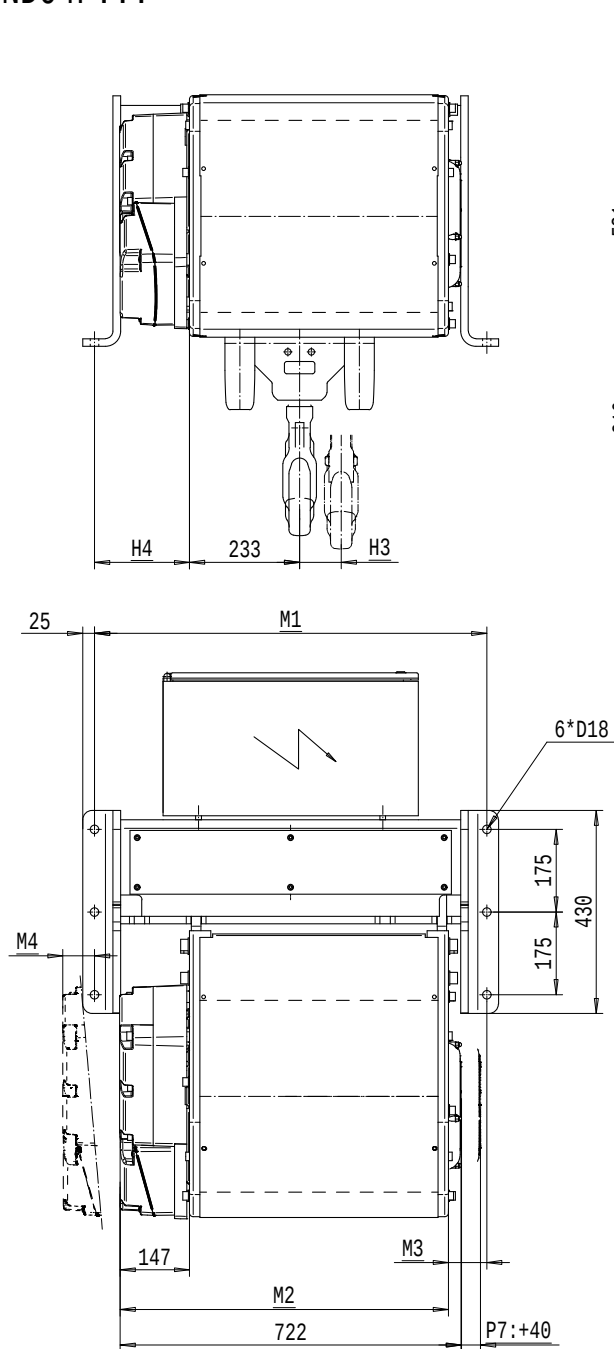

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)			
		Gear+Motor code:			
		E+P5	F+P5	H+P6	J+P7
6300	3m/M6	4/0,7	5/0,8	8/1,3	10/1,7
8000	3m/M6	4/0,7	5/0,8	8/1,3	10/1,7
10000	2m/M5	4/0,7	5/0,8	8/1,3	10/1,7
12500	1Am/M4	4/0,7	-	-	-
+ weight (kg):		-	-	30	40

HOL (m)	Length code	M1 (mm)	M2 (mm)	M3 (mm)	M4 (mm)	H3 (mm)	H4 (mm)	Weight (kg)
9	D	830	697	81	-53	88	201	445
12	E	830	817	81	67	118	81	460
16	F	1170	967	271	67	156	81	480
20	G	1170	1157	81	67	204	81	500

NOVA



Elektroseilzug
Electric wire rope hoist

HOIST; FIXED, 6-ROPE FALLS

Hoist type:
ND06F...

SWF
KRANTECHNIK

SI-50Hz

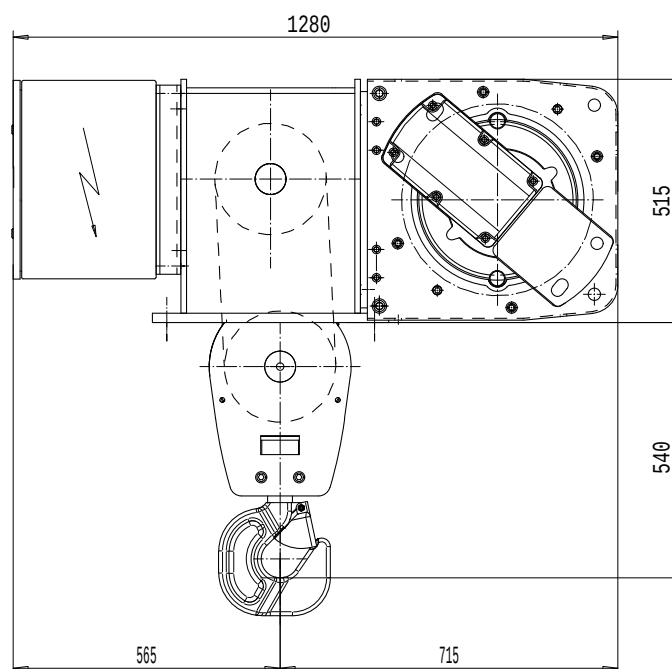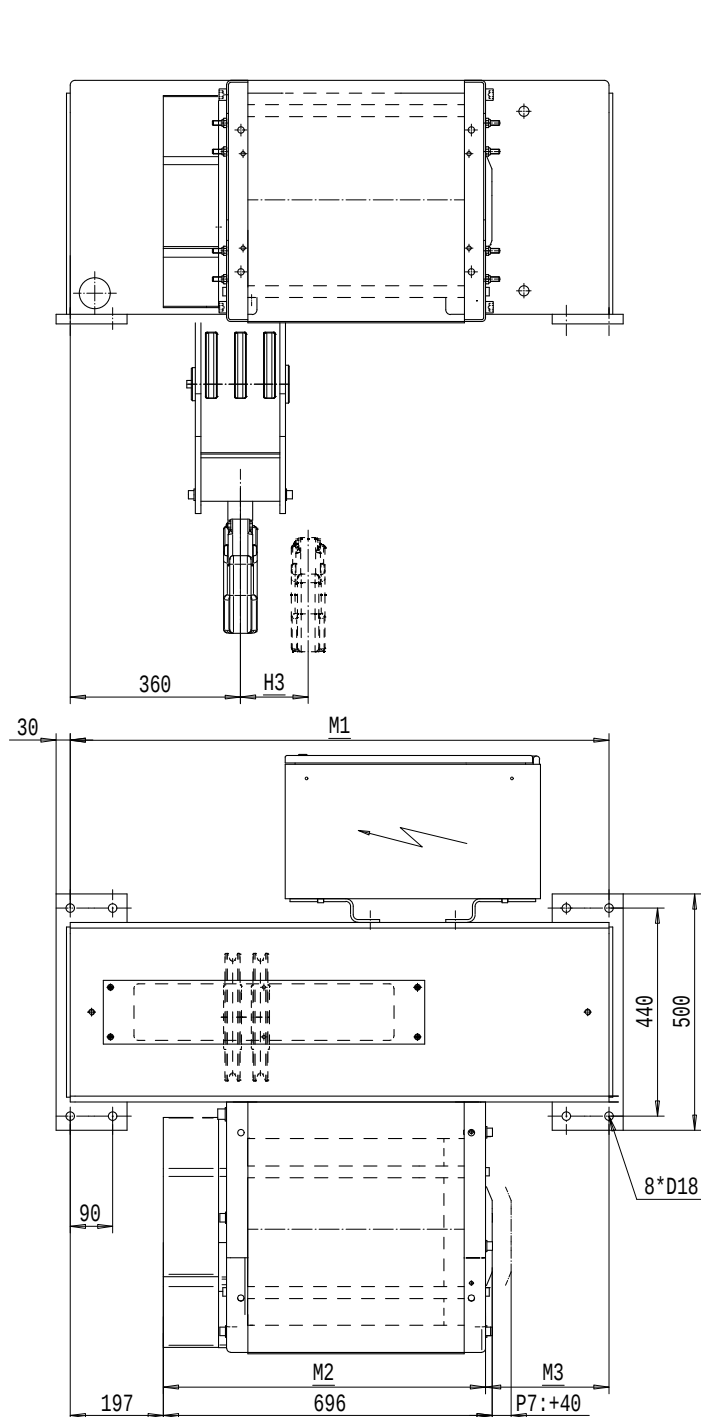

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
12000	3m/M6	3,2/0,5	5/0,8	6,3/1,1
15000	2m/M5	3,2/0,5	5/0,8	6,3/1,1
+ weight (kg):		-	30	40

HOL (m)	Length code	M1 (mm)	M2 (mm)	M3 (mm)	H3 (mm)	Weight (kg)
6	D	1140	682	261	53	620
8	E	1140	802	141	78	630
10	F	1480	952	291	98	685
13	G	1480	1142	101	132	700

NOVA


Elektroseilzug
Electric wire rope hoist

HOIST; FIXED, 8 ROPE FALLS

Hoist type:
ND08F...

SWF
KRANTECHNIK

SI-50Hz

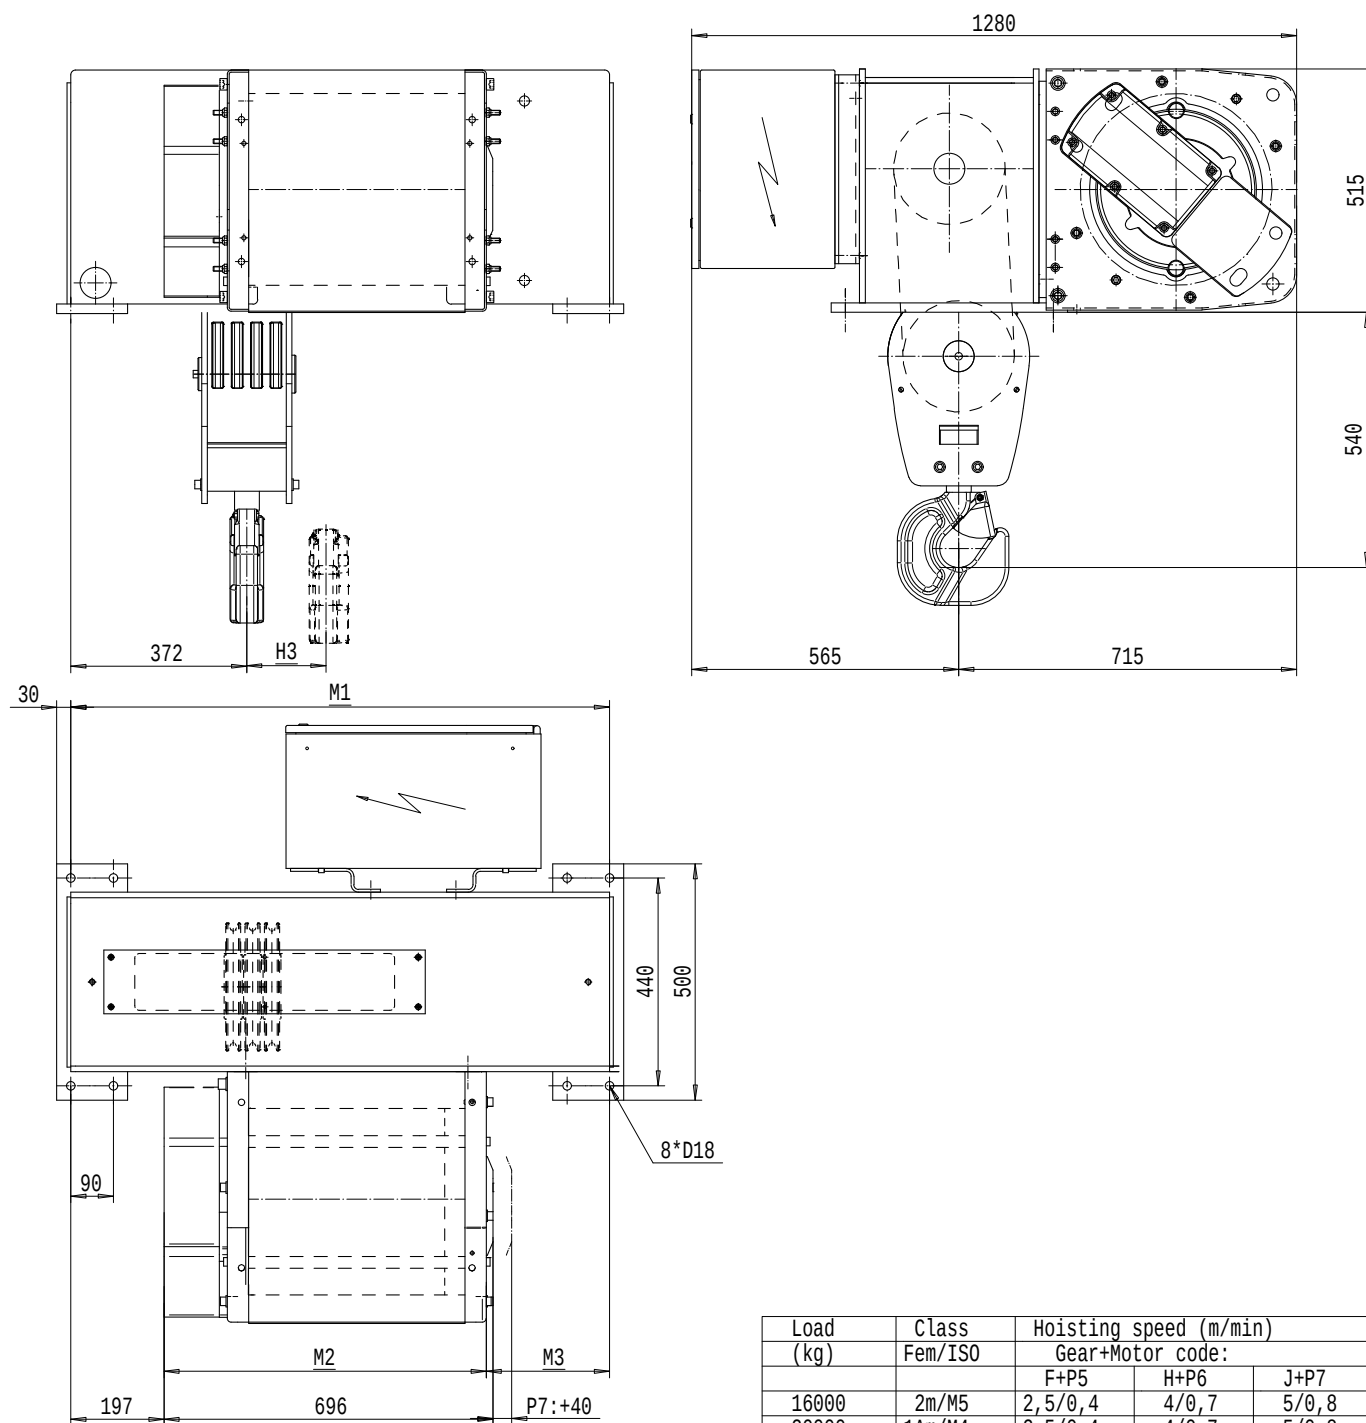

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
16000	2m/M5	2,5/0,4	4/0,7	5/0,8
20000	1Am/M4	2,5/0,4	4/0,7	5/0,8
+ weight (kg):		-	30	40

HOL (m)	Length code	M1 (mm)	M2 (mm)	M3 (mm)	H3 (mm)	Weight (kg)
4,5	D	1140	682	261	44	625
6	E	1140	802	141	53	635
8	F	1480	952	291	76	650
10	G	1480	1142	101	98	670

NOVA


Elektroseilzug
Electric wire rope hoist

HOIST; FIXED, 2x2 ROPE FALLS

Hoist type:
ND22F...

SWF
KRANTECHNIK

SI - 50Hz

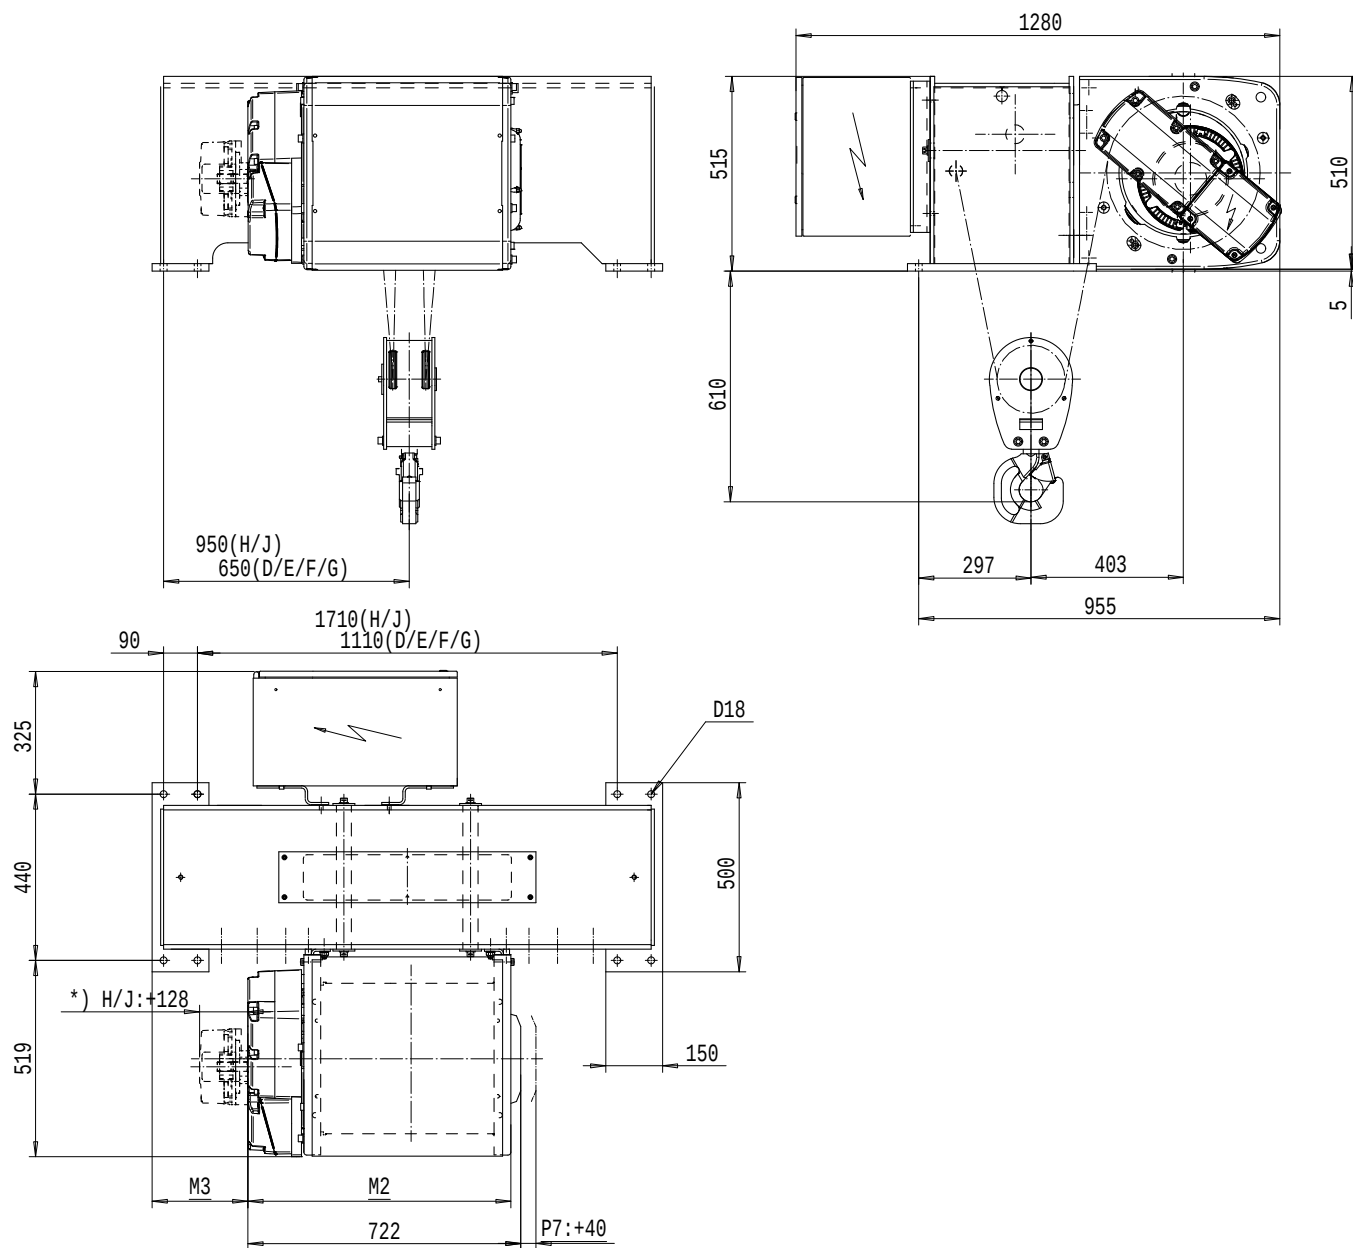

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
4000	3m/M6	10/1,7	16/2,7	20/3,3
5000	2m/M5	10/1,7	16/2,7	20/3,3
+ weight (kg):		-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	Weight (kg)
8,5	D	696	253	380
13	E	816	193	440
18	F	966	118	450
25	G	1156	23	490
33,5	H	1406	198	605
46	J	1756	23	1000

Note:

*) Gear brake as standard brake for drum lengths H and J

NOVA


Elektroseilzug
Electric wire rope hoist

HOIST; FIXED, 2x4 ROPE FALLS

Hoist type:
ND24F...

SWF
KRANTECHNIK

SI - 50Hz

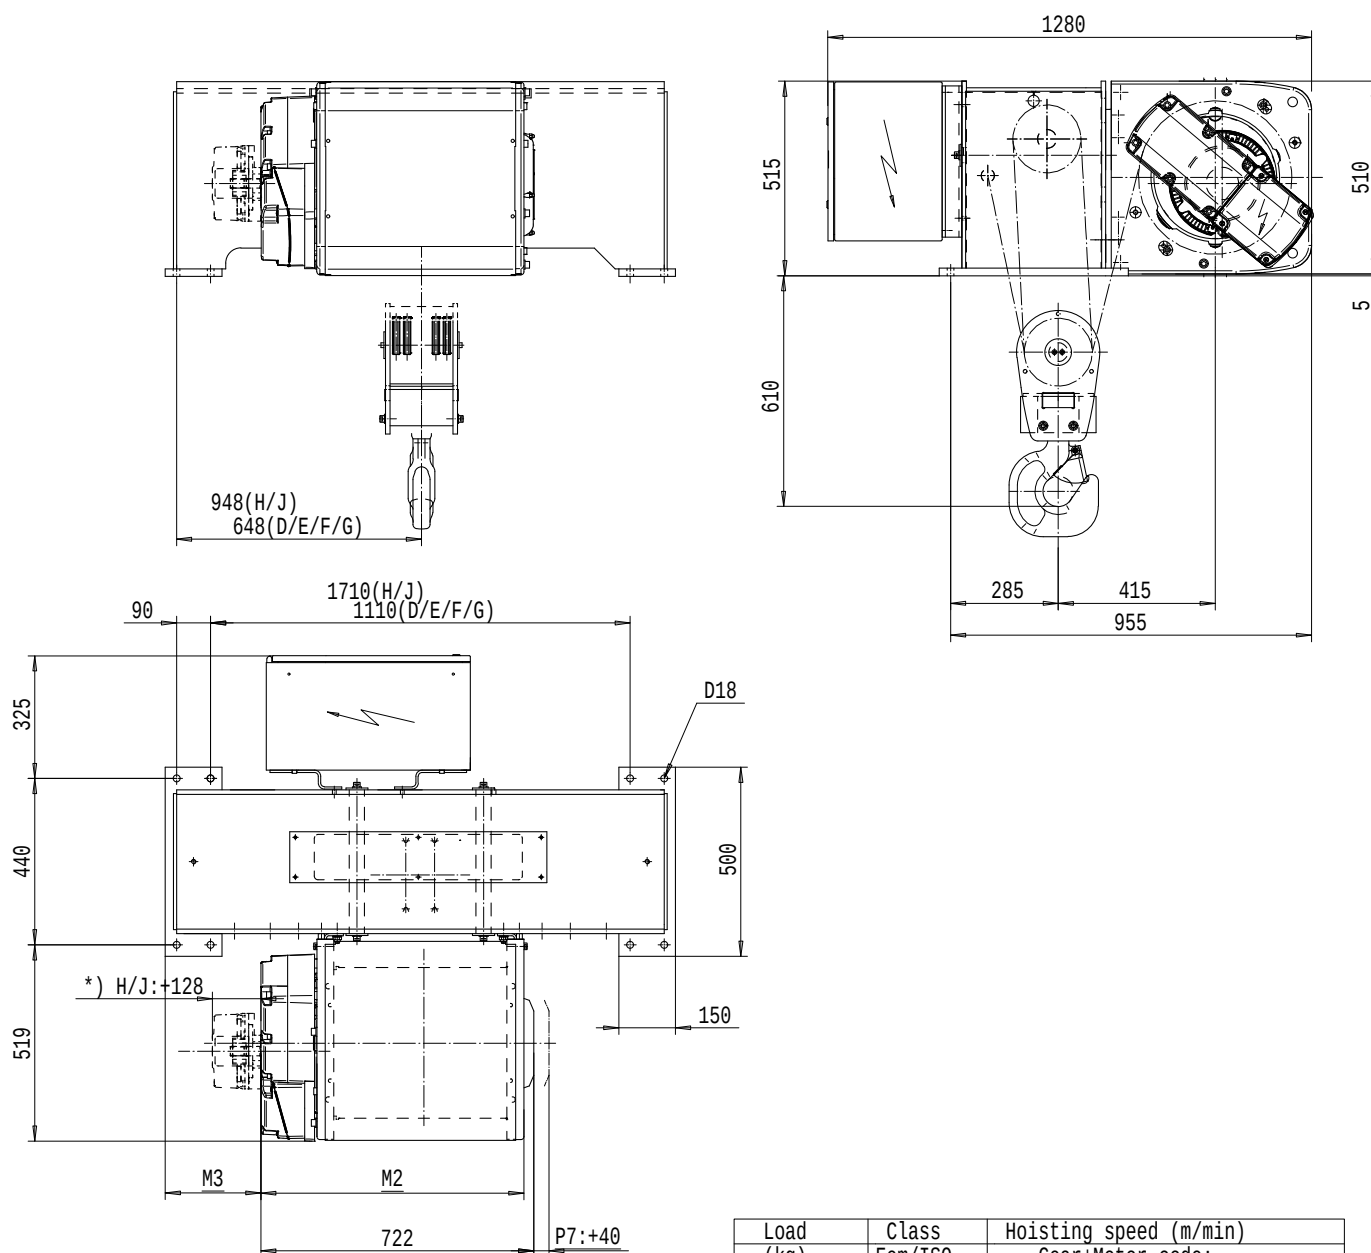

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
8000	3m/M6	5/0,8	8/1,3	10/1,7
10000	2m/M5	5/0,8	8/1,3	10/1,7
+ weight (kg):		-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	Weight (kg)
4	D	696	253	440
6,5	E	816	193	500
9	F	966	118	530
12,5	G	1156	23	570
16,5	H	1406	198	685
23	J	1756	23	1000

Note:

*) Gear brake as standard brake for drum lengths H and J

NOVA


Elektroseilzug
Electric wire rope hoist

HOIST; FIXED, 2X6 ROPE FALLS

Hoist type:
ND26F...

SWF
KRANTECHNIK

SI - 50Hz

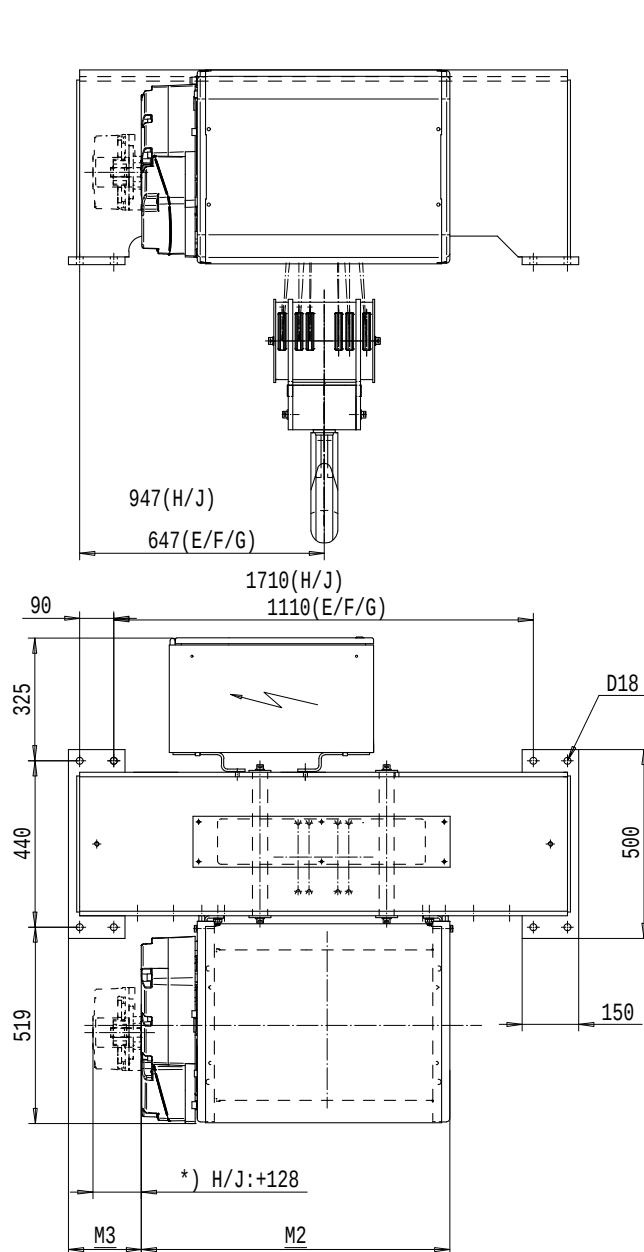

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
12000	3m/M6	3,2/0,5	5/0,8	6,3/1,1
15000	2m/M5	3,2/0,5	5/0,8	6,3/1,1
+ weight (kg):		-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	Weight (kg)
4	E	816	193	520
6	F	966	118	530
8	G	1156	23	590
11	H	1406	198	705
15	J	1756	23	1000

Note:

*) Gear brake as standard brake for drum lengths H and J

NOVA





Elektroseilzug
Electric wire rope hoist

TROLLEY: LOW HEADROOM, 2 ROPE FALLS

Hoist type:
ND02L...

SWF
KRANTECHNIK

SI-50Hz

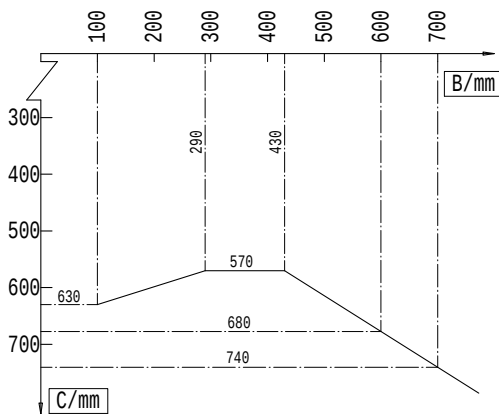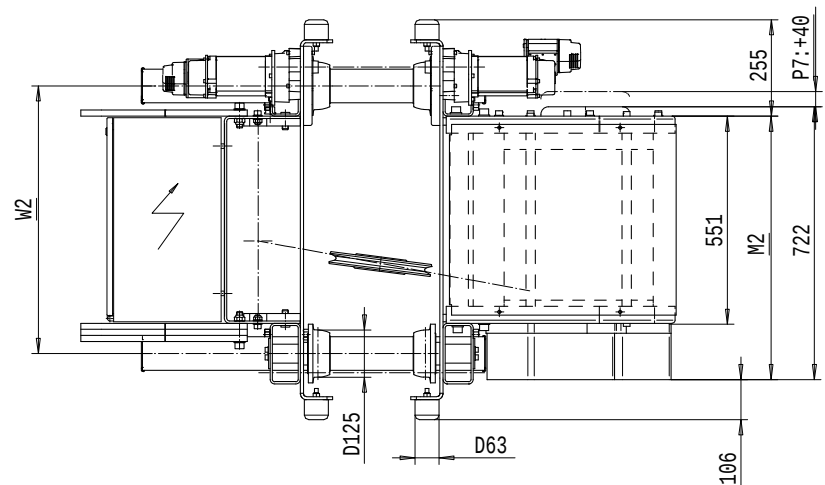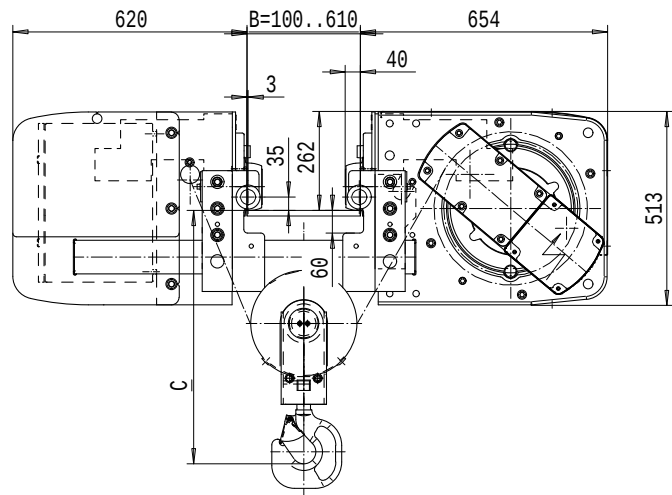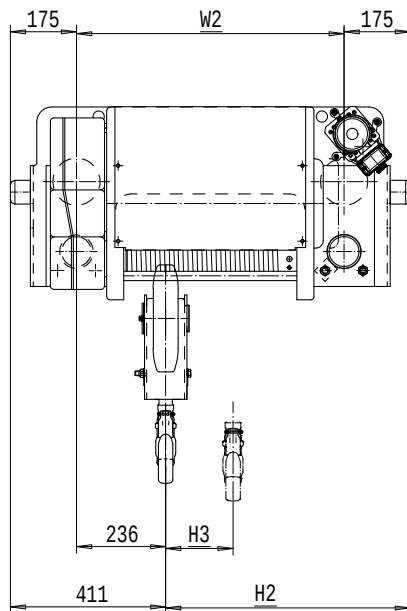

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)			
		Gear+Motor code:			
		E+P5	F+P5	H+P6	J+P7
4000	3m/M6	8/1,3	10/1,7	16/2,7	20/3,3
5000	2m/M5	8/1,3	10/1,7	16/2,7	20/3,3
6300	1Am/M4	8/1,3	-	-	-
+ weight (kg):		-	-	60	80

HOL (m)	Length code	M2 (mm)	H2 (mm)	H3 (mm)	W2 (mm)	Weight (kg)
18	D	697	647	176	708	595
24	E	817	767	235	828	640
32	F	967	917	309	978	690

NOVA





Elektroseilzug
Electric wire rope hoist

TROLLEY; LOW HEADROOM, 4 ROPE FALLS

Hoist type:
ND04L...

SWF
KRANTECHNIK

SI-50Hz

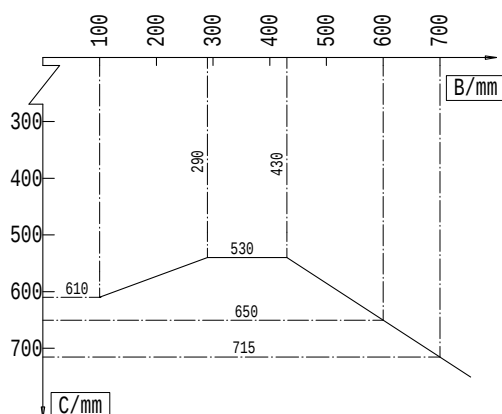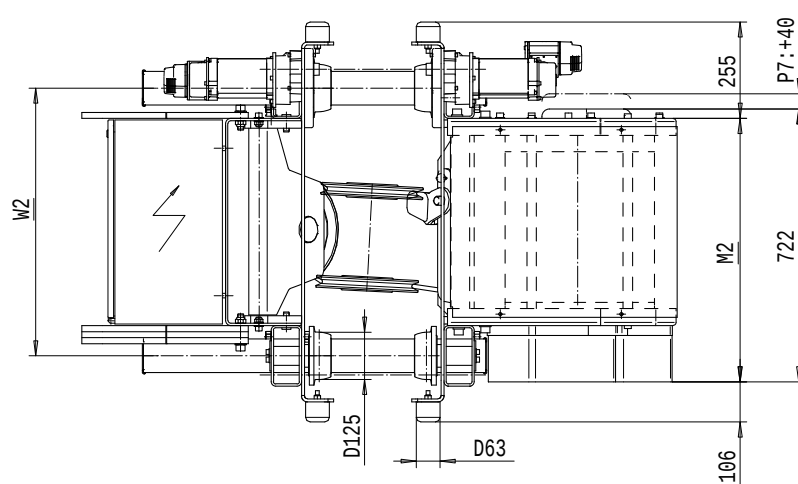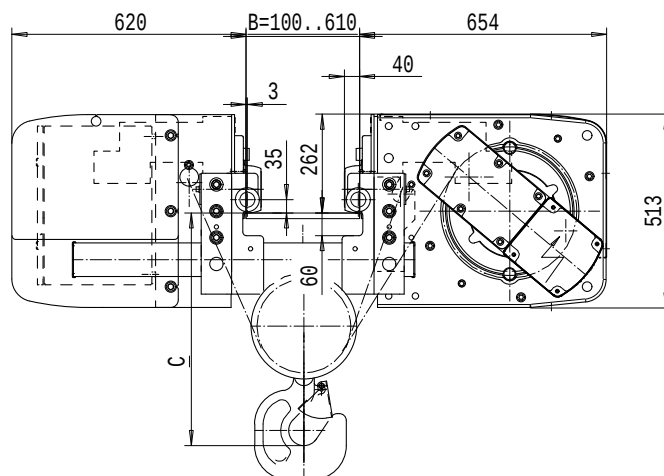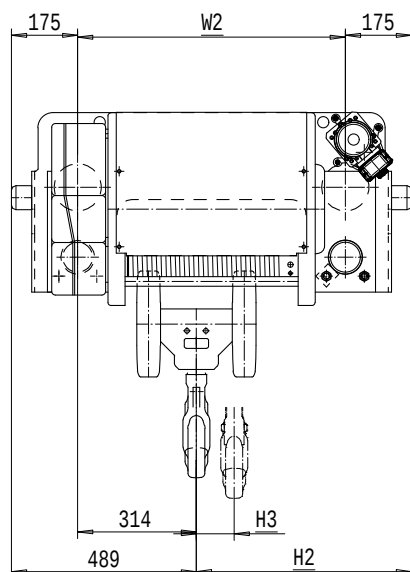

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)			
		Gear+Motor code:			
		E+P5	F+P5	H+P6	J+P7
6300	3m/M6	4/0,7	5/0,8	8/1,3	10/1,7
8000	3m/M6	4/0,7	5/0,8	8/1,3	10/1,7
10000	2m/M5	4/0,7	5/0,8	8/1,3	10/1,7
+ weight (kg):		-	-	60	80

HOL (m)	Length code	M2 (mm)	H2 (mm)	H3 (mm)	W2 (mm)	Weight (kg)
9	D	697	569	88	708	610
12	E	817	689	118	828	660
16	F	967	839	156	978	710

NOVA Elektroseilzug





Electric wire rope hoist

TROLLEY; LOW HEADROOM, 4 ROPE FALLS, 12500 kg

SWF
KRANTECHNIK

SI - 50Hz

Hoist type:
ND04L...

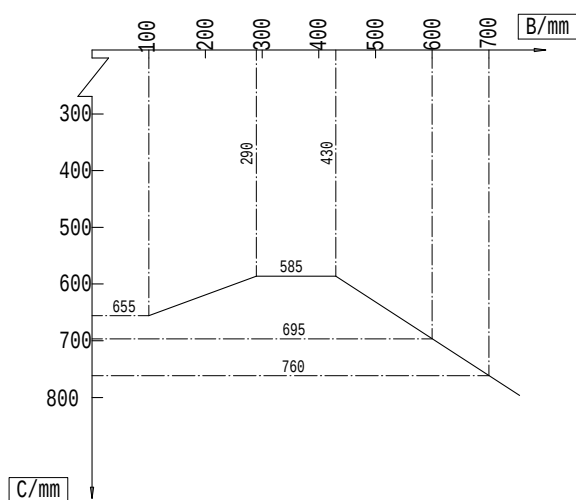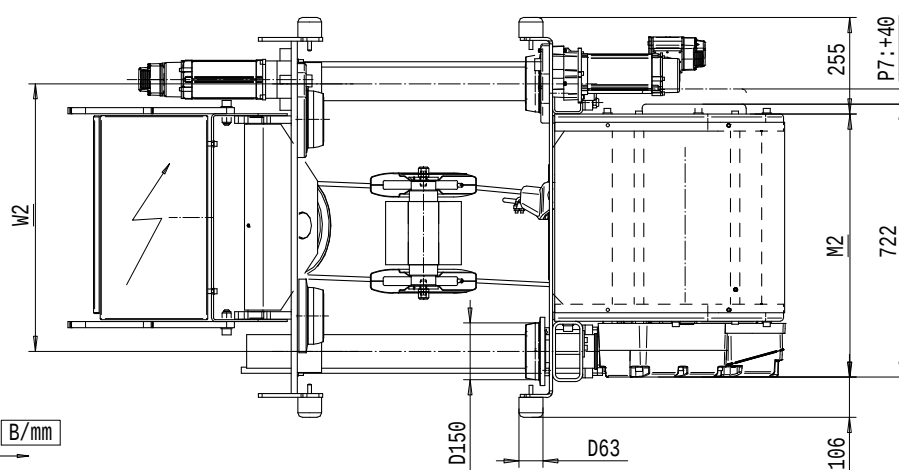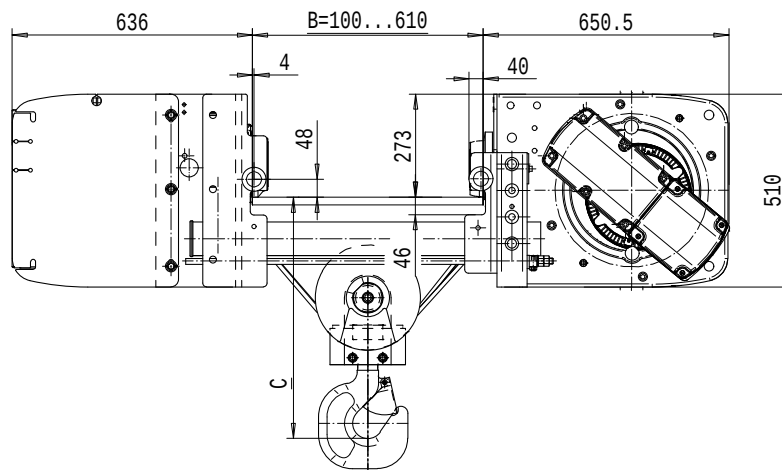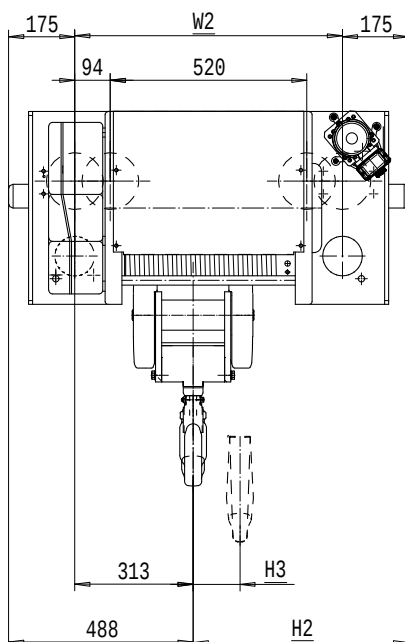

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)			
		Gear+Motor code:			
		E+P5	F+P5	H+P6	J+P7
12500	1Am/M4	4/0, 7	-	-	-

HOL (m)	Length code	M2 (mm)	H2 (mm)	H3 (mm)	w2 (mm)	Weight (kg)
9	D	697	569	88	708	610
12	E	817	689	118	828	660
16	F	967	839	156	978	710

NOVA Elektroseilzug


Electric wire rope hoist

TROLLEY; NORMAL HEADROOM, 2 ROPE FALLS

Hoist type:
ND02N...

SWF
KRANTECHNIK

SI-50Hz

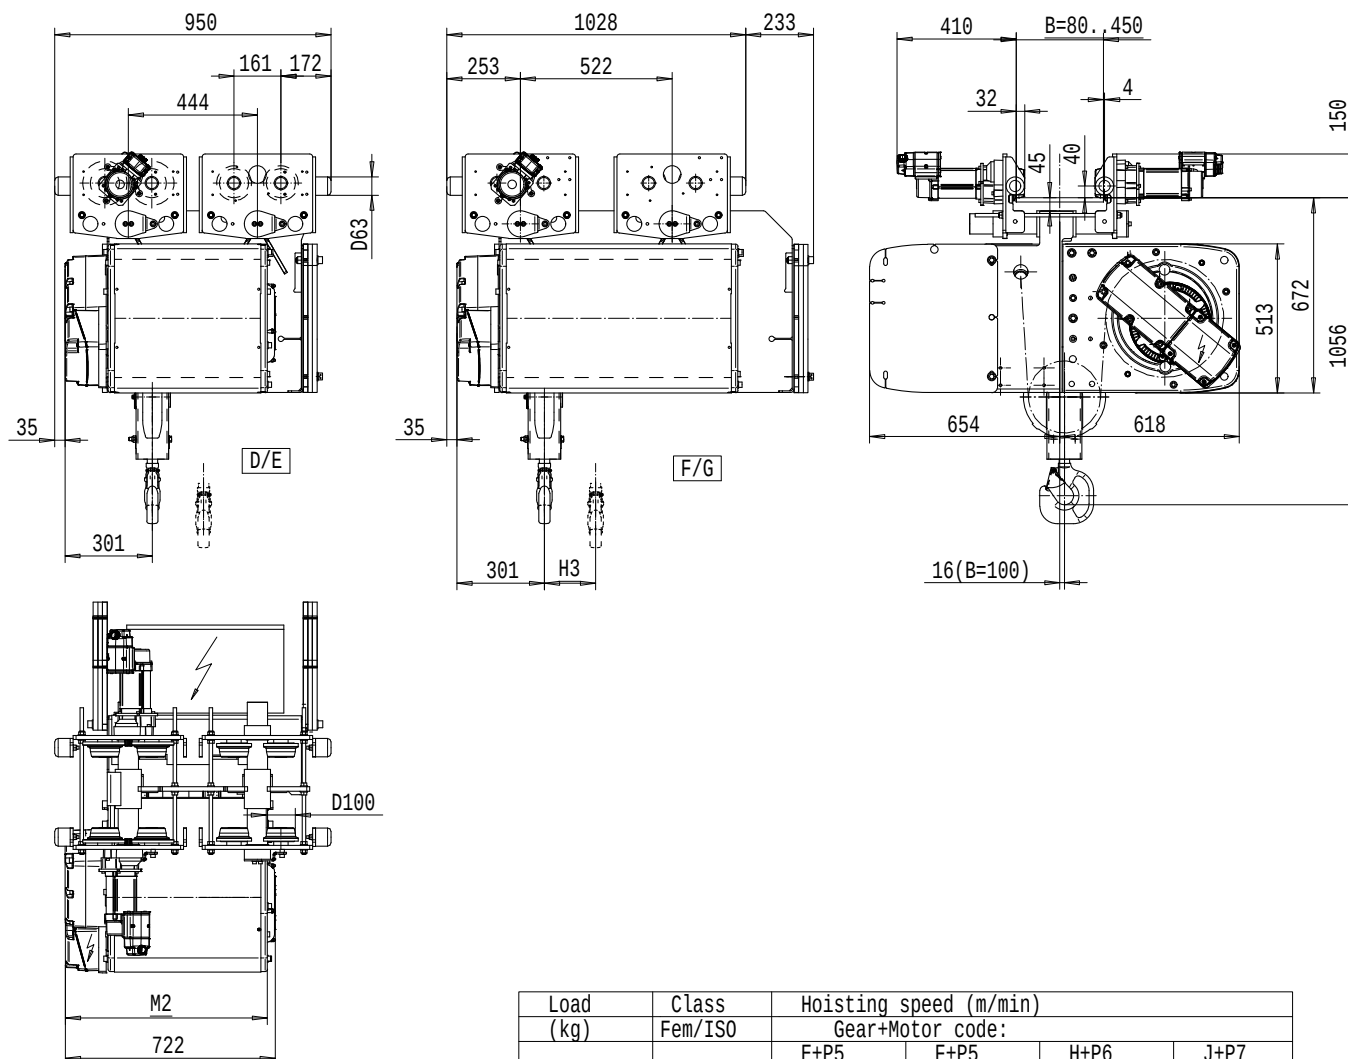

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)			
		Gear+Motor code:			
		E+P5	F+P5	H+P6	J+P7
4000	3m/M6	8/1,3	10/1,7	16/2,7	20/3,3
5000	2m/M5	8/1,3	10/1,7	16/2,7	20/3,3
6300	1Am/M4	8/1,3	-	-	-
+ weight (kg):		-	-	60	80

HOL (m)	Length code	M2 (mm)	H3 (mm)	Weight (kg)
18	D	697	176	555
24	E	817	235	605
32	F	967	309	660
40	G	1157	403	710

NOVA Elektroseilzug


Electric wire rope hoist

TROLLEY: NORMAL HEADROOM, 4 ROPE FALLS

Hoist type:
ND04N...

SWF
KRANTECHNIK

SI - 50Hz

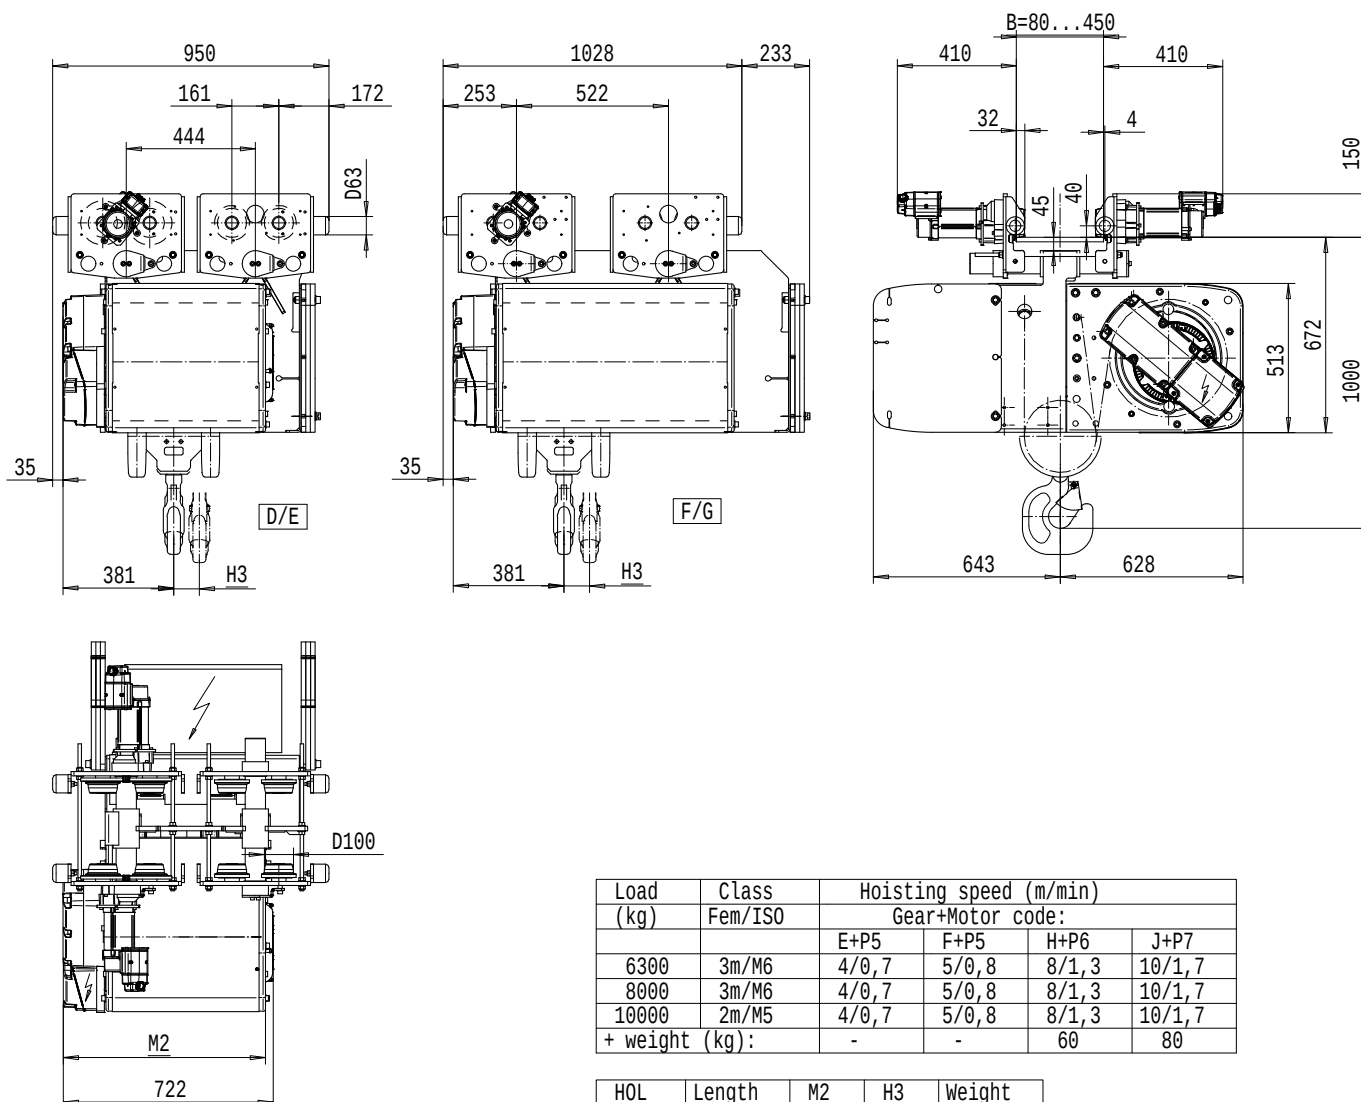

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)			
		Gear+Motor code:			
		E+P5	F+P5	H+P6	J+P7
6300	3m/M6	4/0,7	5/0,8	8/1,3	10/1,7
8000	3m/M6	4/0,7	5/0,8	8/1,3	10/1,7
10000	2m/M5	4/0,7	5/0,8	8/1,3	10/1,7
+ weight (kg):		-	-	60	80

HOL (m)	Length code	M2 (mm)	H3 (mm)	Weight (kg)
9	D	697	88	570
12	E	817	118	620
16	F	967	156	660
20	G	1157	204	700

NOVA


Elektroseilzug
Electric wire rope hoist

TROLLEY: NORMAL HEADROOM, 6 ROPE FALLS


Hoist type:
ND06N...

SWF
KRANTECHNIK



SI-50Hz

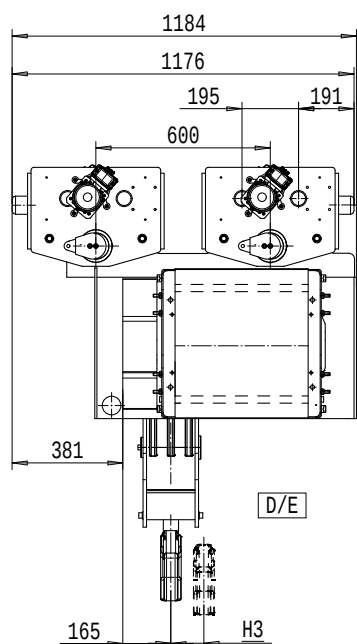

D/E

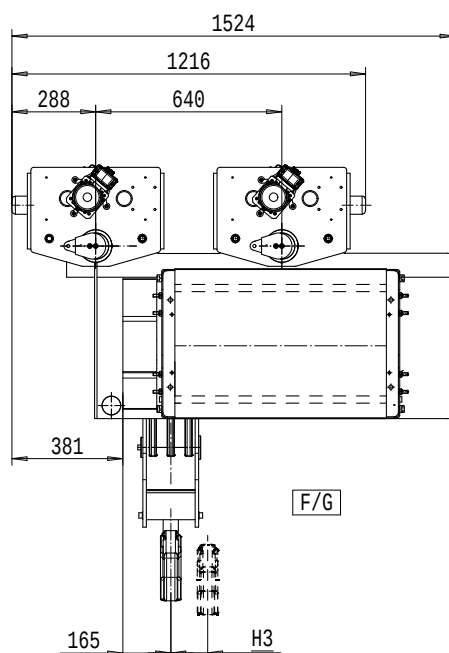

F/G

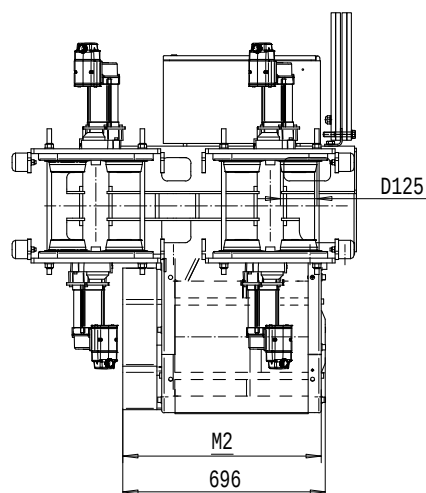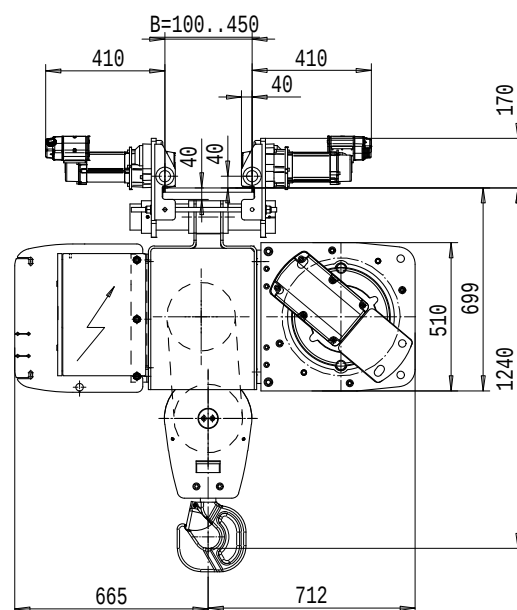

D125

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
12000	3m/M6	3,2/0,5	5/0,8	6,3/1,1
15000	2m/M5	3,2/0,5	5/0,8	6,3/1,1
+ weight (kg):		-	60	80

HOL (m)	Length code	M2 (mm)	H3 (mm)	Weight (kg)
6	D	682	53	803
8	E	802	78	820
10	F	952	98	895
13	G	1142	132	920

NOVA





Elektroseilzug
Electric wire rope hoist

TROLLEY: NORMAL HEADROOM, 8 ROPE FALLS

Hoist type:
ND08N...

SWF
KRANTECHNIK

SI-50Hz

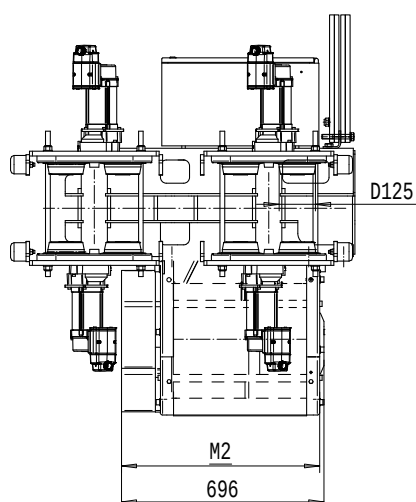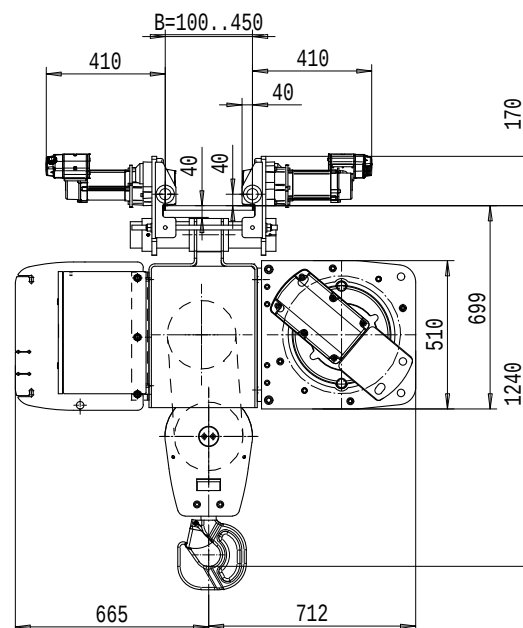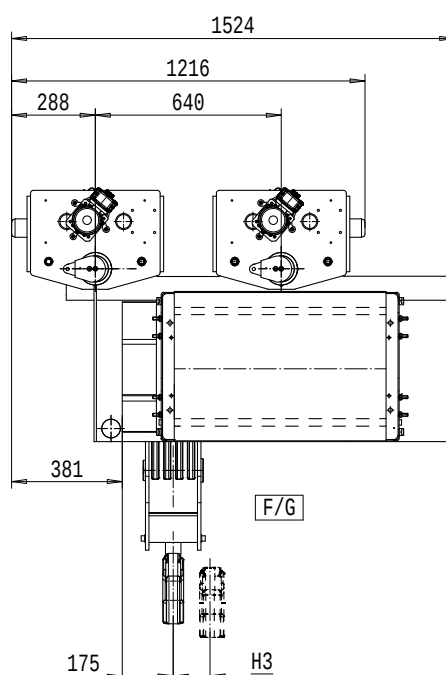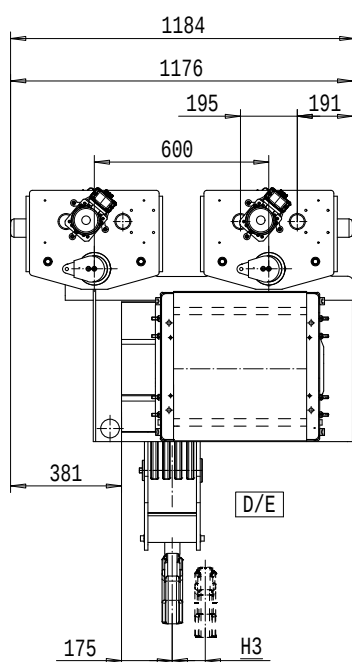

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
16000	2m/M5	2,5/0,4	4/0,7	5/0,8
20000	1Am/M4	2,5/0,4	4/0,7	5/0,8
+ weight (kg):		-	60	80

HOL (m)	Length code	M2 (mm)	H3 (mm)	Weight (kg)
4,5	D	682	44	813
6	E	802	53	830
8	F	952	76	906
10	G	1142	98	930

NOVA Elektroseilzug


Electric wire rope hoist

TROLLEY; DOUBLE GIRDER, HIGH, 2 ROPE FALLS

Hoist type:
ND02H...

SWF
KRANTECHNIK

SI-50Hz

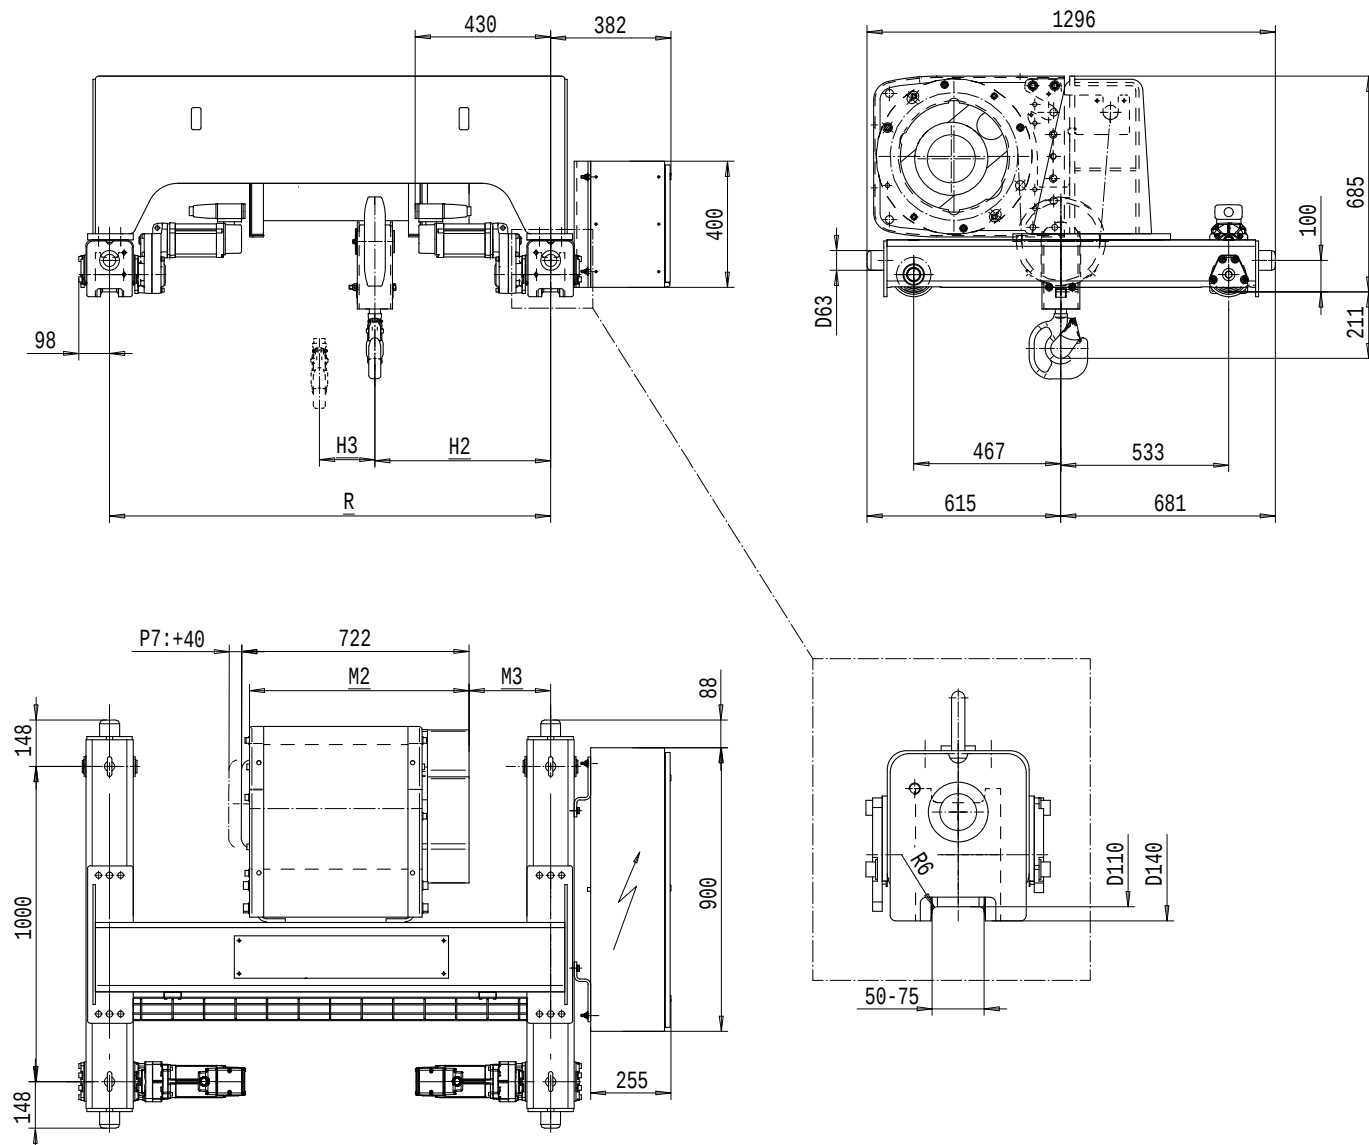

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)			
		Gear+Motor code:			
		E+P5	F+P5	H+P6	J+P7
4000	3m/M6	8/1,3	10/1,7	16/2,7	20/3,3
5000	2m/M5	8/1,3	10/1,7	16/2,7	20/3,3
6300	1Am/M4	8/1,3	-	-	-
+ weight (kg):		-	-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	min R (mm)	Weight (kg)
18	D	697	159	458	176	1200	665
24	E	817	159	458	235	1200	690
32	F	967	122	421	309	1200	715
40	G	1157	372	671	403	1700	795

Note:

Min R with service platform and second brake



Standard rail gauges: 1200, 1400, 1700 and 2000

TROLLEY: DOUBLE GIRDER, HIGH, 4 ROPE FALLS

Hoist type:

ND04H...

SI-50Hz

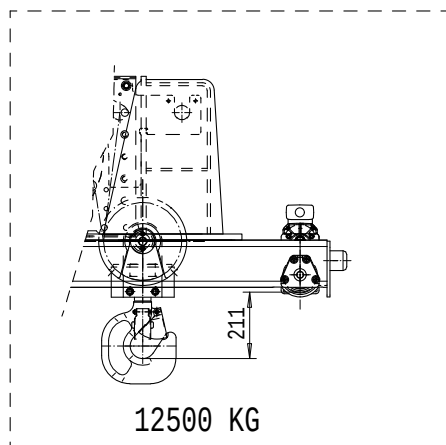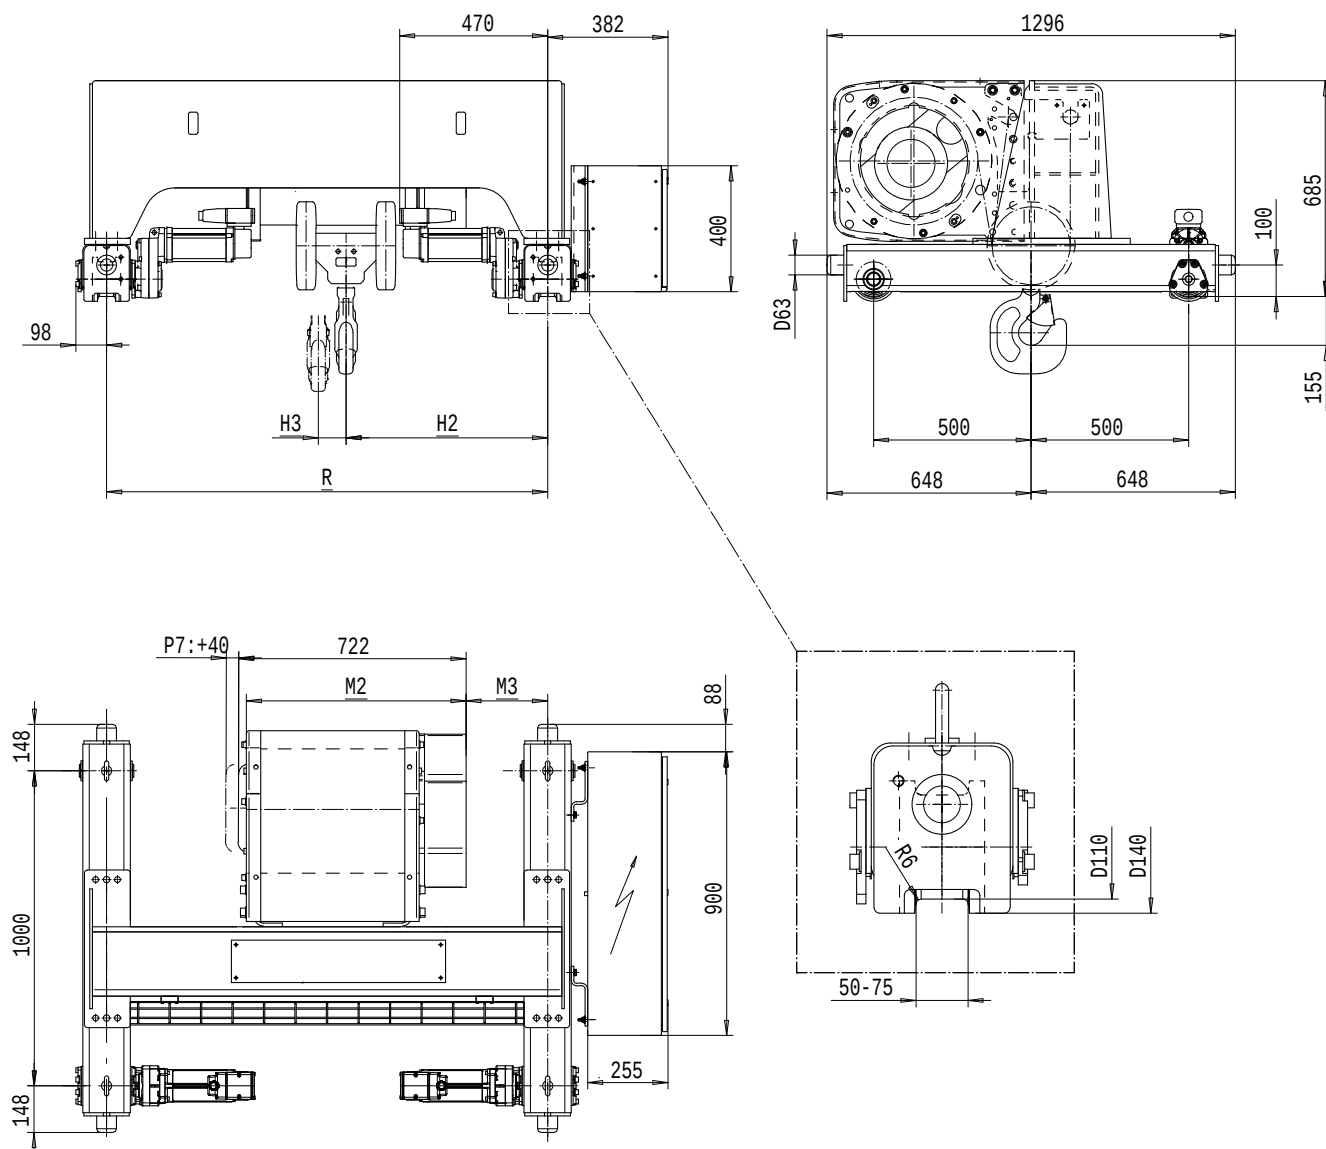

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)			
		Gear+Motor code:			
		E+P5	F+P5	H+P6	J+P7
6300	3m/M6	4/0,7	5/0,8	8/1,3	10/1,7
8000	3m/M6	4/0,7	5/0,8	8/1,3	10/1,7
10000	2m/M5	4/0,7	5/0,8	8/1,3	10/1,7
12500	1Am/M4	4/0,7	-	-	-
+ weight (kg):		-	-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	min R (mm)	Weight (kg)
9	D	697	159	540	88	1200	685
12	E	817	159	540	118	1200	710
16	F	967	122	503	156	1200	735
20	G	1157	372	753	204	1700	815

Note:

Min R with service platform and second brake

Standard rail gauges: 1200, 1400, 1700 and 2000

NOVA Elektroseilzug


Electric wire rope hoist

TROLLEY: DOUBLE GIRDER, HIGH, 6-ROPE FALLS

Hoist type: ND06H...

SWF
KRANTECHNIK

SI-50Hz

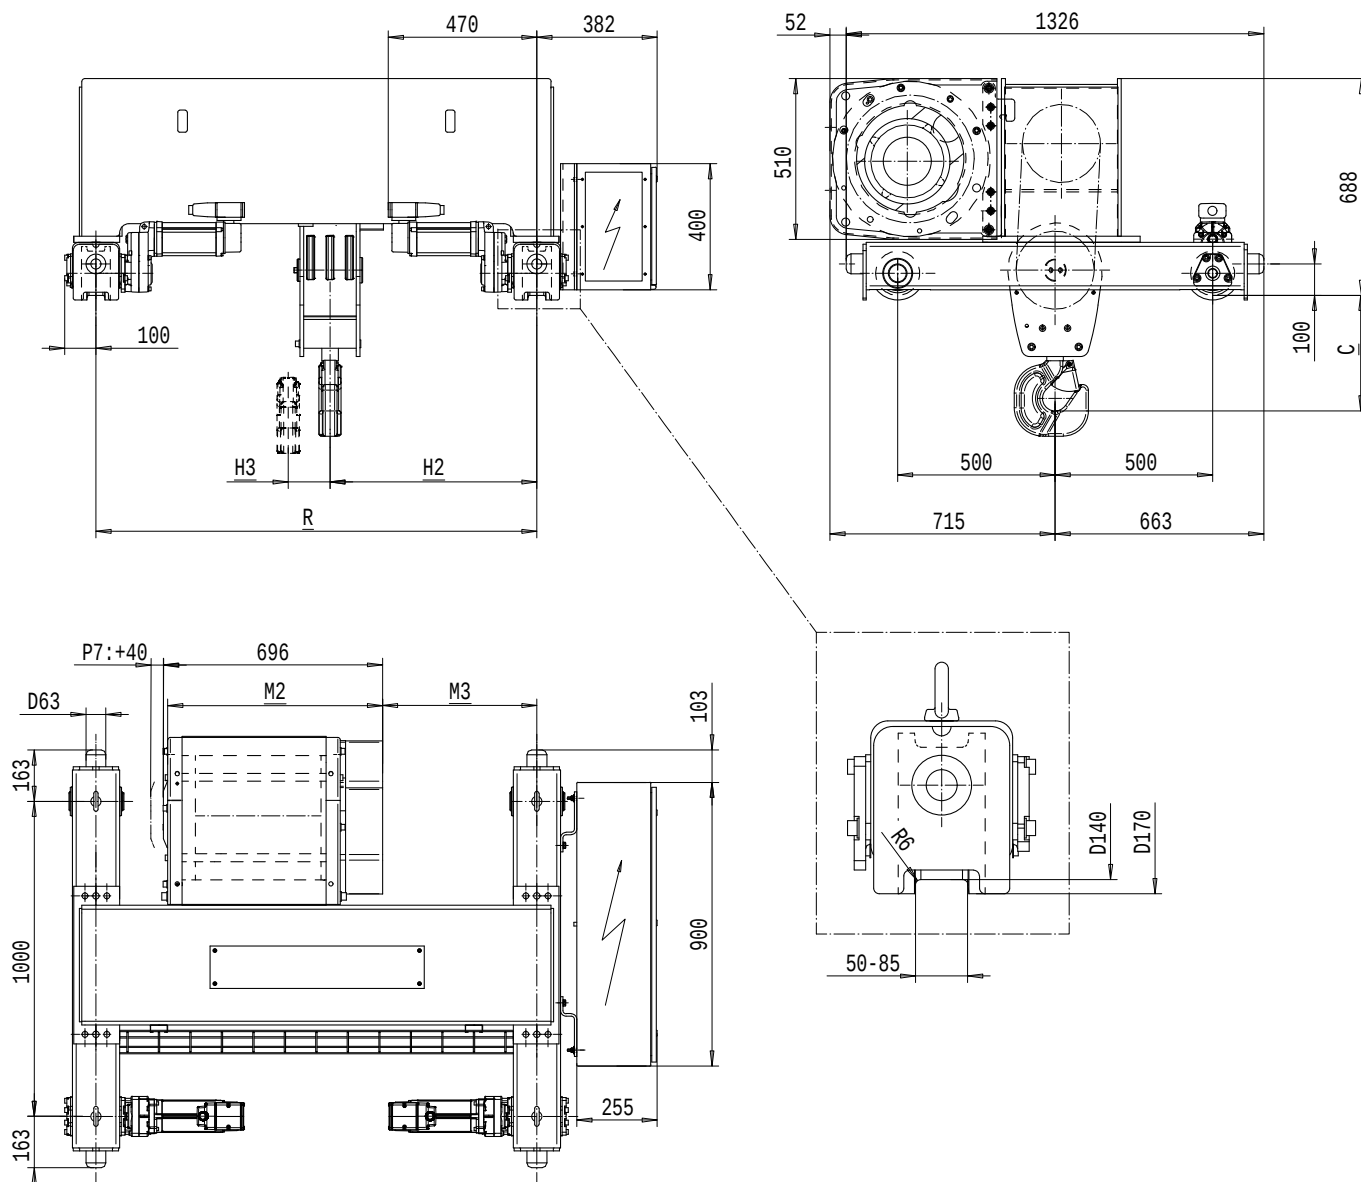

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
12000	3m/M6	3,2/0,5	5/0,8	6,3/1,1
15000	2m/M5	3,2/0,5	5/0,8	6,3/1,1
+ weight (kg):		-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	C (mm)	min R (mm)	Weight (kg)
6	D	682	390	557	53	367	1200	825
8	E	802	490	657	78	367	1400	876
10	F	952	620	802	98	417	1700	945
13	G	1142	770	952	132	417	2000	1020

Note:

Min R with service platform and second brake

Standard rail gauges: 1200, 1400, 1700, 2000 and 2400

NOVA Elektroseilzug


Electric wire rope hoist

TROLLEY: DOUBLE GIRDER, HIGH, 8-ROPE FALLS

Hoist type:
ND08H...

SWF
KRANTECHNIK

SI - 50Hz

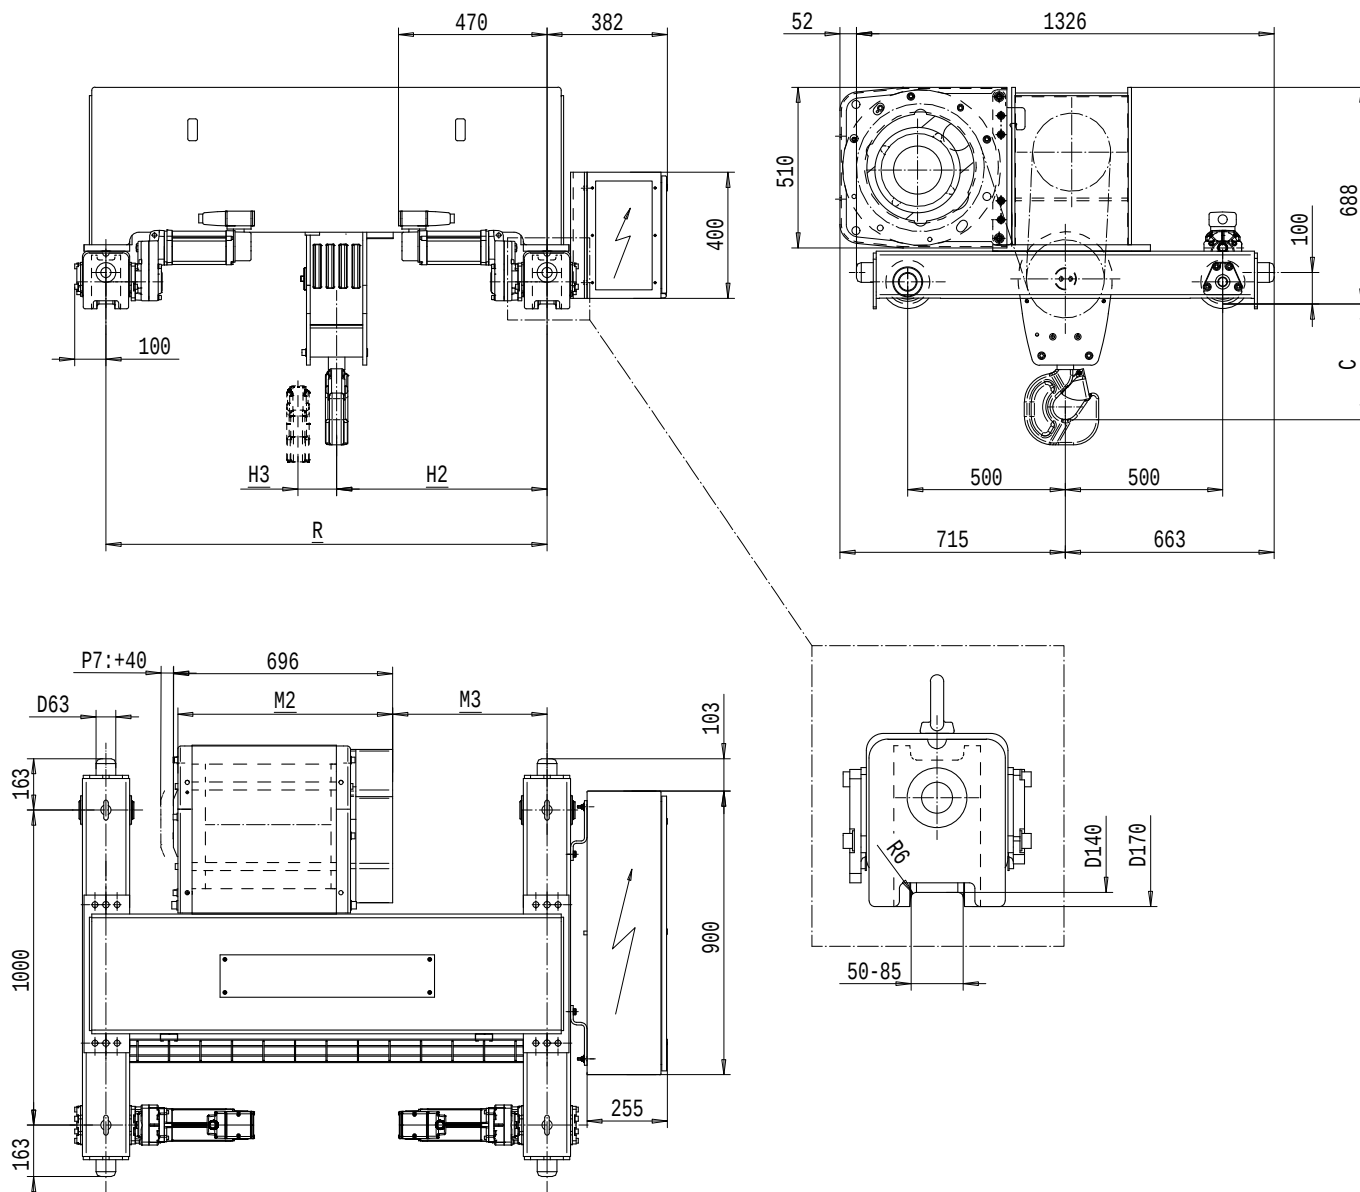

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
16000	2m/M5	2,5/0,4	4/0,7	5/0,8
20000	1Am/M4	2,5/0,4	4/0,7	5/0,8
+ weight (kg):		-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	C (mm)	min R (mm)	Weight (kg)
4,5	D	682	390	568	44	367	1200	845
6	E	802	490	668	53	367	1400	896
8	F	952	620	798	76	417	1700	965
10	G	1142	770	948	98	417	2000	1040

Note:

Min R with service platform and second brake


Standard rail gauges: 1200, 1400, 1700, 2000 and 2400

TROLLEY; DOUBLE GIRDER, HIGH, 2x2 ROPE FALLS

Hoist type:

ND22H...

SI-50Hz

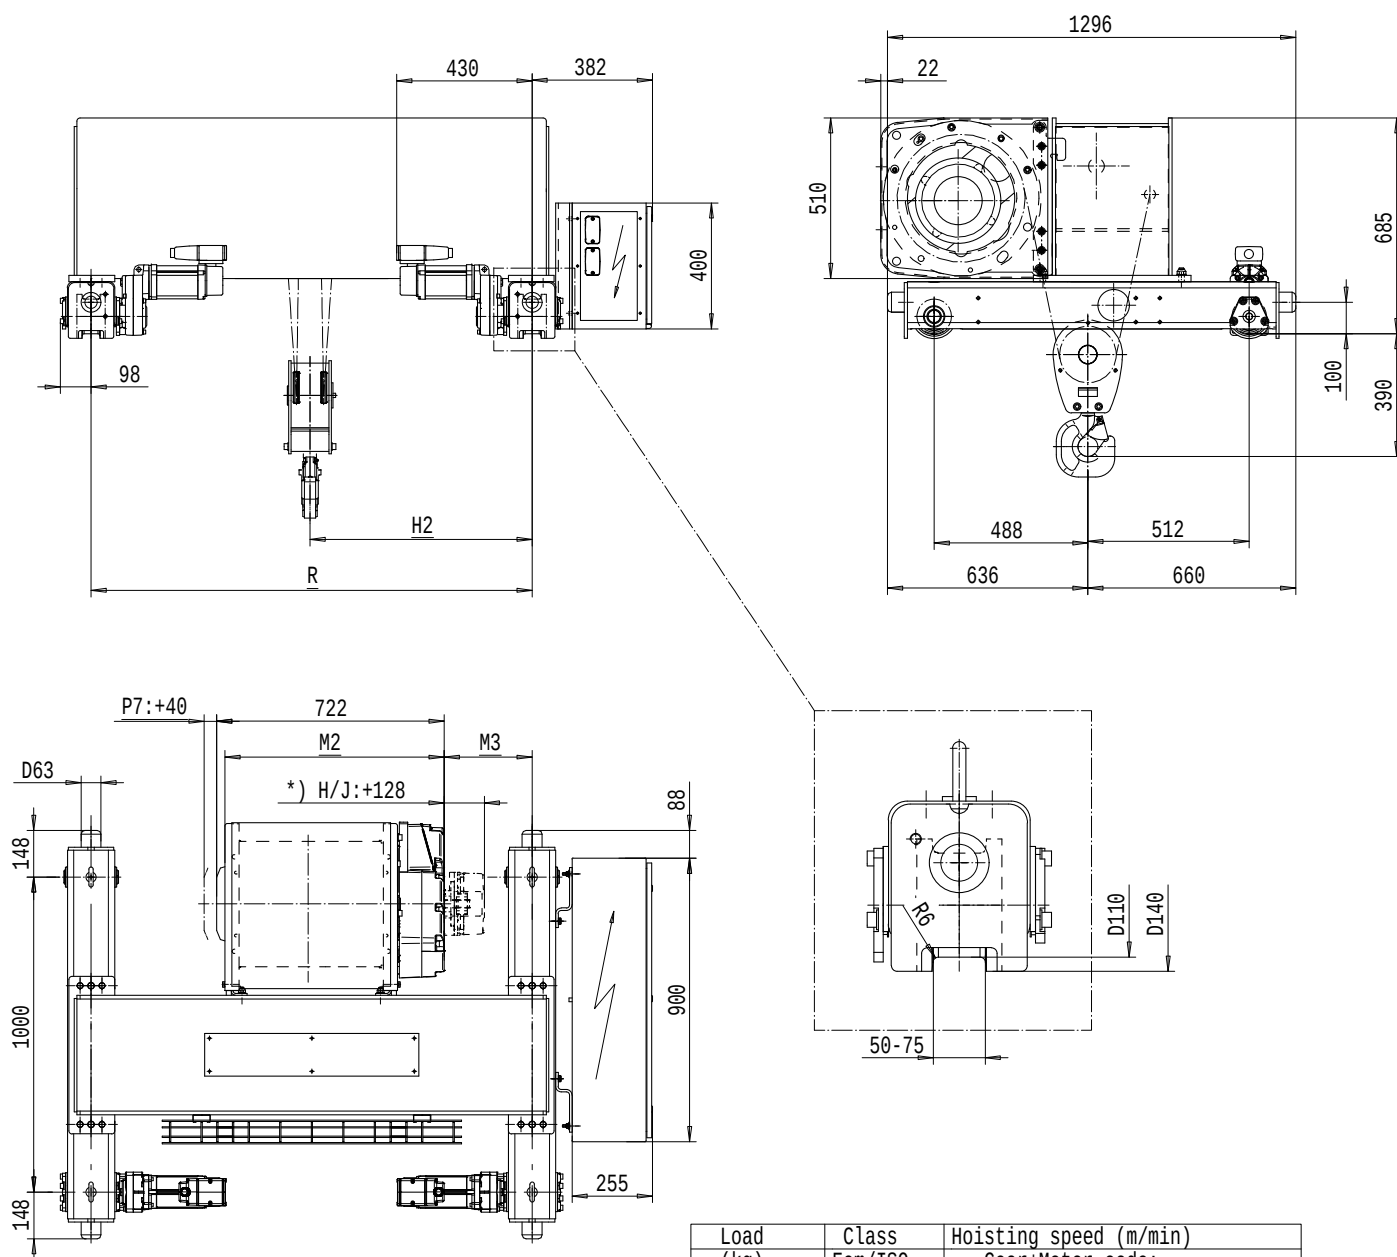

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
4000	3m/M6	10/1,7	16/2,7	20/3,3
5000	2m/M5	10/1,7	16/2,7	20/3,3
+ weight (kg):		-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	min R (mm)	Weight (kg)
8,5	D	697	179	605	1200	750
13	E	817	117	605	1200	775
18	F	967	143	705	1400	835
25	G	1157	197	855	1700	915
33,5	H	1407	105	855	1700	959
46	J	1757	256	1211	2400	1125

Note:
Min R with service platform and gear brake
Standard rail gauges: 1200, 1400, 1700, 2000 and 2400
) Gear brake as standard brake for drum lengths H and J

NOVA Elektroseilzug


Electric wire rope hoist

TROLLEY; DOUBLE GIRDER, HIGH, 2x4 ROPE FALLS

Hoist type:
ND24H...

SWF
KRANTECHNIK

SI - 50Hz

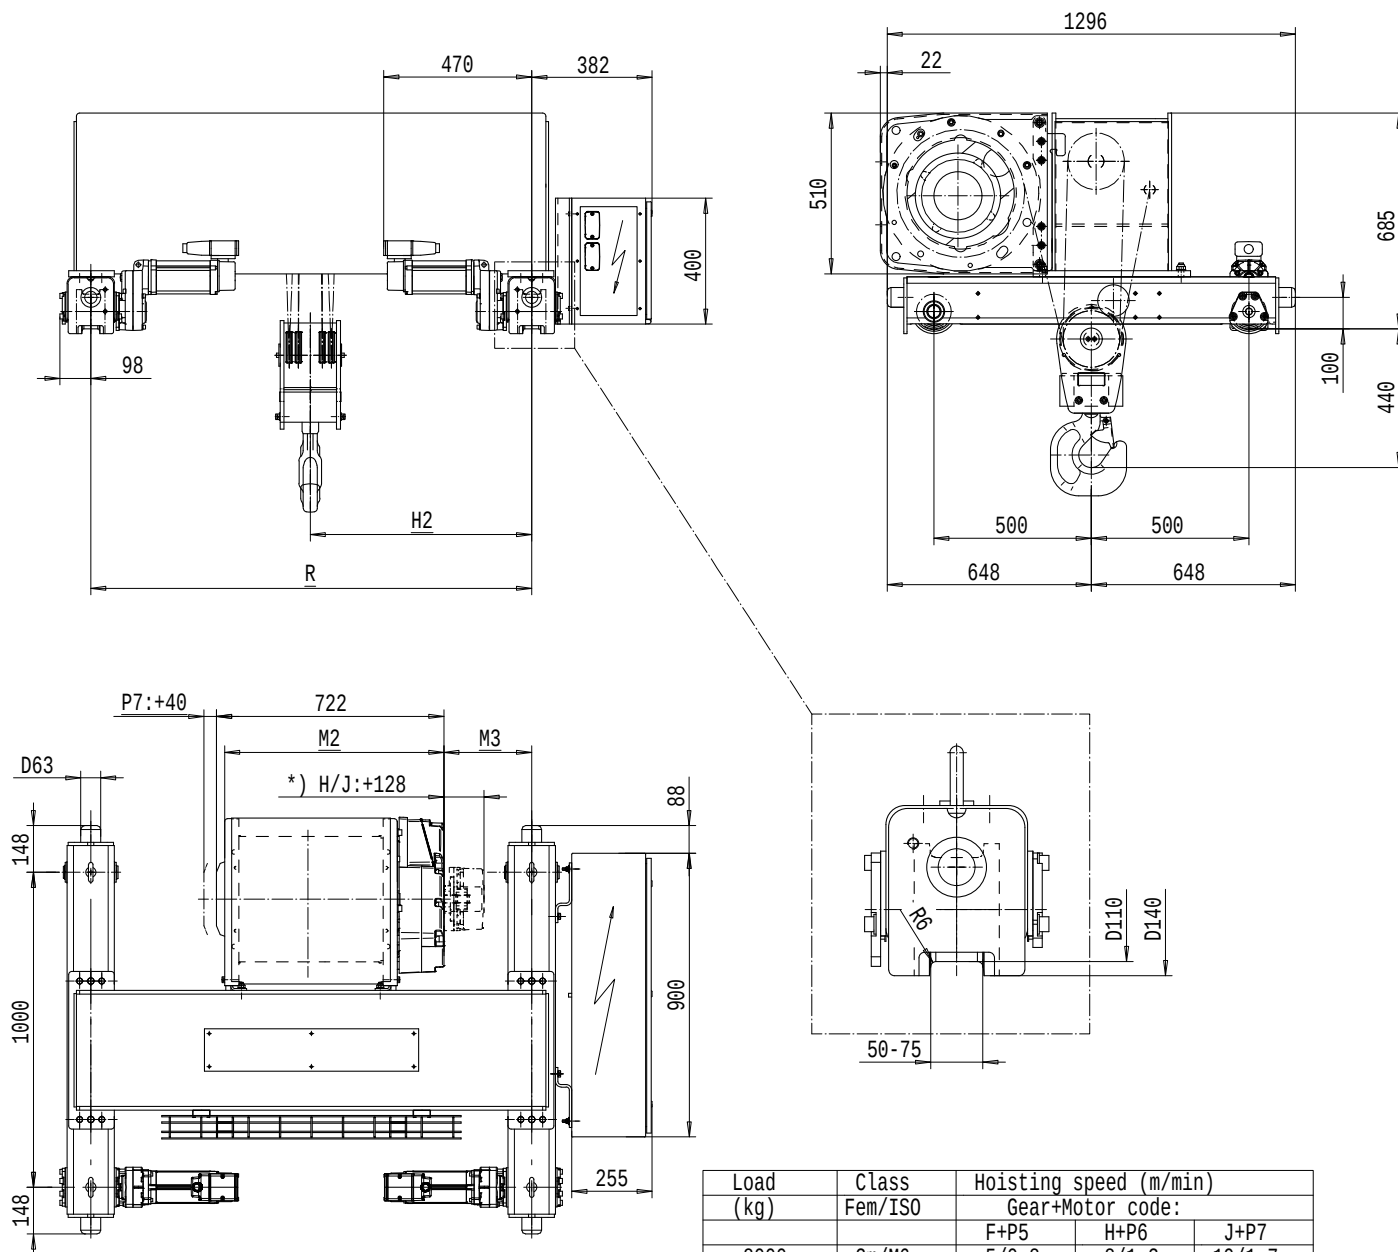

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
8000	3m/M6	5/0,8	8/1,3	10/1,7
10000	2m/M5	5/0,8	8/1,3	10/1,7
+ weight (kg):		-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	min R (mm)	Weight (kg)
4	D	697	179	605	1200	810
6,5	E	817	117	605	1200	835
9	F	967	143	705	1400	895
12,5	G	1157	197	855	1700	975
16,5	H	1404	105	855	1700	1019
23	J	1757	256	1211	2400	1185


Note:
Min R with service platform and gear brake
Standard rail gauges: 1200, 1400, 1700, 2000 and 2400
*) Gear brake as standard brake for drum lengths H and J

TROLLEY: DOUBLE GIRDER, HIGH, 2x6 ROPE FALLS

Hoist type:

ND26H...

SI-50Hz

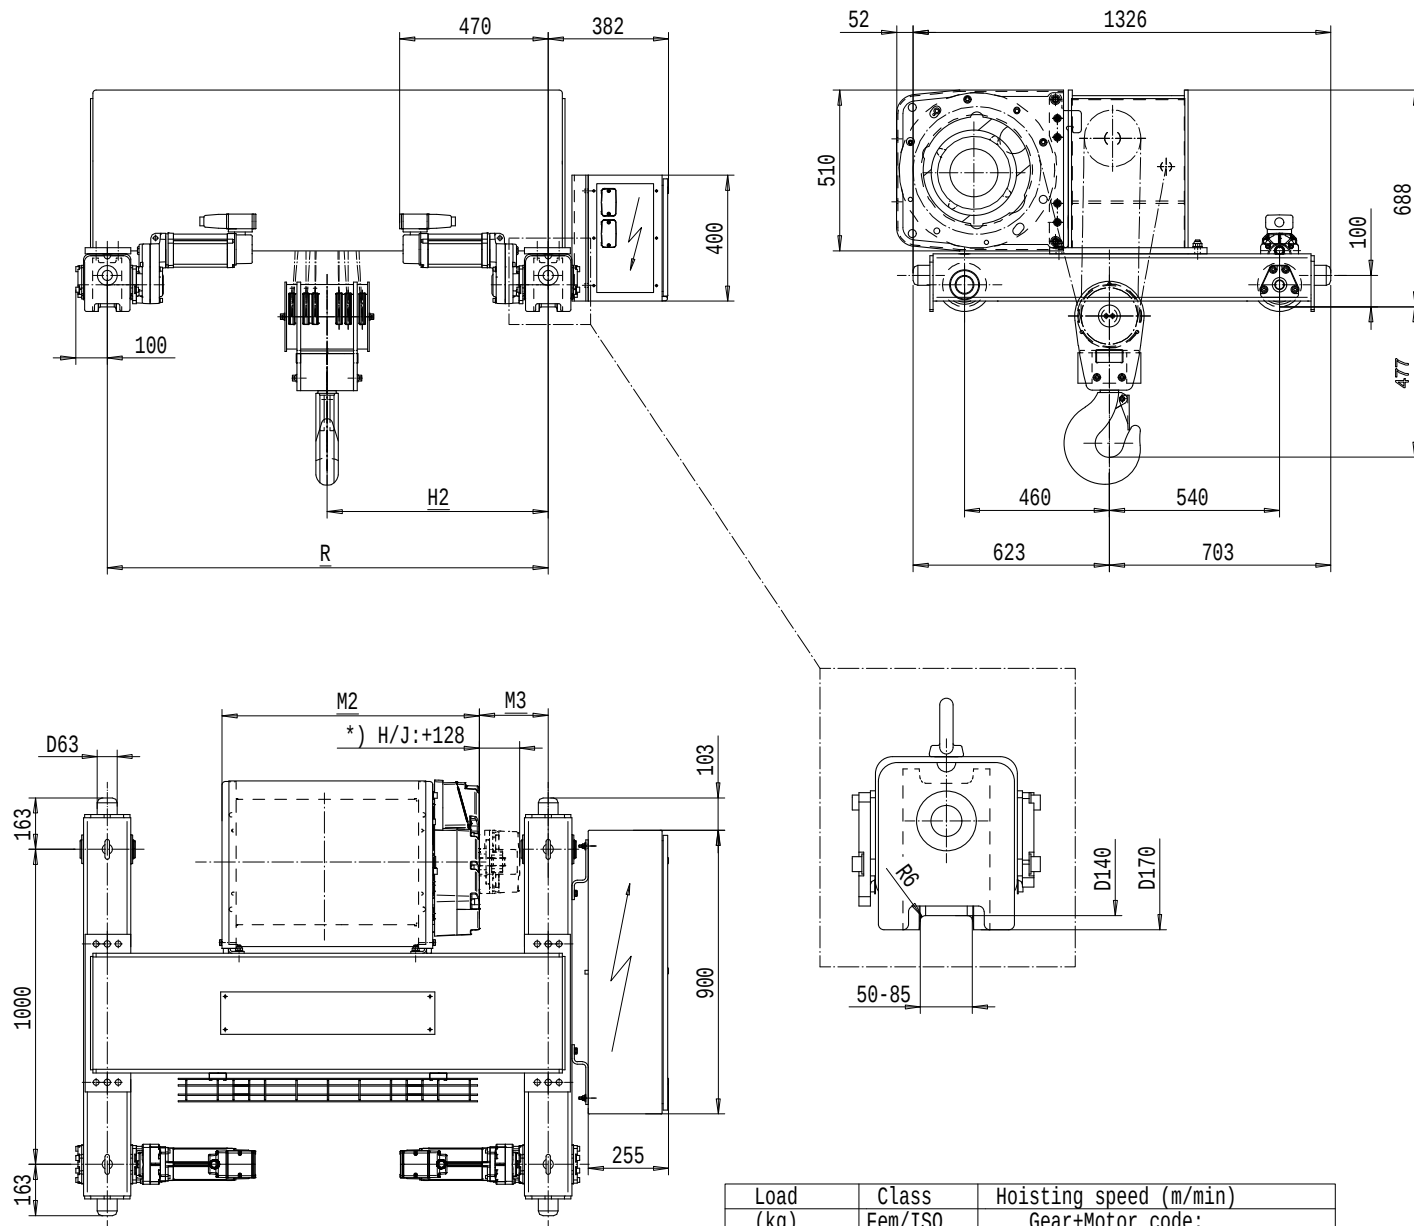

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
12000	3m/M6	3, 2/0, 5	5/0, 8	6, 3/1, 1
15000	2m/M5	3, 2/0, 5	5/0, 8	6, 3/1, 1
+ weight (kg):		-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	min R (mm)	Weight (kg)
4	E	817	117	605	1200	860
6	F	967	143	705	1400	920
8	G	1157	197	855	1700	1000
11	H	1404	105	855	1700	1045
15	J	1757	256	1211	2400	1210

Note:

Min R with service platform and gear brake

Standard rail gauges: 1200, 1400, 1700, 2000 and 2400





*) Gear brake as standard brake for drum lengths H and J

TROLLEY; DOUBLE GIRDER, HIGH, 2X8 ROPE FALLS

Hoist type:

ND28H...

SI - 50Hz

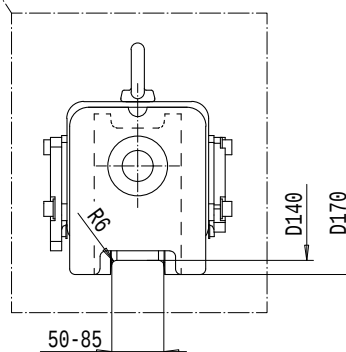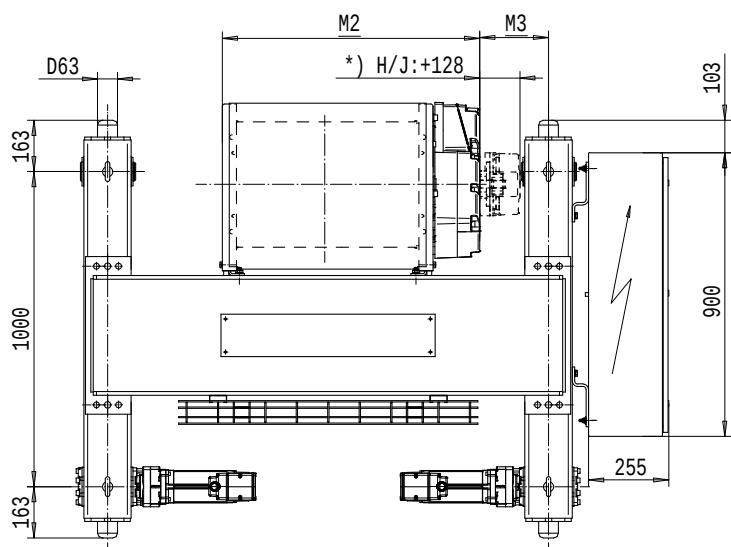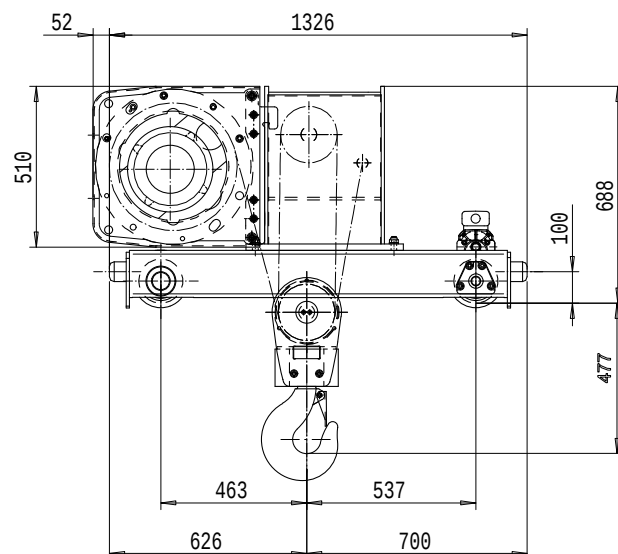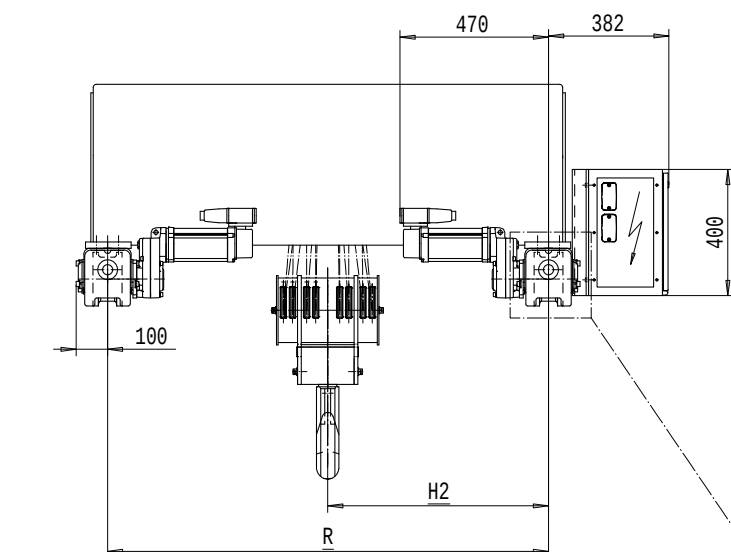

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
16000	2m/M5	2,5/0,4	4/0,7	5/0,8
20000	1Am/M4	2,5/0,4	4/0,7	5/0,8
+ weight (kg):		-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	min R (mm)	Weight (kg)
4,5	F	967	143	705	1400	940
6	G	1157	197	855	1700	1020
8	H	1407	105	855	1700	1065
11,5	J	1757	256	1211	2400	1230

Note:

Min R with service platform and gear brake

Standard rail gauges: 1400, 1700, 2000 and 2400


*) Gear brake as standard brake for drum lengths H and J

TROLLEY: DOUBLE GIRDER, MEDIUM, 2 ROPE FALLS

Hoist type:

ND02M...

SI-50Hz

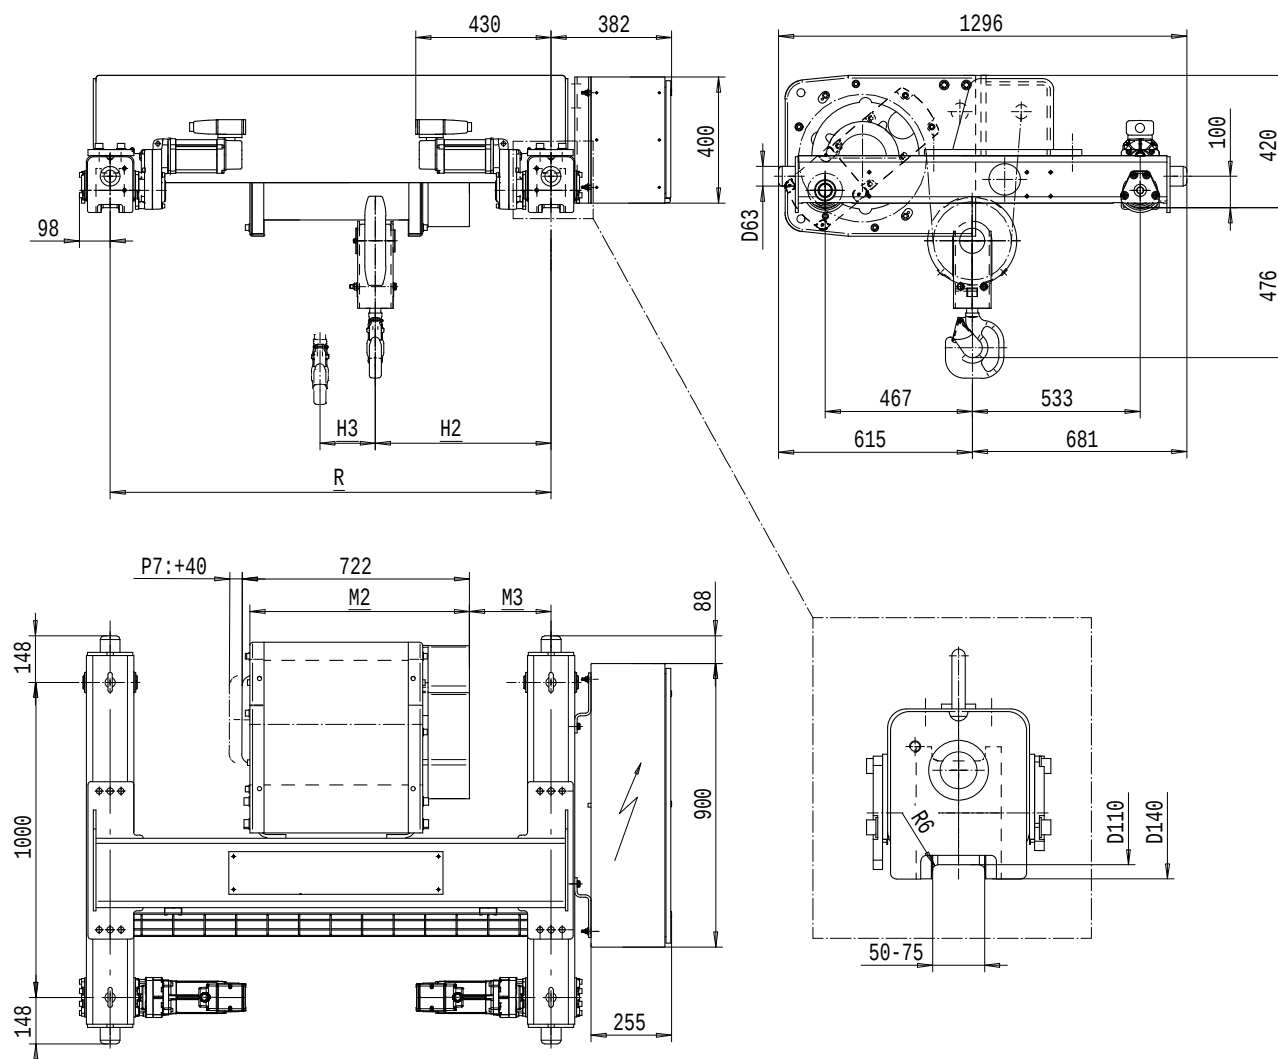

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)			
		Gear+Motor code:			
		E+P5	F+P5	H+P6	J+P7
4000	3m/M6	8/1,3	10/1,7	16/2,7	20/3,3
5000	2m/M5	8/1,3	10/1,7	16/2,7	20/3,3
6300	1Am/M4	8/1,3	-	-	-
+ weight (kg):		-	-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	min R (mm)	Weight (kg)
18	D	697	259	558	176	1400	650
24	E	817	259	558	235	1400	675
32	F	967	372	671	309	1700	720
40	G	1157	522	821	403	2000	760

Note:

Min R with service platform and second brake

Standard rail gauges: 1400, 1700 and 2000

NOVA


Elektroseilzug
Electric wire rope hoist

TROLLEY; DOUBLE GIRDER, MEDIUM, 4 ROPE FALLS

Hoist type:
ND04M...

SWF
KRANTECHNIK

SI - 50Hz

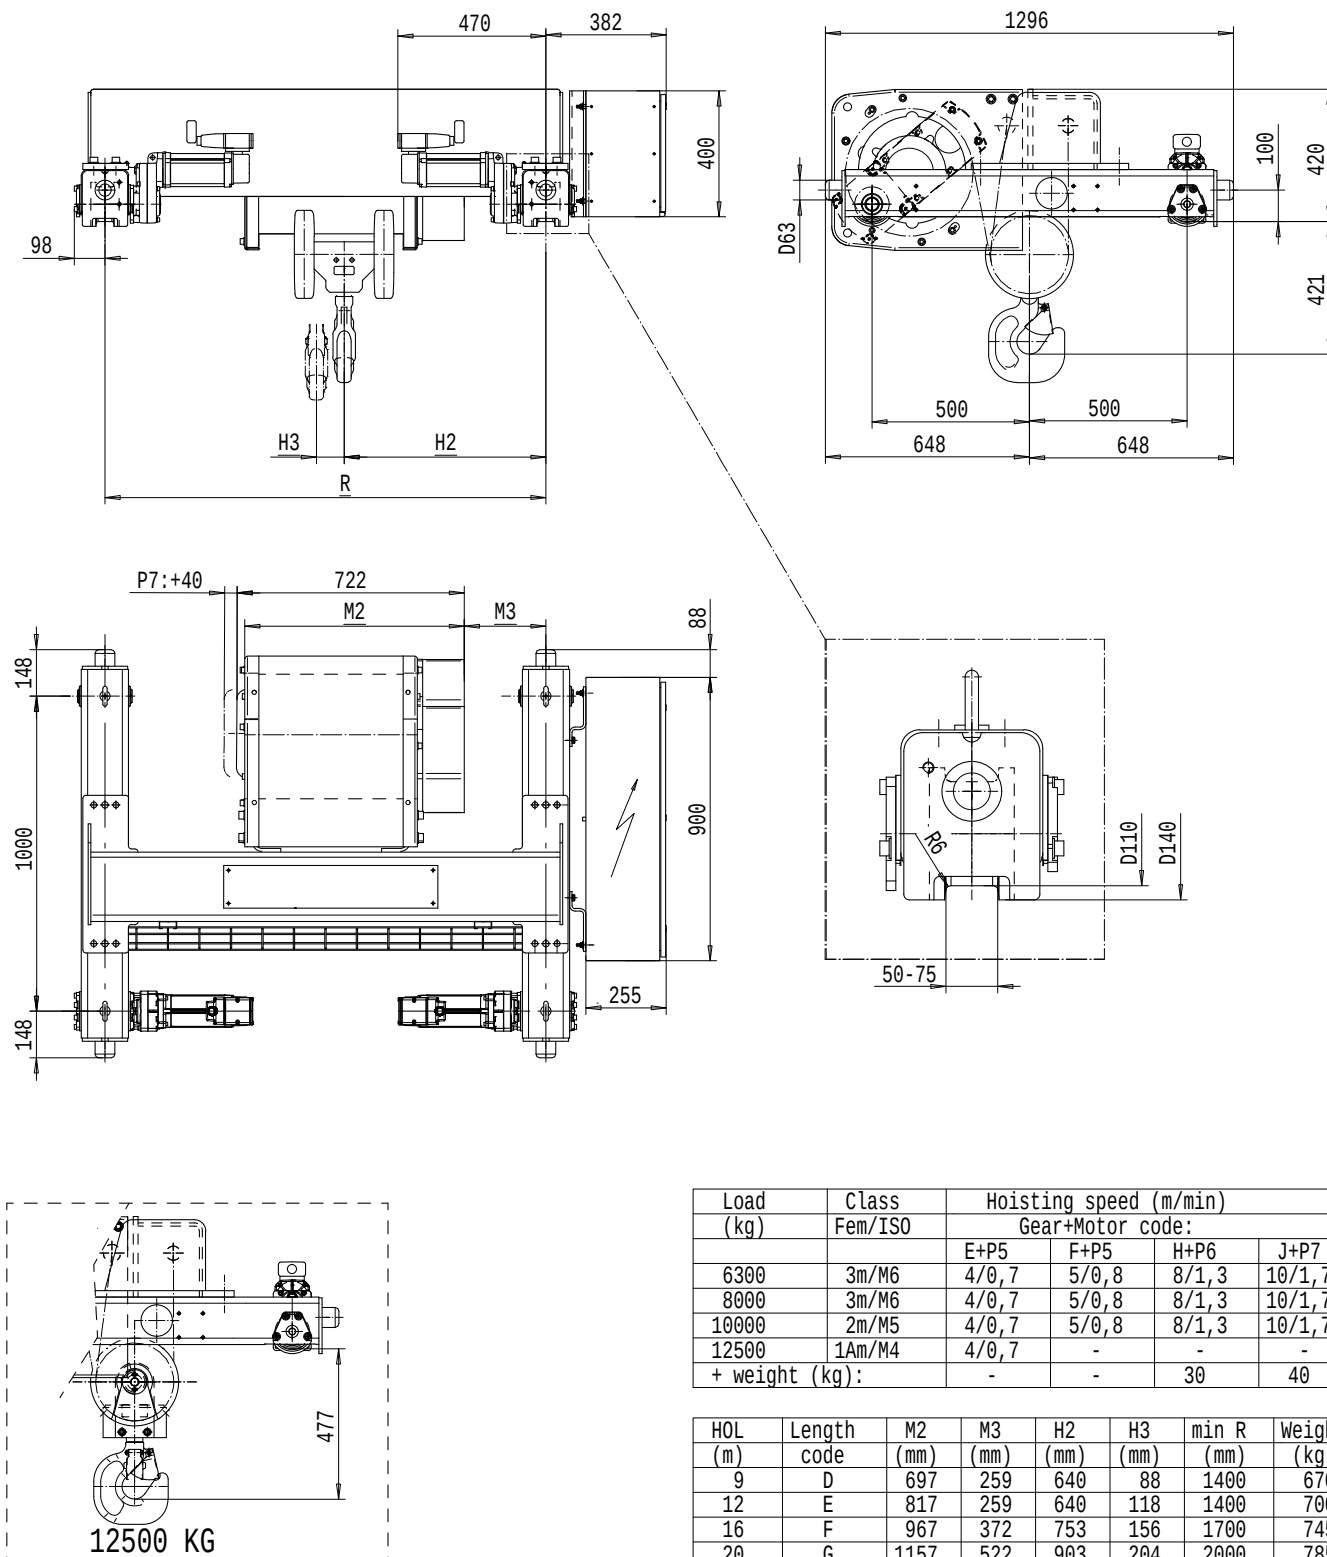

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)			
		Gear+Motor code:			
		E+P5	F+P5	H+P6	J+P7
6300	3m/M6	4/0,7	5/0,8	8/1,3	10/1,7
8000	3m/M6	4/0,7	5/0,8	8/1,3	10/1,7
10000	2m/M5	4/0,7	5/0,8	8/1,3	10/1,7
12500	1Am/M4	4/0,7	-	-	-
+ weight (kg):		-	-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	min R (mm)	Weight (kg)
9	D	697	259	640	88	1400	670
12	E	817	259	640	118	1400	700
16	F	967	372	753	156	1700	745
20	G	1157	522	903	204	2000	785

Note:

Min R with service platform and second brake

Standard rail gauges: 1400, 1700 and 2000

NOVA Elektroseilzug


Electric wire rope hoist

TROLLEY: DOUBLE GIRDER, MEDIUM, 6 ROPE FALLS

Hoist type:
ND06M...

SWF
KRANTECHNIK

SI - 50Hz

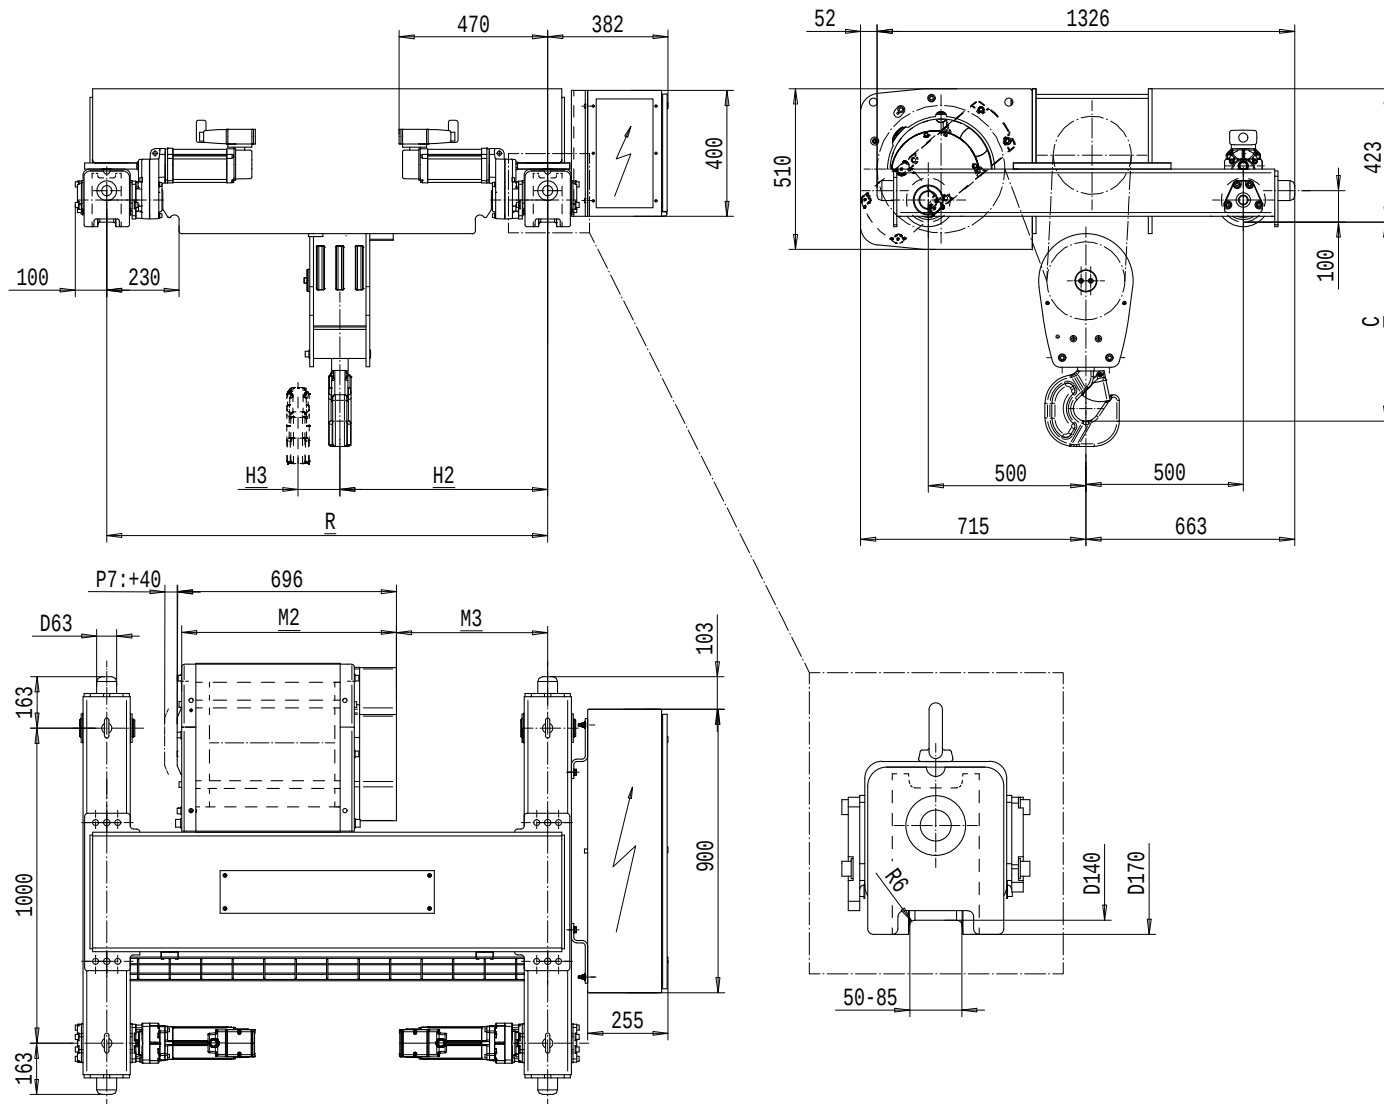

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
12000	3m/M6	3,2/0,5	5/0,8	6,3/1,1
15000	2m/M5	3,2/0,5	5/0,8	6,3/1,1
+ weight (kg):		-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	C (mm)	min R (mm)	Weight (kg)
6	D	682	480	657	53	632	1400	775
8	E	802	630	807	78	632	1700	820
10	F	952	770	952	98	682	2000	855
13	G	1142	970	1152	132	682	2400	885

Note:

Min R with service platform and second brake

Standard rail gauges:1400,1700,2000 and 2400

NOVA Elektroseilzug


Electric wire rope hoist

TROLLEY; DOUBLE GIRDER, MEDIUM, 2x2 ROPE FALLS

Hoist type:
ND22M...

SWF
KRANTECHNIK





SI - 50Hz

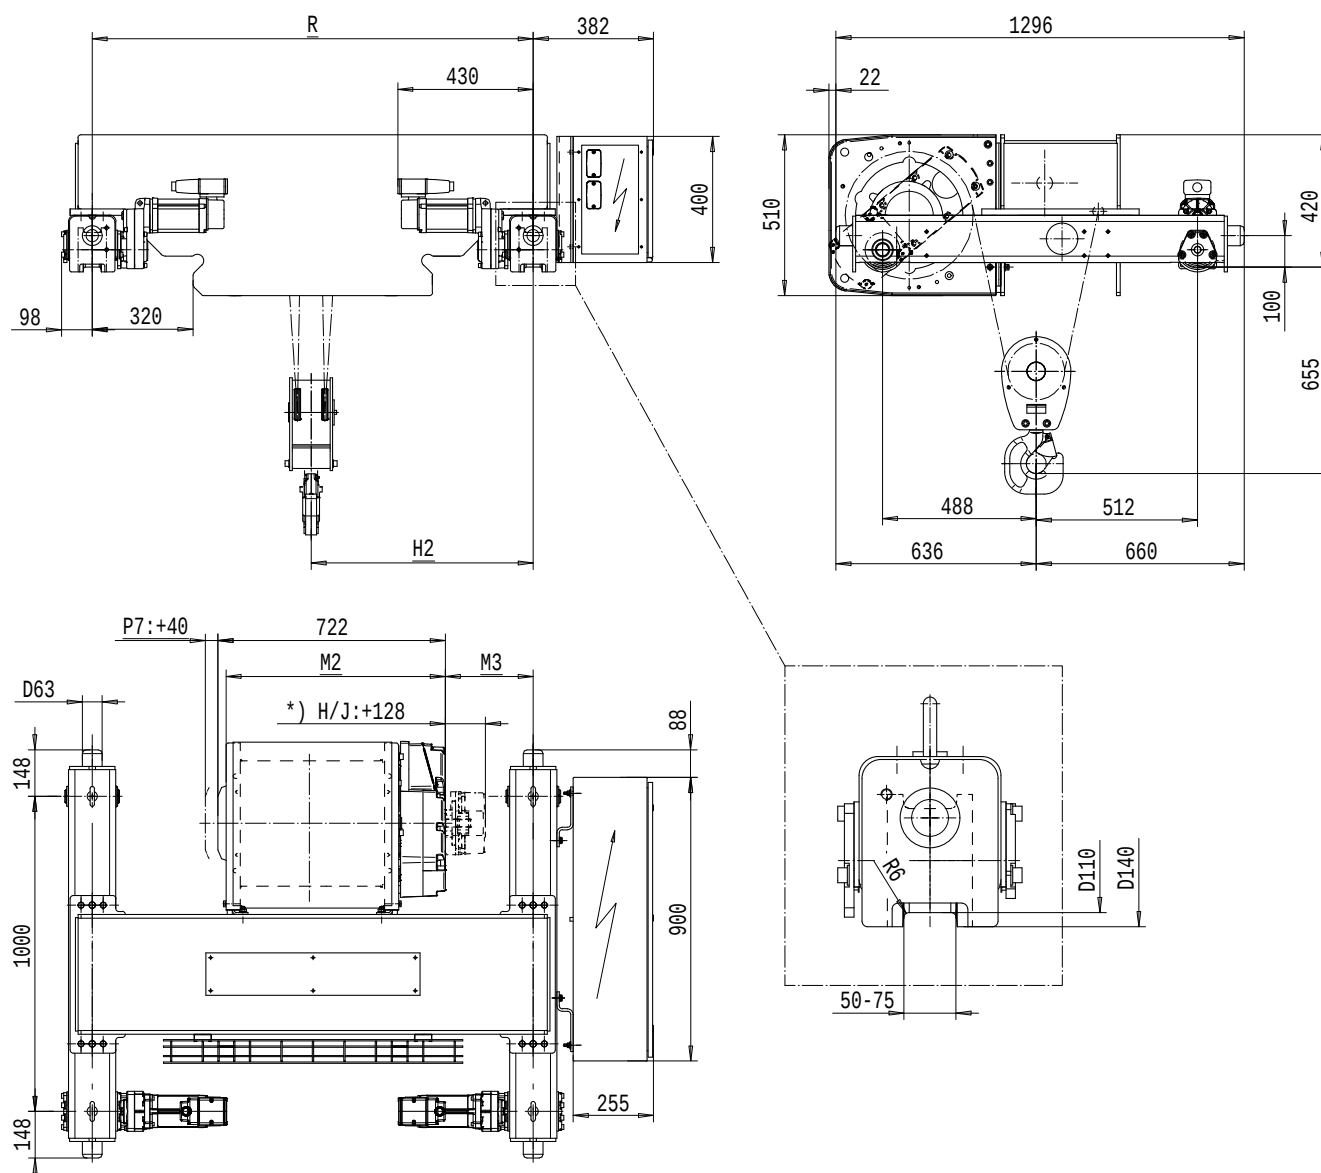

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
4000	3m/M6	10/1,7	16/2,7	20/3,3
5000	2m/M5	10/1,7	16/2,7	20/3,3
+ weight (kg):		-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	min R (mm)	Weight (kg)
8,5	D	697	279	705	1400	720
13	E	817	217	705	1400	780
18	F	967	292	855	1700	790
25	G	1157	197	855	1700	850
33,5	H	1407	256	1036	2000	880
46	J	1757	256	1211	2400	985

Note:
Min R with service platform and gear brake
Standard rail gauges: 1400, 1700, 2000 and 2400
*) Gear brake as standard brake for drum lengths H and J

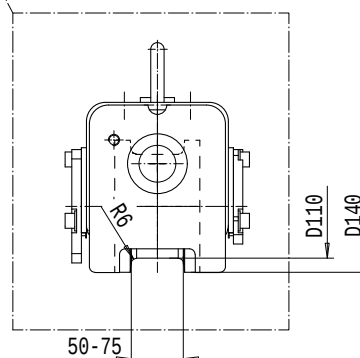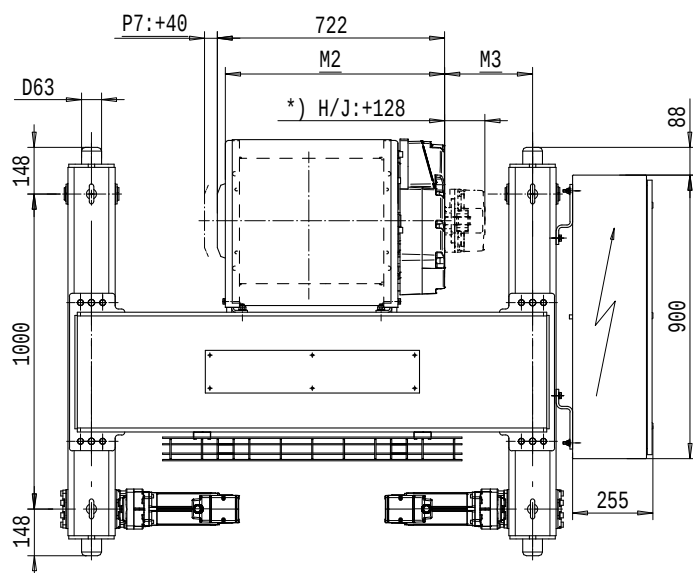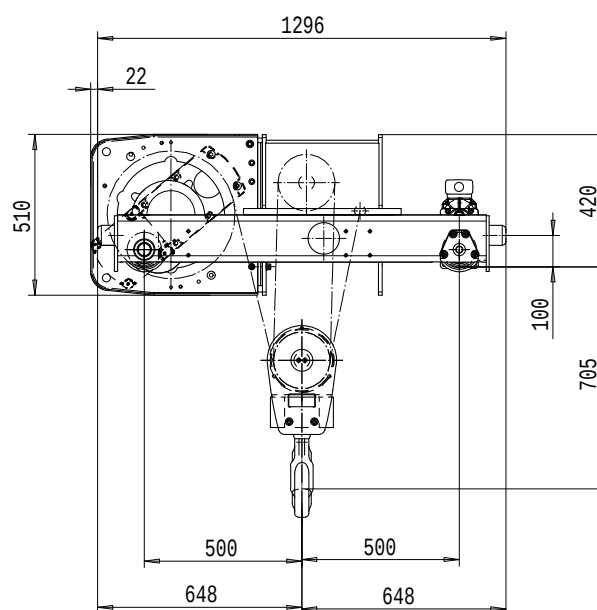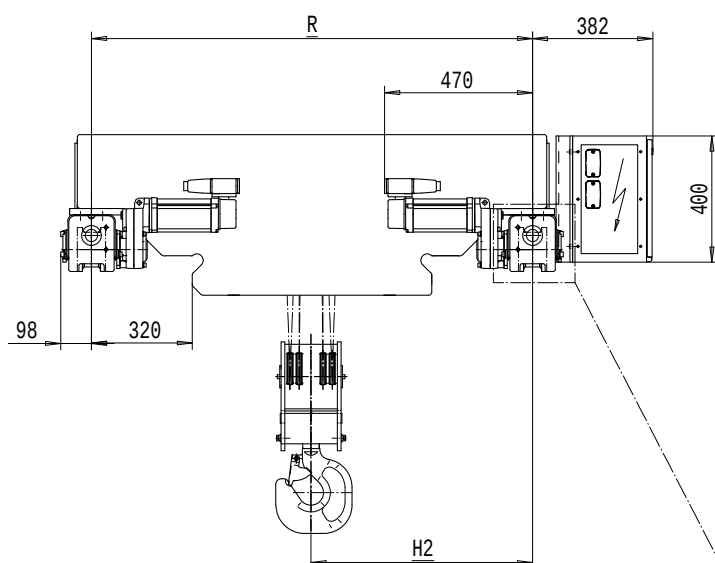

Load	Class	Hoisting speed (m/min)		
(kg)	Fem/ISO	Gear+Motor code:		
		F+P5	H+P6	J+P7
8000	3m/M6	5/0,8	8/1,3	10/1,7
10000	2m/M5	5/0,8	8/1,3	10/1,7
+ weight (kg):		-	30	40

HOL	Length	M2	M3	H2	min R	Weight
(m)	code	(mm)	(mm)	(mm)	(mm)	(kg)
4	D	697	279	703	1400	780
6,5	E	817	217	705	1400	840
9	F	967	292	853	1700	850
12,5	G	1157	197	855	1700	910
16,5	H	1404	256	1034	2000	940
23	J	1757	256	1209	2400	1045

Note:

Min R with service platform and gear brake
--

Standard rail gauges:1400,1700,2000 and 2400
--

*) Gear brake as standard brake for drum lengths H and J

NOVA


Elektroseilzug
Electric wire rope hoist

TROLLEY; DOUBLE GIRDER, MEDIUM, 2x6 ROPE FALLS

Hoist type:
ND26M...

SWF
KRANTECHNIK

SI-50Hz

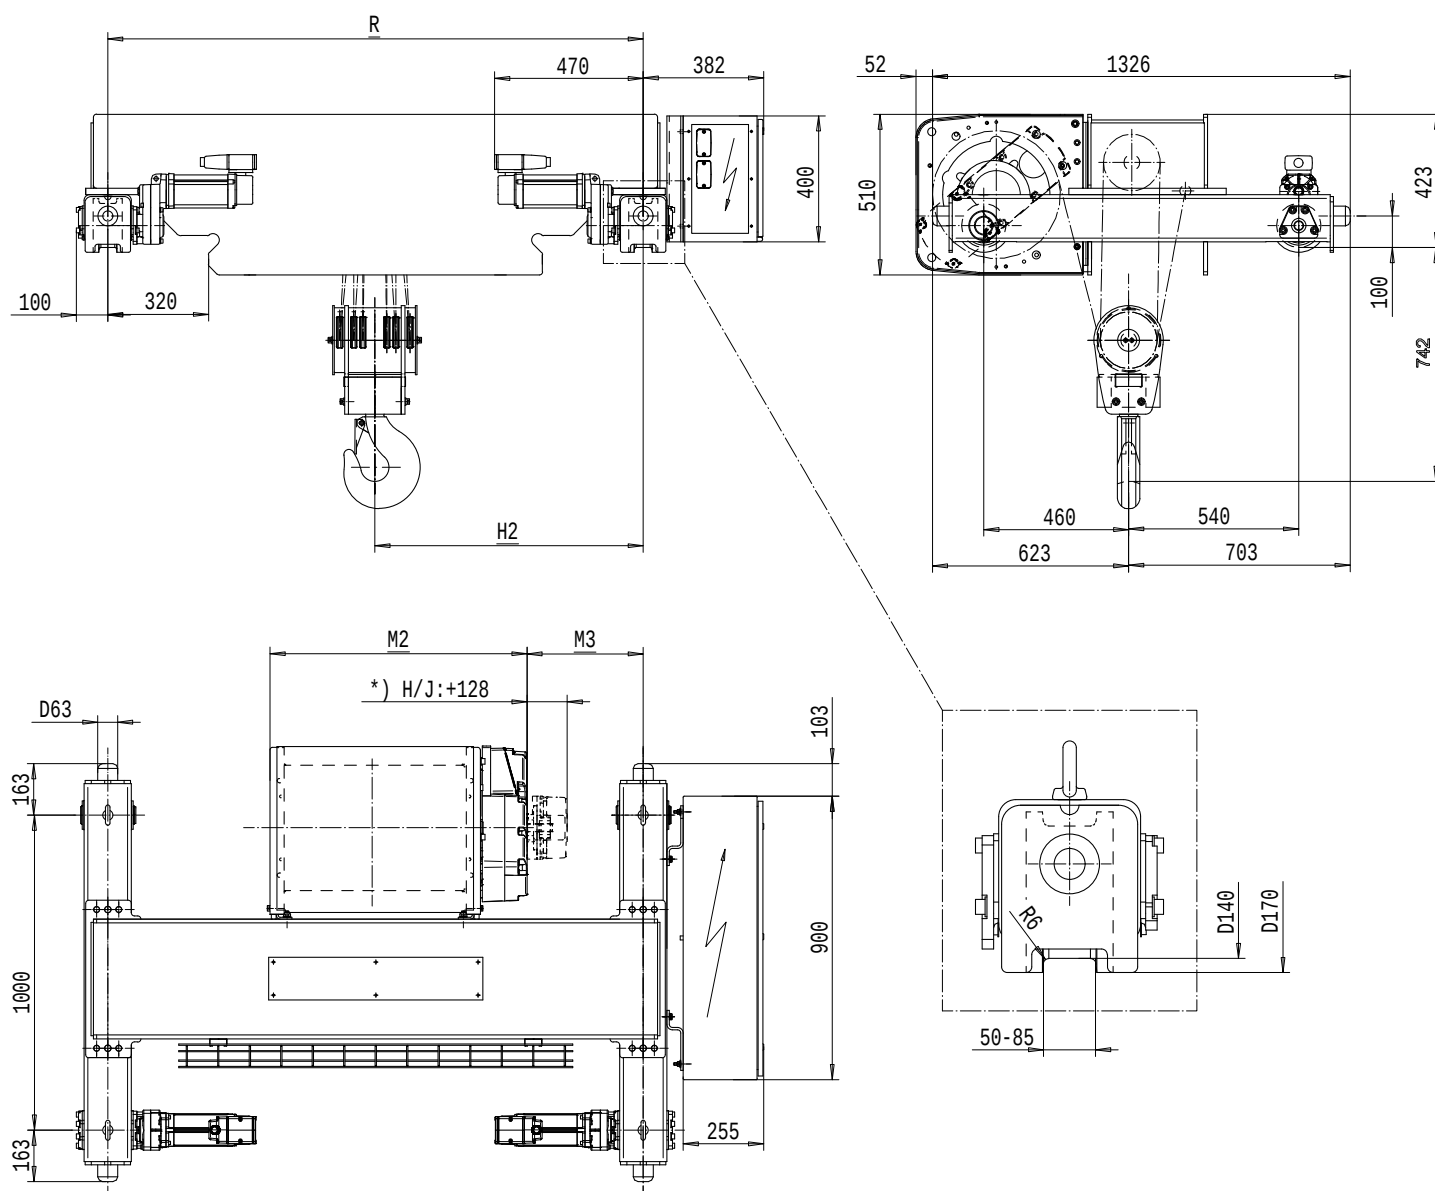

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
12000	3m/M6	3, 2/0, 5	5/0, 8	6, 3/1, 1
15000	2m/M5	3, 2/0, 5	5/0, 8	6, 3/1, 1
+ weight (kg):		-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	min R (mm)	Weight (kg)
4	E	817	217	705	1400	860
6	F	967	292	852	1700	870
8	G	1157	197	855	1700	930
11	H	1404	256	1033	2000	960
15	J	1757	256	1208	2400	1065

Note:

Min R with service platform and gear brake

Standard rail gauges: 1400, 1700, 2000 and 2400

*) Gear brake as standard brake for drum lengths H and J

NOVA


Elektroseilzug
Electric wire rope hoist

TROLLEY; DOUBLE GIRDER, MEDIUM, 2X8 ROPE FALLS

Hoist type:
ND28M...

SWF
KRANTECHNIK

SI-50Hz

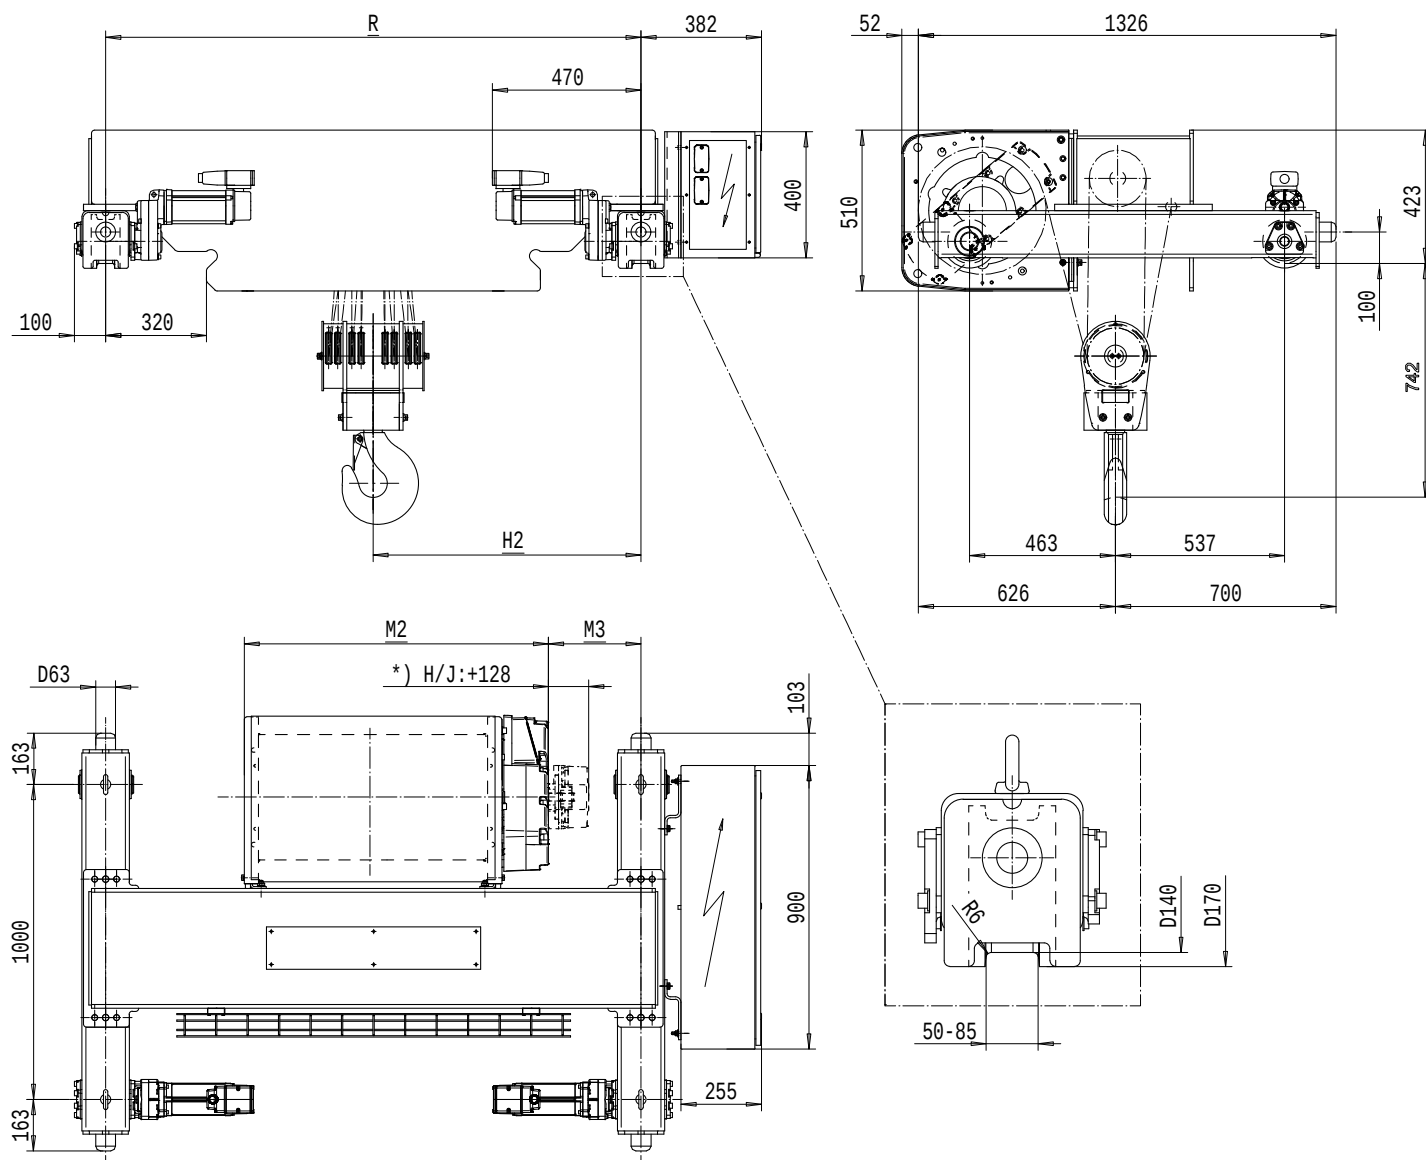

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)		
		Gear+Motor code:		
		F+P5	H+P6	J+P7
16000	2m/M5	2,5/0,4	4/0,7	5/0,8
20000	1Am/M4	2,5/0,4	4/0,7	5/0,8
+ weight (kg):		-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	min R (mm)	Weight (kg)
4,5	F	967	292	851	1700	890
6	G	1157	197	855	1700	950
8	H	1407	256	1032	2000	980
11,5	J	1757	256	1207	2400	1085

Note:

Min R with service platform and gear brake

Standard rail gauges: 1400, 1700, 2000 and 2400

*) Gear brake as standard brake for drum lengths H and J

NOVA Elektroseilzug


Electric wire rope hoist

TROLLEY: DOUBLE GIRDER, LOW, 2 ROPE FALLS

Hoist type:
ND02W...

SWF
KRANTECHNIK

SI-50Hz

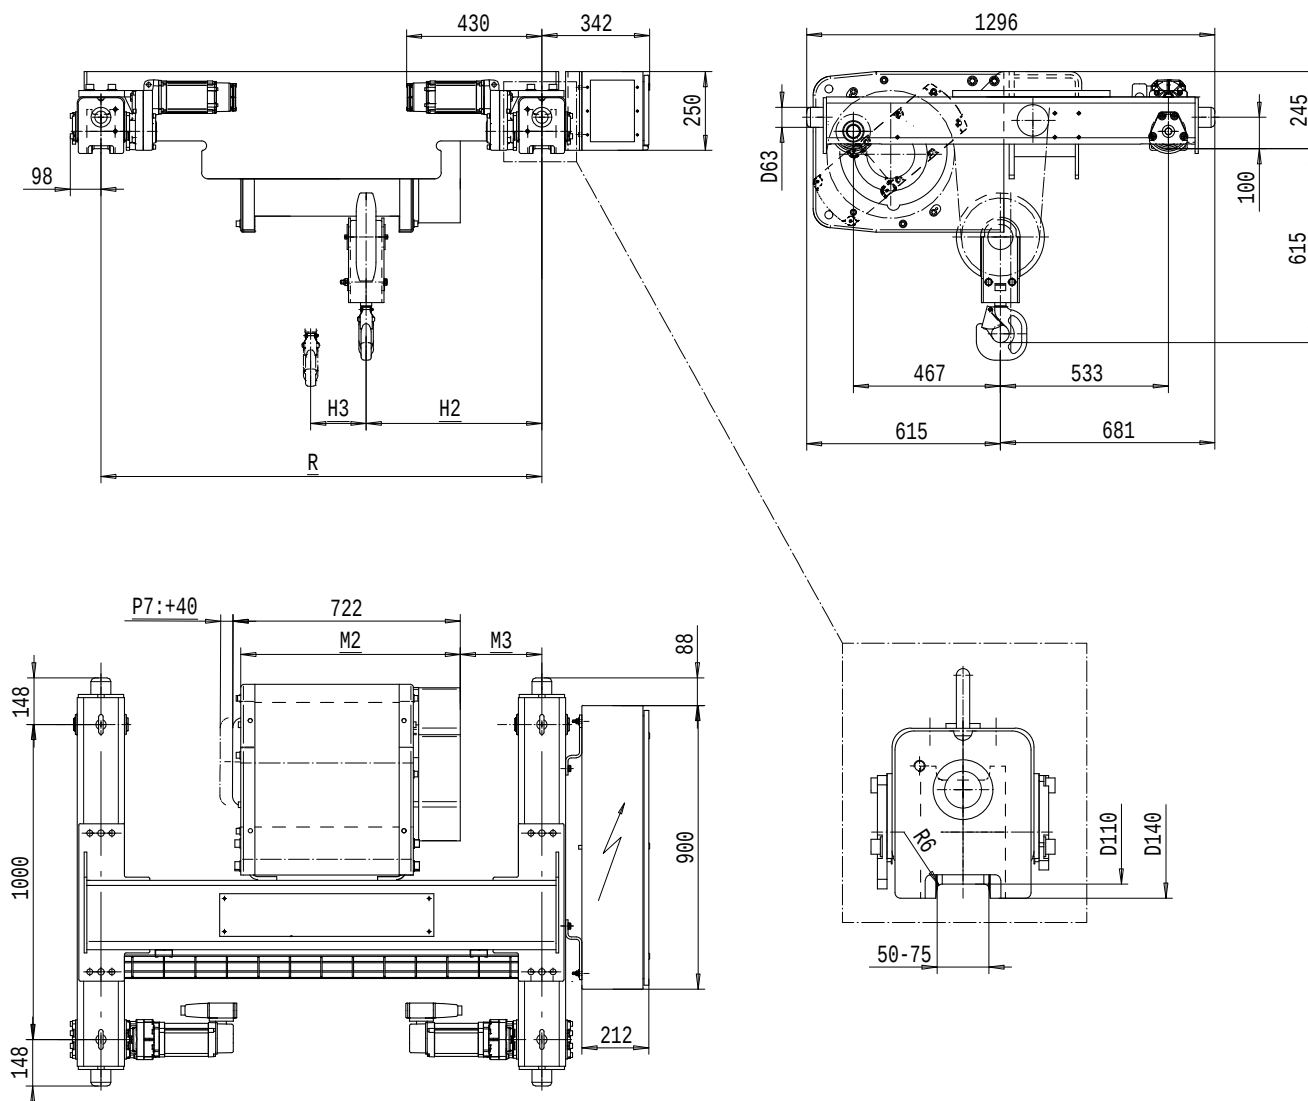

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)			
		Gear+Motor code:			
		E+P5	F+P5	H+P6	J+P7
4000	3m/M6	8/1,3	10/1,7	16/2,7	20/3,3
5000	2m/M5	8/1,3	10/1,7	16/2,7	20/3,3
6300	1Am/M4	8/1,3	-	-	-
+ weight (kg):		-	-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	min R (mm)	Weight (kg)
18	D	697	259	558	176	1400	650
24	E	817	259	558	235	1400	675
32	F	967	372	671	309	1700	720
40	G	1157	522	821	403	2000	760

Note:

Min R with service platform and second brake

Standard rail gauges: 1400, 1700 and 2000

NOVA



Elektroseilzug
Electric wire rope hoist

TROLLEY: DOUBLE GIRDER, LOW, 4 ROPE FALLS

Hoist type:
ND04W...

SWF
KRANTECHNIK

SI - 50Hz

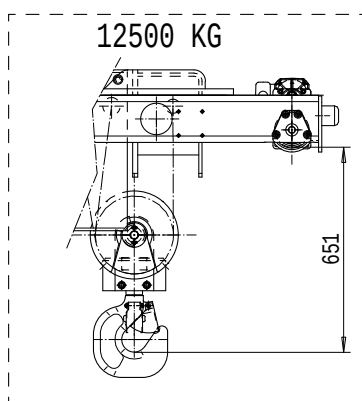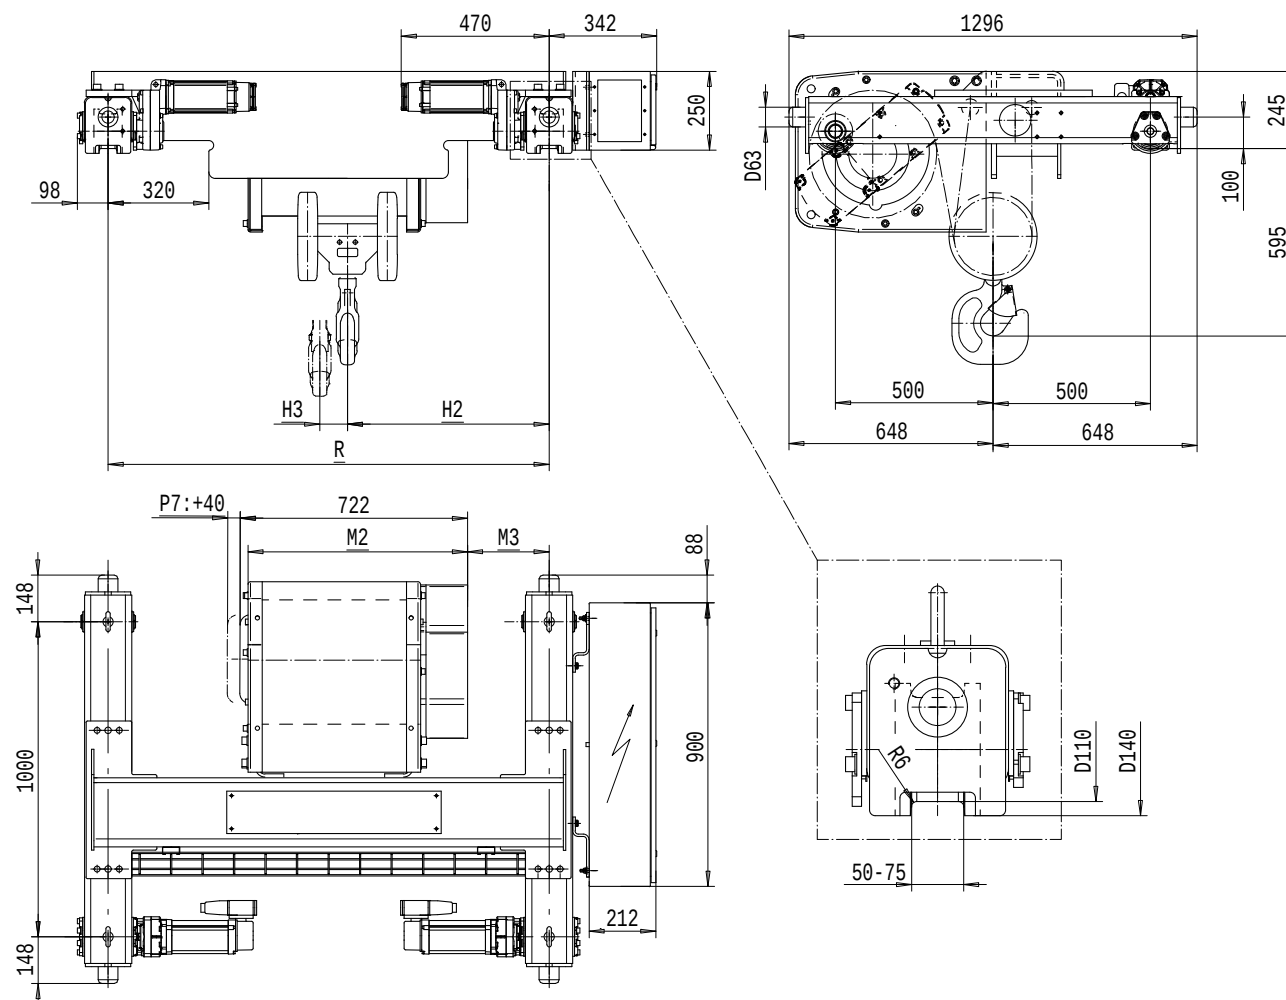

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)			
		Gear+Motor code:			
		E+P5	F+P5	H+P6	J+P7
6300	3m/M6	4/0,7	5/0,8	8/1,3	10/1,7
8000	3m/M6	4/0,7	5/0,8	8/1,3	10/1,7
10000	2m/M5	4/0,7	5/0,8	8/1,3	10/1,7
12500	1Am/M4	4/0,7	-	-	-
+ weight (kg):		-	-	30	40

HOL (m)	Length code	M2 (mm)	M3 (mm)	H2 (mm)	H3 (mm)	min R (mm)	Weight (kg)
9	D	697	259	640	88	1400	670
12	E	817	259	640	118	1400	700
16	F	967	372	753	156	1700	745
20	G	1157	522	903	204	2000	785

Note:

Min R with service platform and second brake

Standard rail gauges: 1400, 1700 and 2000

NOVA Elektroseilzug



Electric wire rope hoist

HOIST: MACHINERY HOIST, 1 ROPE FALLS

Hoist type:
NDM1V...


SWF
KRANTECHNIK

SI-50Hz

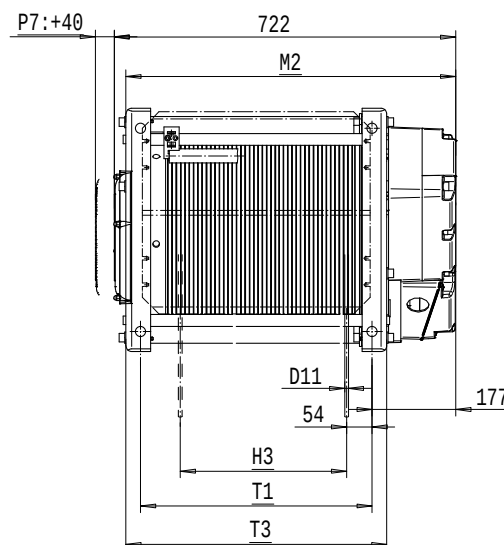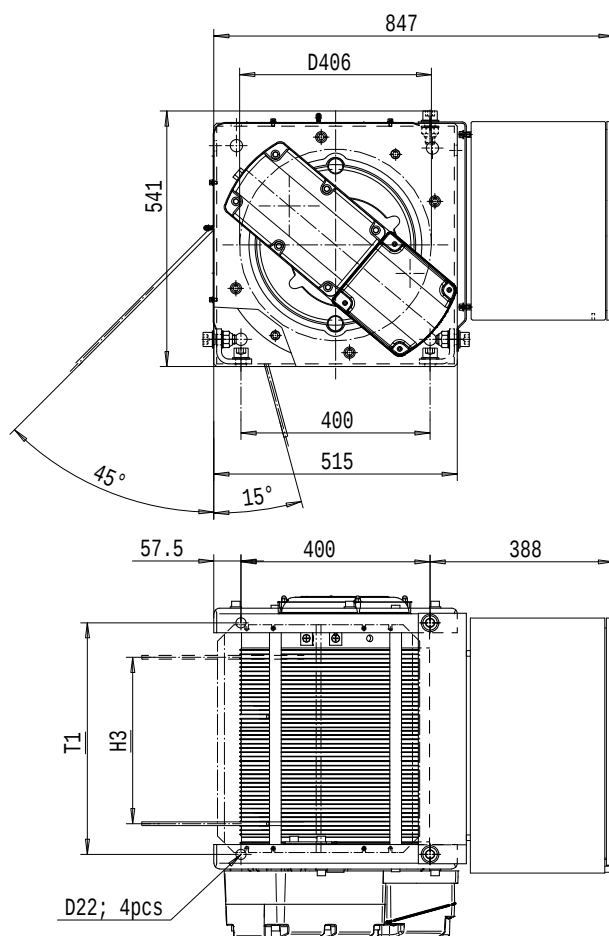

Note!
Max. rope angle from
drum groove +/-4°

Rope direction:


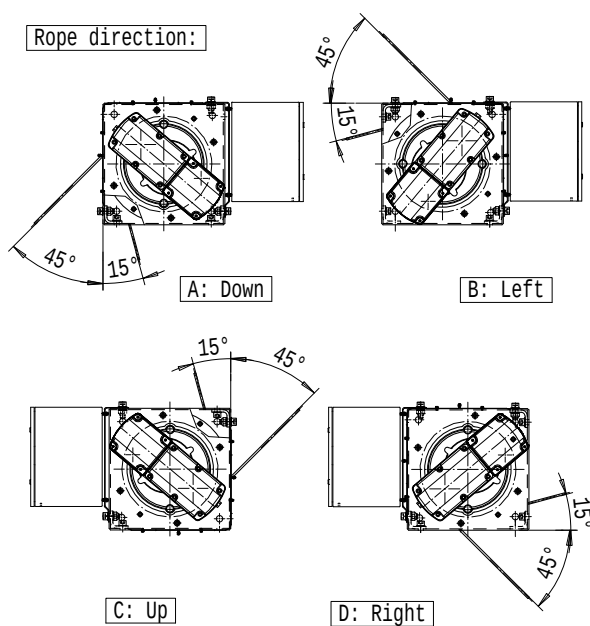


Load (kg)	Class Fem/ISO	Hoisting speed (m/min)			
		Gear+Motor code:			
		E+P5	F+P5	H+P6	J+P7
2000	3m/M6	16/2,7	20/3,3	32/5,3	40/6,7
2500	2m/M5	16/2,7	20/3,3	32/5,3	40/6,7
3150	1Am/M4	16/2,7	-	-	-
+ weight (kg):		-	-	30	40


HOL (m)	Length code	M2 (mm)	H3 (mm)	T1 (mm)	T3 (mm)	Weight (kg)
36	D	697	352	490	552	315
48	E	817	472	610	672	330
64	F	967	622	760	822	350
82	G	1157	812	950	1012	370

Drum groove var. 1


Hoist type:
NDM2V...

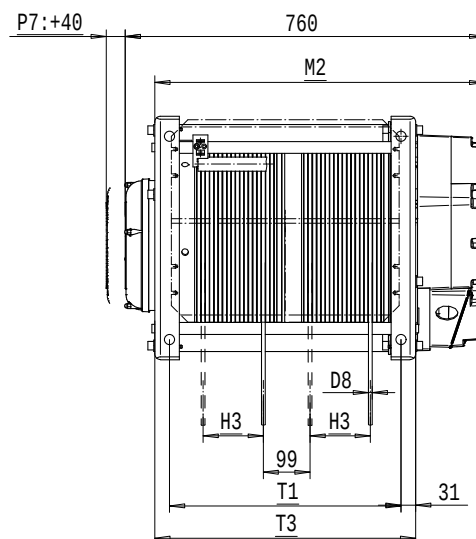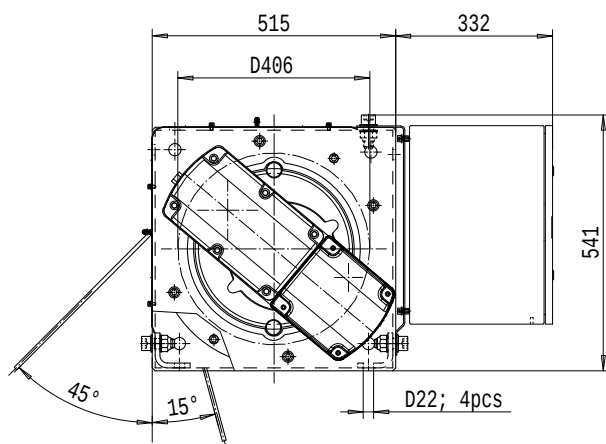

Note!
Max. rope angle from
drum groove $\pm 4^\circ$

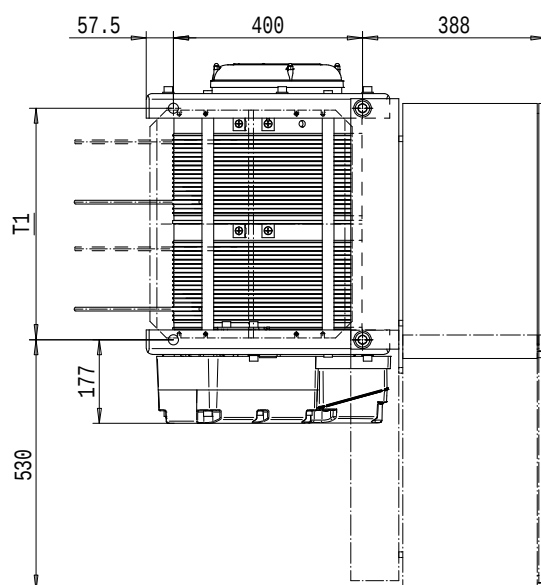

Rope direction:


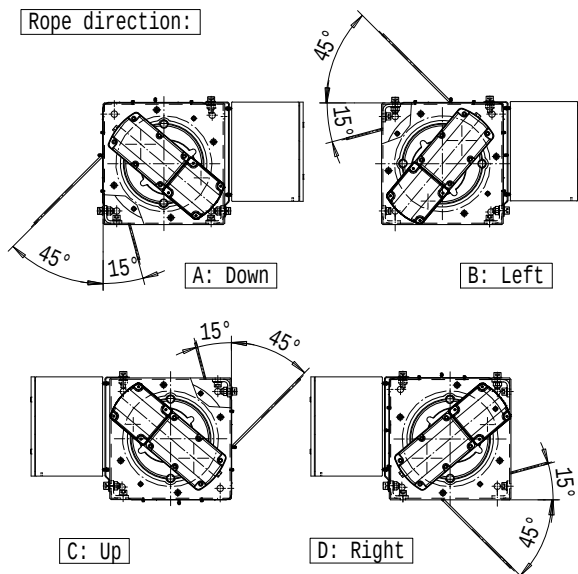


Load (kg)	Class Fem/ISO	Hoisting speed (m/min)			
		Gear+Motor code:			
		E+P5	F+P5	H+P6	J+P7
2000	3m/M6	16/2,7	20/3,3	32/5,3	40/6,7
2500	2m/M5	16/2,7	20/3,3	32/5,3	40/6,7
3150	1Am/M4	16/2,7	-	-	-
+ weight (kg):		-	-	30	40

HOL (m)	Length code	M2 (mm)	H3 (mm)	T1 (mm)	T3 (mm)	Weight (kg)
18	D	698	128	490	552	315
27	E	818	188	610	672	330
38	F	968	263	760	822	350
50	G	1158	358	950	1012	370

Drum groove var. 4


Hoist type:
NDM2V...

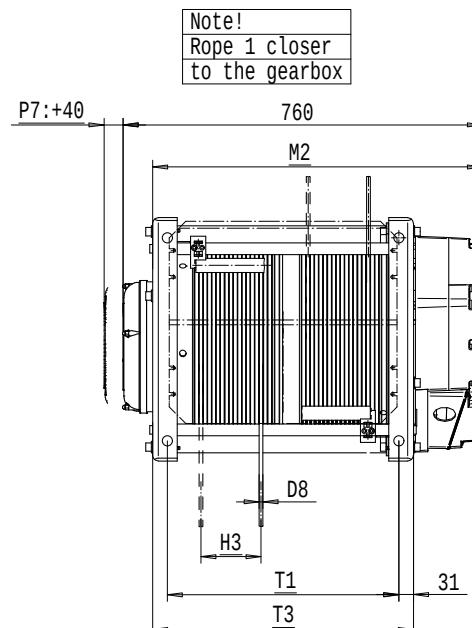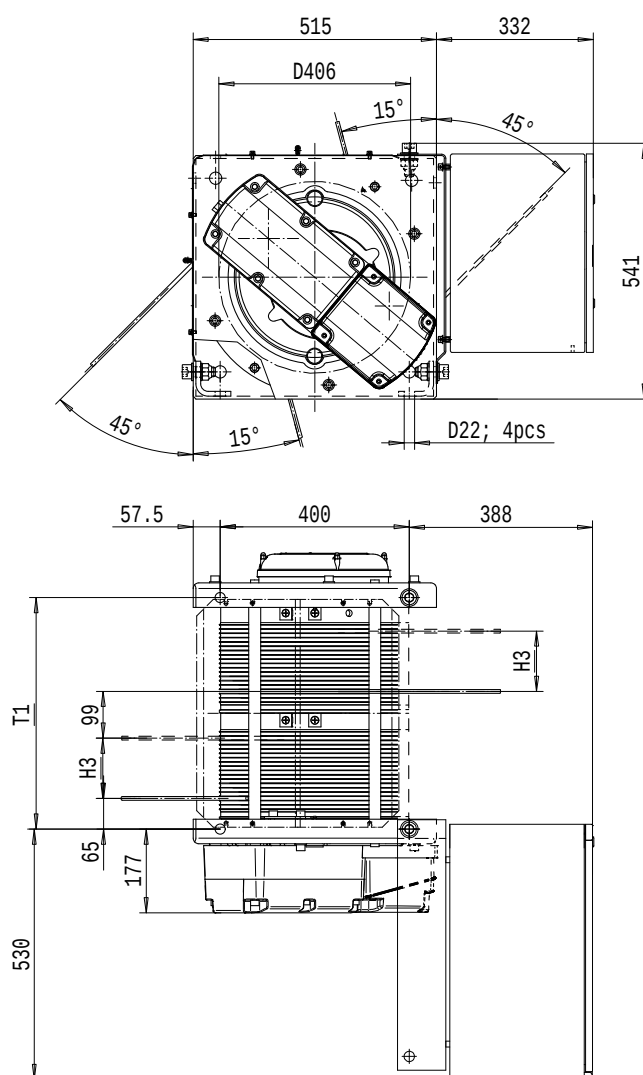

Note!
Rope 1 closer
to the gearbox

Note!
Max. rope angle from
drum groove +/-4°

Rope direction:

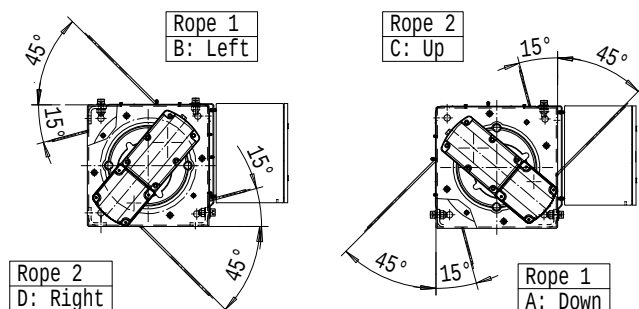

Load (kg)	Class Fem/ISO	Hoisting speed (m/min)			
		Gear+Motor code:			
		E+P5	F+P5	H+P6	J+P7
2000	3m/M6	16/2,7	20/3,3	32/5,3	40/6,7
2500	2m/M5	16/2,7	20/3,3	32/5,3	40/6,7
3150	1Am/M4	16/2,7	-	-	-
+ weight (kg):		-	-	30	40

HOL (m)	Length code	M2 (mm)	H3 (mm)	T1 (mm)	T3 (mm)	Weight (kg)
18	D	698	128	490	552	315
27	E	818	188	610	672	330
38	F	968	263	760	822	350
50	G	1158	358	950	1012	370

Drum groove var. 4